



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp®\_rate2006 = 104

Servidor Itaotec MX203 (Intel Xeon X5570)

SPECfp\_rate\_base2006 = 101

CPU2006 license: 9001


Test date: Dec-2009

Test sponsor: Itaotec

Hardware Availability: Mar-2009

Tested by: Itaotec

Software Availability: May-2009

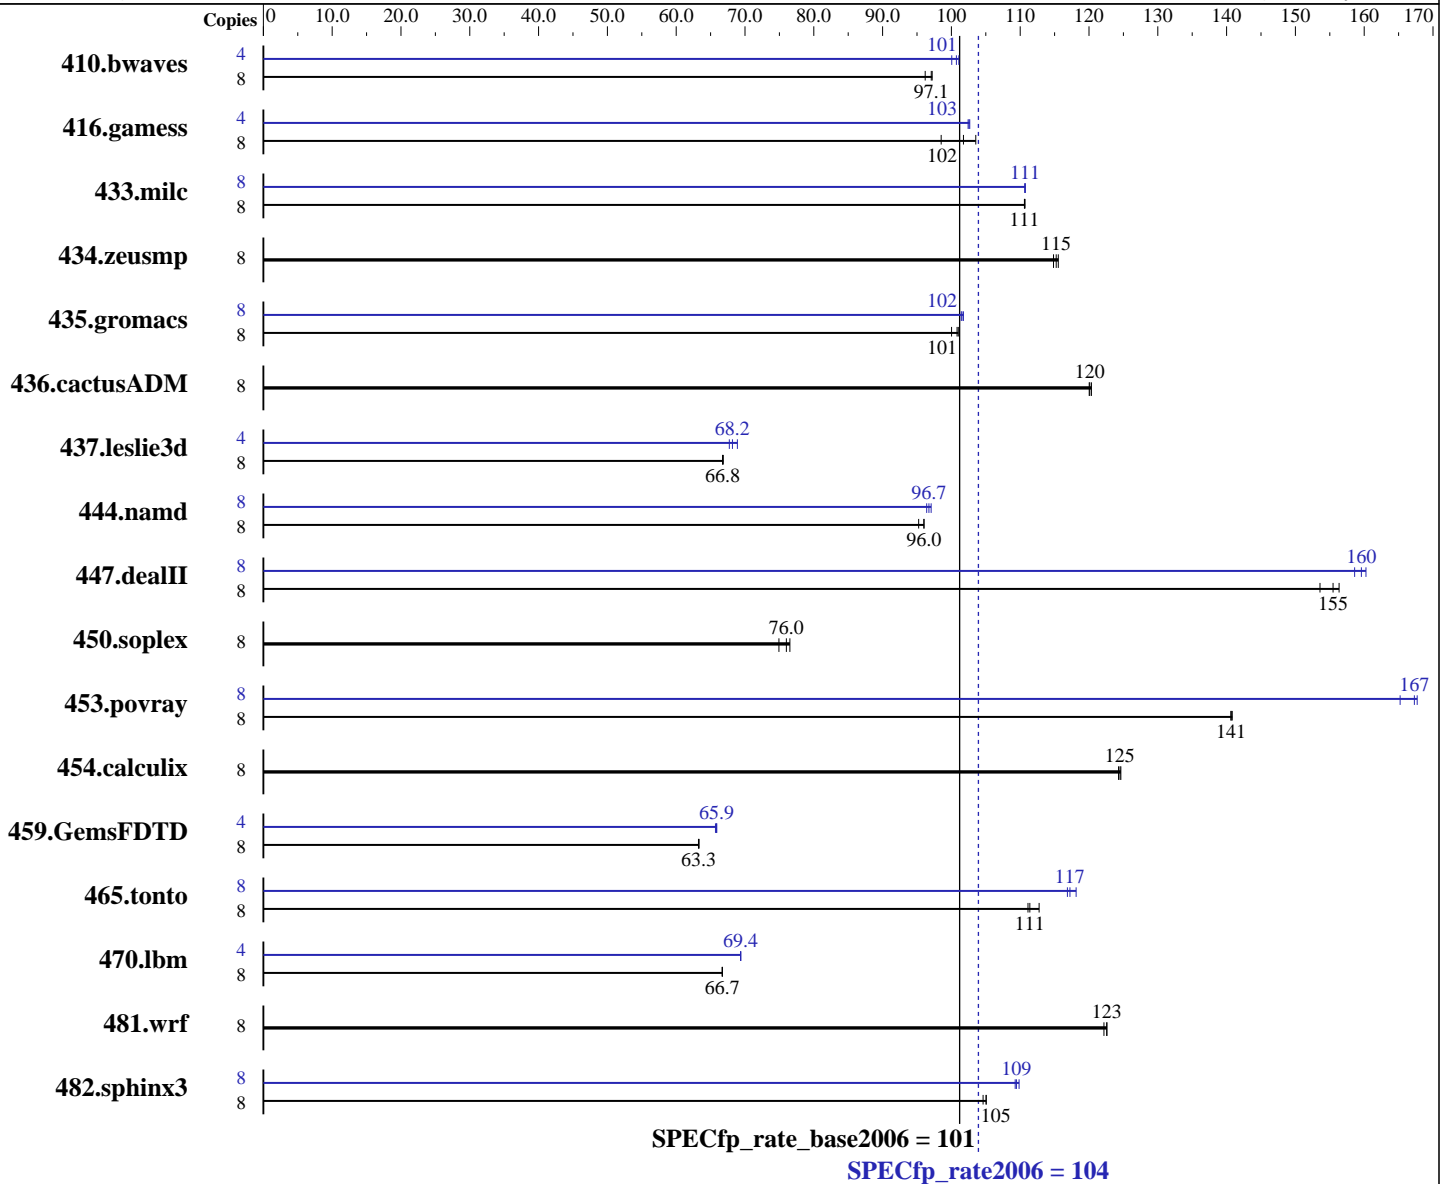

### Hardware

CPU Name: Intel Xeon X5570  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz  
 CPU MHz: 2930  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1, 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2 with patch Linux kernel 20090119, Kernel 2.6.16.60-0.34-smp  
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20090131 Package ID: l\_cproc\_p\_11.0.081, l\_cprof\_p\_11.0.081  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp\_rate2006 = 104

Servidor Itautec MX203 (Intel Xeon X5570)

SPECfp\_rate\_base2006 = 101

CPU2006 license: 9001

Test date: Dec-2009

Test sponsor: Itautec

Hardware Availability: Mar-2009

Tested by: Itautec

Software Availability: May-2009

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 12 GB (3 x 4GB DDR3-1333, CL 9, ECC)  
Disk Subsystem: 1 x 160 GB SATA-2, 7200RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1130	96.2	1118	97.2	<u>1120</u>	<u>97.1</u>	4	543	100	538	101	<u>540</u>	<u>101</u>
416.gamess	8	1513	104	1590	98.5	<u>1539</u>	<u>102</u>	4	<u>764</u>	<u>103</u>	765	102	763	103
433.milc	8	663	111	<u>664</u>	<u>111</u>	664	111	8	664	111	<u>663</u>	<u>111</u>	663	111
434.zeusmp	8	630	116	<u>632</u>	<u>115</u>	634	115	8	630	116	<u>632</u>	<u>115</u>	634	115
435.gromacs	8	<u>567</u>	<u>101</u>	571	100	566	101	8	561	102	<u>563</u>	<u>102</u>	563	101
436.cactusADM	8	796	120	<u>796</u>	<u>120</u>	794	120	8	796	120	<u>796</u>	<u>120</u>	794	120
437.leslie3d	8	1125	66.8	1127	66.7	<u>1126</u>	<u>66.8</u>	4	555	67.7	<u>552</u>	<u>68.2</u>	546	68.9
444.namd	8	<u>668</u>	<u>96.0</u>	674	95.2	668	96.0	8	<u>663</u>	<u>96.7</u>	666	96.4	661	97.1
447.dealII	8	596	154	<u>589</u>	<u>155</u>	585	156	8	577	159	571	160	<u>573</u>	<u>160</u>
450.soplex	8	890	74.9	<u>878</u>	<u>76.0</u>	872	76.5	8	890	74.9	<u>878</u>	<u>76.0</u>	872	76.5
453.povray	8	302	141	303	141	<u>303</u>	<u>141</u>	8	258	165	254	168	<u>254</u>	<u>167</u>
454.calculix	8	530	125	<u>530</u>	<u>125</u>	531	124	8	530	125	<u>530</u>	<u>125</u>	531	124
459.GemsFDTD	8	1342	63.2	1341	63.3	<u>1341</u>	<u>63.3</u>	4	<u>644</u>	<u>65.9</u>	646	65.7	644	65.9
465.tonto	8	708	111	698	113	<u>707</u>	<u>111</u>	8	666	118	674	117	<u>671</u>	<u>117</u>
470.lbm	8	<u>1648</u>	<u>66.7</u>	1648	66.7	1648	66.7	4	792	69.4	792	69.4	<u>792</u>	<u>69.4</u>
481.wrf	8	729	123	731	122	<u>729</u>	<u>123</u>	8	729	123	731	122	<u>729</u>	<u>123</u>
482.sphinx3	8	1491	105	<u>1484</u>	<u>105</u>	1484	105	8	1427	109	<u>1425</u>	<u>109</u>	1420	110

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.

## General Notes

This result was measured on the Servidor Itautec MX203.  
The Servidor Itautec MX203 and the Servidor Itautec MX223 are electronically equivalent.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 104

Servidor Itaotec MX203 (Intel Xeon X5570)

SPECfp\_rate\_base2006 = 101

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Dec-2009  
Hardware Availability: Mar-2009  
Software Availability: May-2009

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:  
-xSSE4.2 -ipo -O3 -no-prec-div -static



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 104

Servidor Itaotec MX203 (Intel Xeon X5570)

SPECfp\_rate\_base2006 = 101

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Dec-2009  
Hardware Availability: Mar-2009  
Software Availability: May-2009

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks:

icpc

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: ifort -m32

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias

470.lbm: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 104

Servidor Itaotec MX203 (Intel Xeon X5570)

SPECfp\_rate\_base2006 = 101

CPU2006 license: 9001

Test date: Dec-2009

Test sponsor: Itaotec

Hardware Availability: Mar-2009

Tested by: Itaotec

Software Availability: May-2009

## Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

### C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep-

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -opt-prefetch

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto

### Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp\_rate2006 = 104

Servidor Itautec MX203 (Intel Xeon X5570)

SPECfp\_rate\_base2006 = 101

CPU2006 license: 9001

Test date: Dec-2009

Test sponsor: Itautec

Hardware Availability: Mar-2009

Tested by: Itautec

Software Availability: May-2009

## Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itautec-Intel-ic11.0-fp-linux64-revI.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Itautec-Intel-ic11.0-fp-linux64-revI.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 06:24:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 19 January 2010.