



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp®_rate2006 = 51.4

NovaScale T810 F2 (Intel Core i3-540, 3.06 GHz)

SPECfp_rate_base2006 = 50.3

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Dec-2009

Hardware Availability: Jan-2010

Software Availability: Dec-2009

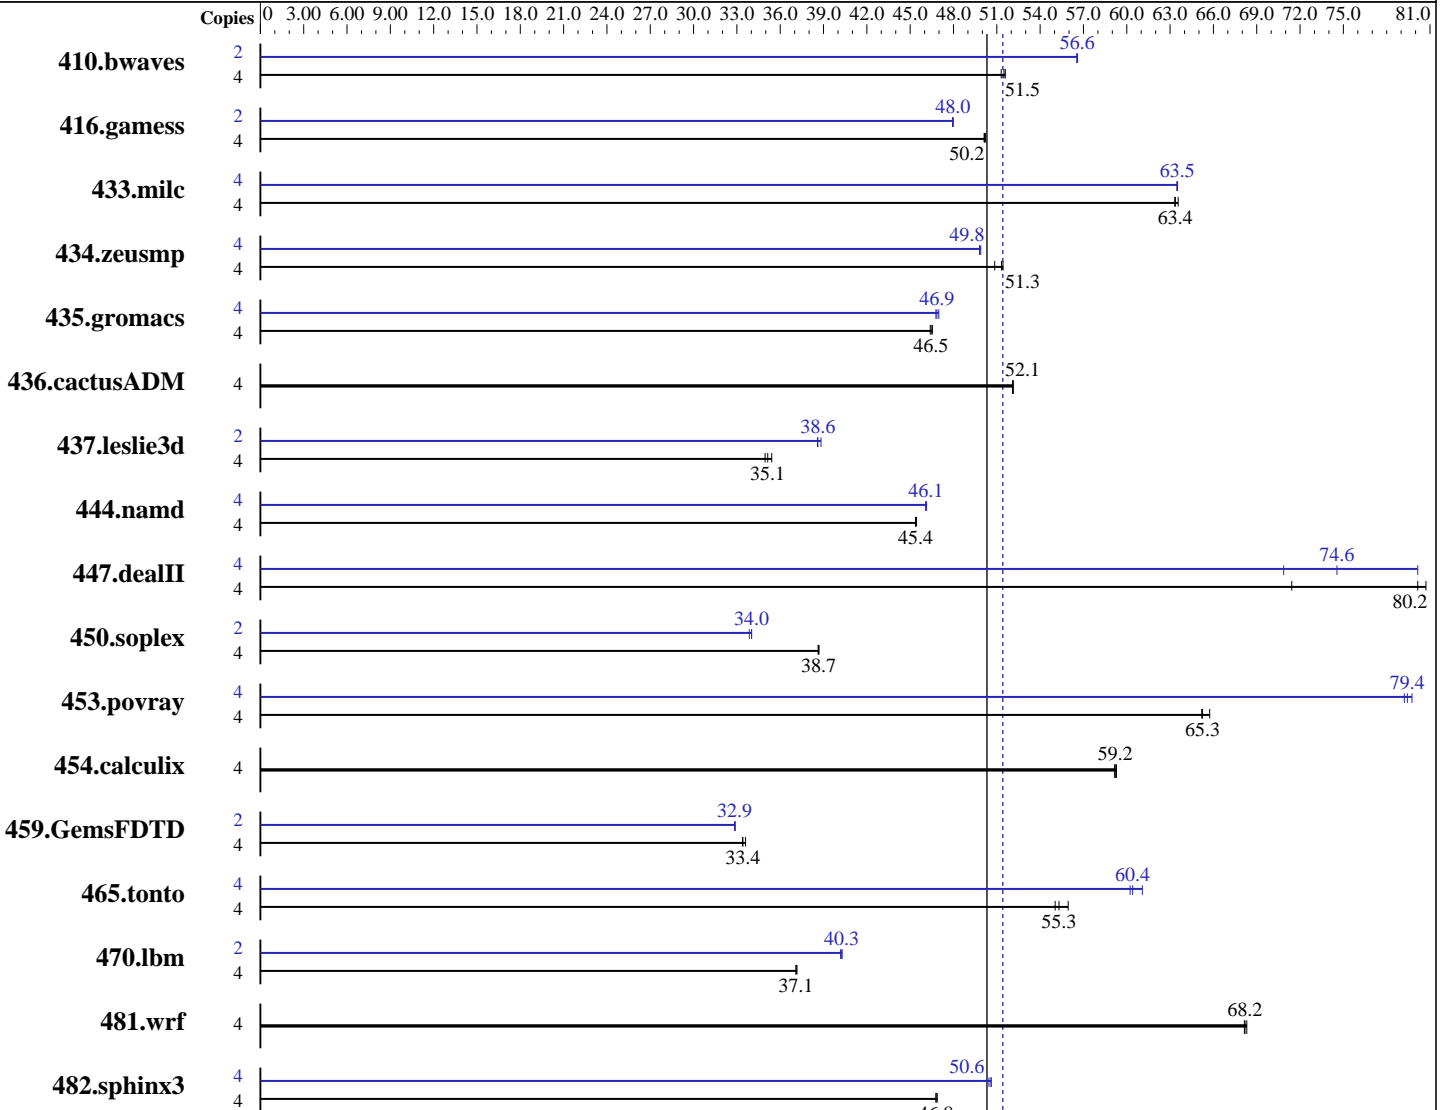

SPECfp_rate_base2006 = 50.3

SPECfp_rate2006 = 51.4

Hardware

CPU Name: Intel Core i3-540
 CPU Characteristics: 3067
 CPU MHz: 3067
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5
 Compiler: Intel Fortran Compiler and Intel C++ Compiler Professional Edition 11.1 For Linux Build 20091012 Package ID: l_cproc_p_11.1.059, l_cprof_p_11.1.059
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 51.4

NovaScale T810 F2 (Intel Core i3-540, 3.06 GHz)

SPECfp_rate_base2006 = 50.3

CPU2006 license: 20

Test date: Dec-2009

Test sponsor: Bull SAS

Hardware Availability: Jan-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

L3 Cache: 4 MB I+D on chip per chip
Other Cache: None
Memory: 8 GB (4 x 2 GB DDR3-1333 DR UDIMM)
Disk Subsystem: 1 x 160 GB 7200 RPM SATA
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1060	51.3	1054	51.6	1056	51.5	2	481	56.5	480	56.6	481	56.6
416.gamess	4	1559	50.2	1562	50.2	1563	50.1	2	817	48.0	817	47.9	816	48.0
433.milc	4	580	63.3	579	63.4	578	63.6	4	578	63.5	578	63.5	579	63.5
434.zeusmp	4	708	51.4	716	50.9	709	51.3	4	731	49.8	731	49.8	730	49.9
435.gromacs	4	614	46.5	616	46.4	615	46.5	4	610	46.9	608	47.0	611	46.8
436.cactusADM	4	917	52.1	918	52.1	917	52.1	4	917	52.1	918	52.1	917	52.1
437.leslie3d	4	1070	35.1	1062	35.4	1076	35.0	2	487	38.6	487	38.6	484	38.8
444.namd	4	707	45.4	707	45.4	706	45.4	4	696	46.1	696	46.1	695	46.1
447.dealII	4	571	80.2	641	71.4	567	80.7	4	571	80.2	614	74.6	646	70.9
450.soplex	4	864	38.6	862	38.7	863	38.7	2	490	34.0	490	34.0	493	33.9
453.povray	4	326	65.2	326	65.3	324	65.7	4	267	79.8	268	79.4	269	79.2
454.calculix	4	557	59.3	558	59.2	557	59.2	4	557	59.3	558	59.2	557	59.2
459.GemsFDTD	4	1270	33.4	1271	33.4	1263	33.6	2	646	32.9	646	32.9	645	32.9
465.tonto	4	712	55.3	704	55.9	715	55.0	4	652	60.4	653	60.2	644	61.1
470.lbm	4	1479	37.2	1481	37.1	1482	37.1	2	682	40.3	683	40.3	684	40.2
481.wrf	4	656	68.1	654	68.3	655	68.2	4	656	68.1	654	68.3	655	68.2
482.sphinx3	4	1663	46.9	1666	46.8	1666	46.8	4	1540	50.6	1541	50.6	1545	50.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

BIOS Settings:
Power Management = Maximum Performance (Default = Active Power Controller)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 51.4

NovaScale T810 F2 (Intel Core i3-540, 3.06 GHz)

SPECfp_rate_base2006 = 50.3

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Dec-2009
Hardware Availability: Jan-2010
Software Availability: Dec-2009

General Notes

The Dell PowerEdge T110 and the Bull NovaScale T810 F2 models are electronically equivalent. This result was measured on a Dell PowerEdge T110.

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 51.4

NovaScale T810 F2 (Intel Core i3-540, 3.06 GHz)

SPECfp_rate_base2006 = 50.3

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Dec-2009

Hardware Availability: Jan-2010

Software Availability: Dec-2009

Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 51.4

NovaScale T810 F2 (Intel Core i3-540, 3.06 GHz)

SPECfp_rate_base2006 = 50.3

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Dec-2009

Hardware Availability: Jan-2010

Software Availability: Dec-2009

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealIII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 51.4

NovaScale T810 F2 (Intel Core i3-540, 3.06 GHz)

SPECfp_rate_base2006 = 50.3

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Dec-2009

Hardware Availability: Jan-2010

Software Availability: Dec-2009

Peak Optimization Flags (Continued)

```
465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -unroll4 -auto -inline-calloc -opt-malloc-options=3
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
            -opt-prefetch -auto-ilp32
```

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-fp-linux64-revA.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-fp-linux64-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 06:31:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 February 2010.