



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

### SPECfp®\_rate2006 = 2300

### IBM Power 780 (3.86 GHz, 64 core, SLES)

### SPECfp\_rate\_base2006 = 2010

CPU2006 license: 11


Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

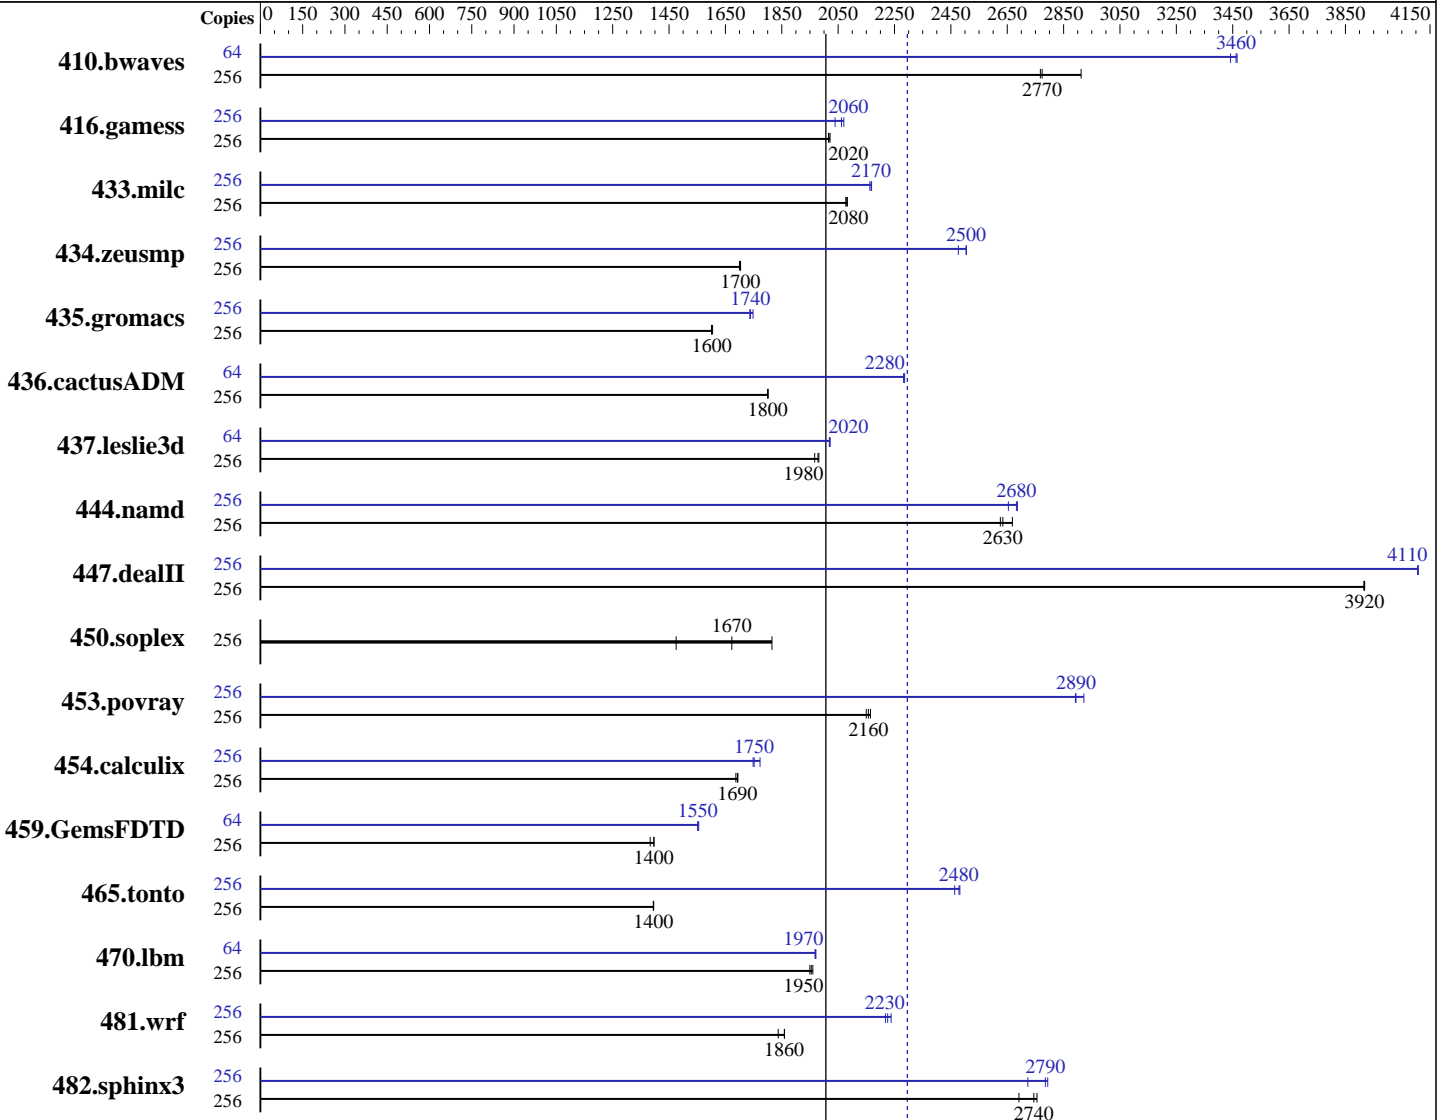

SPECfp\_rate\_base2006 = 2010

SPECfp\_rate2006 = 2300

#### Hardware

CPU Name: POWER7  
 CPU Characteristics: Intelligent Energy Optimization enabled, up to 3.94 GHz  
 CPU MHz: 3860  
 FPU: Integrated  
 CPU(s) enabled: 64 cores, 8 chips, 8 cores/chip, 4 threads/core  
 CPU(s) orderable: 8,16,24,32,48,64 cores  
 Primary Cache: 32 KB I + 32 KB D on chip per core

Continued on next page

#### Software

Operating System: SUSE Linux Enterprise Server 11 (ppc64), Kernel 2.6.27.19-5-ppc64  
 Compiler: IBM XL C/C++ for Linux, V10.1 Updated with the Oct2009 PTF  
 IBM XL Fortran for Linux, V12.1 Updated with the Oct2009 PTF  
 Auto Parallel: No  
 File System: ext3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 2300

IBM Power 780 (3.86 GHz, 64 core, SLES)

SPECfp\_rate\_base2006 = 2010

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 4 MB I+D on chip per core  
 Other Cache: None  
 Memory: 512 GB (64x8 GB) DDR3 1066 MHz  
 Disk Subsystem: 6x146.8 GB SAS SFF 15K RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: -Post-Link Optimization for Linux on POWER, Version 5.5.0-1  
 -MicroQuill SmartHeap 9

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	256	1257	2770	<u>1254</u>	<u>2770</u>	1195	2910	64	251	3470	253	3440	<u>251</u>	<u>3460</u>
416.gamess	256	<u>2485</u>	<u>2020</u>	2480	2020	2487	2020	256	2458	2040	<u>2431</u>	<u>2060</u>	2421	2070
433.milc	256	1131	2080	1128	2080	<u>1131</u>	<u>2080</u>	256	1087	2160	<u>1084</u>	<u>2170</u>	1084	2170
434.zeusmp	256	1370	1700	<u>1368</u>	<u>1700</u>	1367	1700	256	<u>930</u>	<u>2500</u>	941	2480	930	2500
435.gromacs	256	1142	1600	<u>1141</u>	<u>1600</u>	1139	1600	256	1046	1750	<u>1051</u>	<u>1740</u>	1053	1740
436.cactusADM	256	<u>1699</u>	<u>1800</u>	1700	1800	1698	1800	64	335	2280	<u>335</u>	<u>2280</u>	335	2290
437.leslie3d	256	1214	1980	1223	1970	<u>1216</u>	<u>1980</u>	64	298	2020	298	2020	<u>298</u>	<u>2020</u>
444.namd	256	782	2630	<u>779</u>	<u>2630</u>	769	2670	256	774	2650	764	2690	<u>765</u>	<u>2680</u>
447.dealII	256	747	3920	<u>748</u>	<u>3920</u>	748	3920	256	<u>713</u>	<u>4110</u>	713	4110	713	4110
450.soplex	256	<u>1276</u>	<u>1670</u>	1447	1480	1176	1820	256	<u>1276</u>	<u>1670</u>	1447	1480	1176	1820
453.povray	256	634	2150	629	2160	<u>631</u>	<u>2160</u>	256	471	2890	<u>471</u>	<u>2890</u>	466	2920
454.calculix	256	1247	1690	1252	1690	<u>1248</u>	<u>1690</u>	256	<u>1205</u>	<u>1750</u>	1208	1750	1191	1770
459.GemsFDTD	256	<u>1946</u>	<u>1400</u>	1944	1400	1964	1380	64	438	1550	<u>437</u>	<u>1550</u>	437	1560
465.tonto	256	<u>1806</u>	<u>1400</u>	1807	1390	1805	1400	256	1015	2480	<u>1016</u>	<u>2480</u>	1023	2460
470.lbm	256	1804	1950	<u>1800</u>	<u>1950</u>	1794	1960	64	447	1970	<u>446</u>	<u>1970</u>	446	1970
481.wrf	256	1556	1840	<u>1538</u>	<u>1860</u>	1538	1860	256	1289	2220	1278	2240	<u>1285</u>	<u>2230</u>
482.sphinx3	256	1854	2690	1811	2760	<u>1818</u>	<u>2740</u>	256	1832	2720	1786	2790	<u>1791</u>	<u>2790</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
 Benchmarks bound to a processor using numactl on the submit command.

## Operating System Notes

```
ulimit -s (stack) set to 1048576.
Large pages reserved as follows by root user:
echo 16896 > /proc/sys/vm/nr_hugepages
System configured with libhugetlbfs library for application access to large pages
Environment variables set before executing benchmarks.
export HUGETLB_VERBOSE=0
export HUGETLB_MORECORE=yes
export XLFRTIOPTS=intrinthds=1
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 2300

IBM Power 780 (3.86 GHz, 64 core, SLES)

SPECfp\_rate\_base2006 = 2010

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

## General Notes

IBM Post-Link optimization tool with  
 options "-O4 -omullX -see 0 -m power6" used for  
 433.milc 435.gromacs 436.cactusADM 482.sphinx3  
 options "-O4 -omullX -see 1" used for  
 436.cactusADM  
 options "-O4 -omullX -see 1 -ihf -1" used for  
 453.povray  
 options "-O4" used for  
 465.tonto  
 Whenever option "-omullX" was used during the optimization phase,  
 option "-imullX" was also used during the instrumentation phase.

## Base Compiler Invocation

C benchmarks:  
 xlc -qlanglvl=extc99

C++ benchmarks:  
 xlc

Fortran benchmarks:  
 xlf95

Benchmarks using both Fortran and C:  
 xlc -qlanglvl=extc99 xlf95

## Base Portability Flags

410.bwaves: -qfixed  
 416.gamess: -qfixed  
 434.zeusmp: -qfixed  
 435.gromacs: -qfixed -qextname  
 436.cactusADM: -qfixed -qextname  
 437.leslie3d: -qfixed  
 454.calculix: -qfixed -qextname  
 481.wrf: -DNOUNDERSCORE  
 482.sphinx3: -qchars=signed

## Base Optimization Flags

C benchmarks:  
 -O5 -qnoenablevmx -lhugetlbfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 2300

IBM Power 780 (3.86 GHz, 64 core, SLES)

SPECfp\_rate\_base2006 = 2010

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

## Base Optimization Flags (Continued)

C++ benchmarks:

-O5 -qrtti -qnoenablevmx -qstaticlink  
-Wl,--whole-archive /usr/lib/libhugetlbfs.a -Wl,--no-whole-archive

Fortran benchmarks:

-O5 -qsmallstack=dynlenonheap -qalias=nostd -qnoenablevmx  
-B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

-O5 -qnoenablevmx -qsmallstack=dynlenonheap -qalias=nostd  
-B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT

## Base Other Flags

C benchmarks:

-qipa=noobject -qipa=threads

C++ benchmarks:

-qipa=noobject -qipa=threads

Fortran benchmarks:

-qipa=noobject -qipa=threads

Benchmarks using both Fortran and C:

-qipa=noobject -qipa=threads

## Peak Compiler Invocation

C benchmarks:

xlc -qlanglvl=extc99

C++ benchmarks:

xlC

Fortran benchmarks:

xlF95

Benchmarks using both Fortran and C:

xlc -qlanglvl=extc99 xlf95

## Peak Portability Flags

410.bwaves: -qfixed

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 2300

IBM Power 780 (3.86 GHz, 64 core, SLES)

SPECfp\_rate\_base2006 = 2010

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

## Peak Portability Flags (Continued)

```

416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DNOUNDERSCORE
482.sphinx3: -qchars=signed

```

## Peak Optimization Flags

C benchmarks:

433.milc: -Wl,-q -O5 -qnoenablevmx -lhugetlbfs

```

470.lbm: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto -qtune=auto
-B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
-q64

```

482.sphinx3: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -lhugetlbfs

C++ benchmarks:

444.namd: -qpdf1(pass 1) -qpdf2(pass 2) -O5

```

447.dealIII: -O5 -qrtti -qnoenablevmx -qstaticlink -Wl,-z,muldefs
-Wl,--whole-archive /usr/lib/libsmartheap.a
-Wl,--no-whole-archive

```

450.soplex: basepeak = yes

453.povray: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -lsmartheap

Fortran benchmarks:

410.bwaves: -O5 -qsmallstack=dynlenonheap -lhugetlbfs

```

416.gamess: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qalias=nostd
-qnoenablevmx

```

```

434.zeusmp: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto -qtune=auto
-qxlf90=nosignedzero -B/usr/share/libhugetlbfs/ -tl
-Wl,--hugetlbfs-link=BDT

```

```

437.leslie3d: -O5 -qsmallstack=dynlenonheap -qnoenablevmx
-B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 2300

IBM Power 780 (3.86 GHz, 64 core, SLES)

SPECfp\_rate\_base2006 = 2010

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Dec-2009

## Peak Optimization Flags (Continued)

459.GemsFDTD: -O5 -B/usr/share/libhugetlbfs/ -t1 -Wl,--hugetlbfs-link=BDT  
-q64

465.tonto: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -q64  
-lsmartheap64

Benchmarks using both Fortran and C:

435.gromacs: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -lhugetlbfs

436.cactusADM: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O2 -qarch=auto  
-qtune=auto -qnostrict -lhugetlbfs

454.calculix: -O4 -B/usr/share/libhugetlbfs/ -t1 -Wl,--hugetlbfs-link=BDT

481.wrf: -O5 -qnoenablevmx -q64 -lhugetlbfs

## Peak Other Flags

C benchmarks:

-qipa=noobject -qipa=threads

C++ benchmarks:

-qipa=noobject -qipa=threads

Fortran benchmarks:

-qipa=noobject -qipa=threads

Benchmarks using both Fortran and C:

-qipa=noobject -qipa=threads

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20100302.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20100302.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 2300

IBM Power 780 (3.86 GHz, 64 core, SLES)

SPECfp\_rate\_base2006 = 2010

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Mar-2010

Hardware Availability: Mar-2010

Software Availability: Dec-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 07:19:32 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 27 April 2010.