



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint®_rate2006 = 373

BladeSymphony BS320 (Intel Xeon X5680)

SPECint_rate_base2006 = 348

CPU2006 license: 872


Test date: May-2010

Test sponsor: HITACHI

Hardware Availability: May-2010

Tested by: HITACHI

Software Availability: Dec-2009

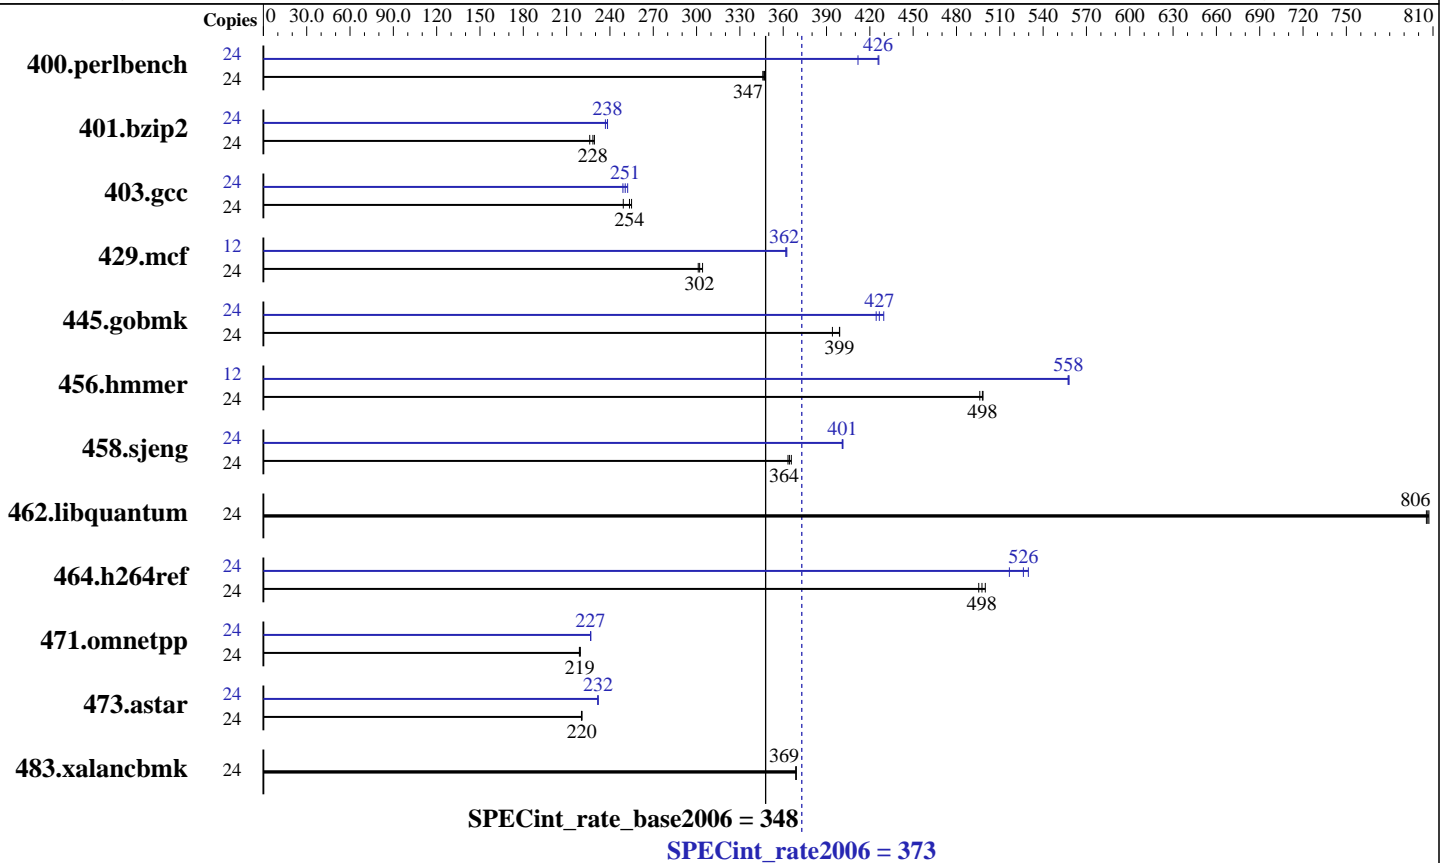

Hardware

CPU Name: Intel Xeon X5680
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 3333
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB(6 x 8 GB PC3-10600R, 2 rank, CL9-9-9)
 Disk Subsystem: 2 x 146 GB 10000 rpm Fibre Channel RAID1 configuration
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 5.4.3, Advanced Platform, Kernel 2.6.18-164.9.1.el5 on an x86_64
 Compiler: Intel C++ Compiler 11.1 for Linux Build 20091012 Package ID: l_cproc_p_11.1.059
 Auto Parallel: No
 File System: ext3
 System State: Multi-user run level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = 373

BladeSymphony BS320 (Intel Xeon X5680)

SPECint_rate_base2006 = 348

CPU2006 license: 872

Test sponsor: HITACHI

Tested by: HITACHI

Test date: May-2010

Hardware Availability: May-2010

Software Availability: Dec-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	677	347	676	347	678	346	24	551	426	550	426	569	412
401.bzip2	24	1015	228	1025	226	1010	229	24	972	238	978	237	972	238
403.gcc	24	775	249	758	255	762	254	24	771	251	776	249	766	252
429.mcf	24	727	301	720	304	724	302	12	302	363	302	362	302	362
445.gobmk	24	631	399	631	399	639	394	24	586	430	590	427	593	424
456.hammer	24	449	498	451	496	450	498	12	201	558	201	558	201	557
458.sjeng	24	794	366	797	364	799	363	24	724	401	723	401	724	401
462.libquantum	24	617	805	617	806	616	807	24	617	805	617	806	616	807
464.h264ref	24	1062	500	1072	495	1067	498	24	1003	530	1009	526	1028	517
471.omnetpp	24	685	219	684	219	683	219	24	662	227	662	227	662	227
473.astar	24	765	220	764	220	764	221	24	727	232	727	232	727	232
483.xalancbmk	24	449	369	449	369	449	369	24	449	369	449	369	449	369

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'/usr/bin/numactl' used to bind processes to CPUs

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = 373

BladeSymphony BS320 (Intel Xeon X5680)

SPECint_rate_base2006 = 348

CPU2006 license: 872

Test sponsor: HITACHI

Tested by: HITACHI

Test date: May-2010

Hardware Availability: May-2010

Software Availability: Dec-2009

Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/bsc/smartheap/lib -lsmartheap`

Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

`401.bzip2: icc -m64`

`456.hmmer: icc -m64`

`458.sjeng: icc -m64`

C++ benchmarks (except as noted below):

`icpc -m32`

`473.astar: icpc -m64`

Peak Portability Flags

`400.perlbench: -DSPEC_CPU_LINUX_IA32`

`401.bzip2: -DSPEC_CPU_LP64`

`456.hmmer: -DSPEC_CPU_LP64`

`458.sjeng: -DSPEC_CPU_LP64`

`462.libquantum: -DSPEC_CPU_LINUX`

`473.astar: -DSPEC_CPU_LP64`

`483.xalancbmk: -DSPEC_CPU_LINUX`



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = 373

BladeSymphony BS320 (Intel Xeon X5680)

SPECint_rate_base2006 = 348

CPU2006 license: 872

Test sponsor: HITACHI

Tested by: HITACHI

Test date: May-2010

Hardware Availability: May-2010

Software Availability: Dec-2009

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
 -L/home/bsc/smartheap/lib -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
 -L/home/bsc/smartheap/lib -lsmartheap64

483.xalanbmk: basepeak = yes

Peak Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = 373

BladeSymphony BS320 (Intel Xeon X5680)

SPECint_rate_base2006 = 348

CPU2006 license: 872

Test sponsor: HITACHI

Tested by: HITACHI

Test date: May-2010

Hardware Availability: May-2010

Software Availability: Dec-2009

Peak Other Flags (Continued)

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100427.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100427.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 08:55:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 June 2010.