



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®_rate2006 = 1470

ProLiant DL980 G7 (2.27 GHz, Intel Xeon X7560)

SPECint_rate_base2006 = 1380

CPU2006 license: 3


Test date: Aug-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: Oct-2010

Tested by: Hewlett-Packard Company

Software Availability: Mar-2010

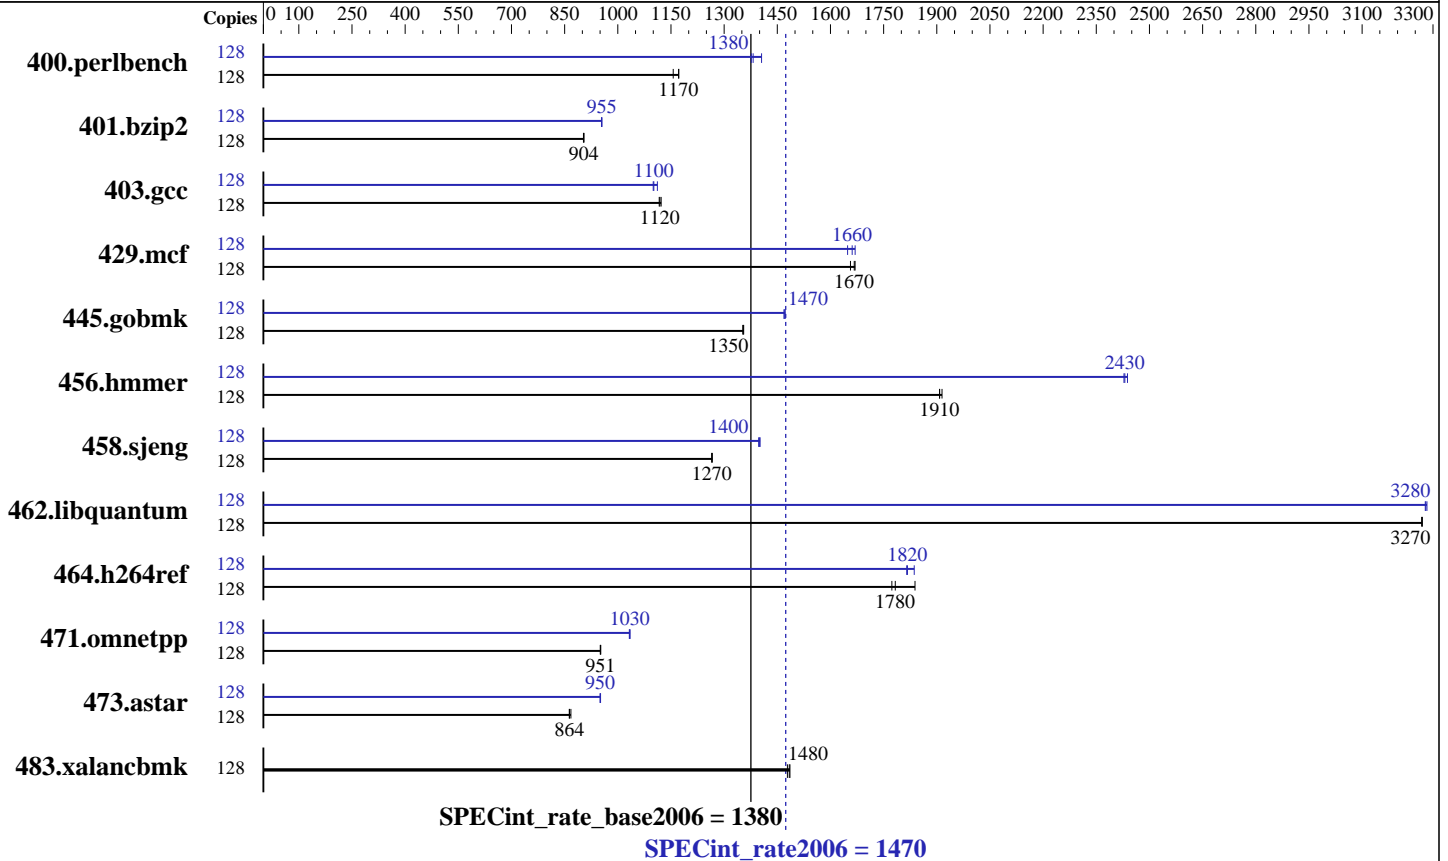

Hardware

CPU Name: Intel Xeon X7560
 CPU Characteristics: Intel Turbo Boost Technology up to 2.67 GHz
 CPU MHz: 2266
 FPU: Integrated
 CPU(s) enabled: 64 cores, 8 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 4, 8 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 24 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (128 x 2 GB PC3-10600R dual-rank)
 Disk Subsystem: 4 x 73 GB 15K 6Gb SAS
 Other Hardware: 512 MB Flash Backed Write Cache for P410i Smart Array

Software

Operating System: Red Hat Enterprise Linux Server release 5.5, Kernel 2.6.18-194.el5
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: 1_cproc_p_11.1.064
 Auto Parallel: No
 File System: ext3
 System State: Run level 5 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 1470

ProLiant DL980 G7 (2.27 GHz, Intel Xeon X7560)

SPECint_rate_base2006 = 1380

CPU2006 license: 3

Test date: Aug-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: Oct-2010

Tested by: Hewlett-Packard Company

Software Availability: Mar-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	128	1068	1170	1081	1160	1067	1170	128	905	1380	890	1410	908	1380
401.bzip2	128	1366	904	1368	903	1366	904	128	1294	955	1293	955	1295	954
403.gcc	128	918	1120	923	1120	921	1120	128	935	1100	937	1100	927	1110
429.mcf	128	699	1670	700	1670	705	1660	128	699	1670	708	1650	703	1660
445.gobmk	128	991	1360	993	1350	992	1350	128	914	1470	913	1470	912	1470
456.hammer	128	624	1910	626	1910	626	1910	128	492	2430	491	2430	490	2440
458.sjeng	128	1224	1270	1223	1270	1224	1270	128	1105	1400	1106	1400	1108	1400
462.libquantum	128	811	3270	812	3270	811	3270	128	809	3280	808	3280	809	3280
464.h264ref	128	1541	1840	1589	1780	1597	1770	128	1561	1820	1543	1840	1559	1820
471.omnetpp	128	842	950	841	951	841	952	128	774	1030	775	1030	773	1030
473.astar	128	1036	868	1041	864	1041	863	128	945	951	946	950	945	950
483.xalancbmk	128	595	1480	594	1490	597	1480	128	595	1480	594	1490	597	1480

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Platform Notes

Power Regulator set to HP Static High Performance Mode

General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 1470

ProLiant DL980 G7 (2.27 GHz, Intel Xeon X7560)

SPECint_rate_base2006 = 1380

CPU2006 license: 3

Test date: Aug-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: Oct-2010

Tested by: Hewlett-Packard Company

Software Availability: Mar-2010

Base Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 1470

ProLiant DL980 G7 (2.27 GHz, Intel Xeon X7560)

SPECint_rate_base2006 = 1380

CPU2006 license: 3

Test date: Aug-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: Oct-2010

Tested by: Hewlett-Packard Company

Software Availability: Mar-2010

Peak Portability Flags (Continued)

458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static
429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32
462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-prefetch
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmarheap
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmarheap64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 1470

ProLiant DL980 G7 (2.27 GHz, Intel Xeon X7560)

SPECint_rate_base2006 = 1380

CPU2006 license: 3

Test date: Aug-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: Oct-2010

Tested by: Hewlett-Packard Company

Software Availability: Mar-2010

Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 12:16:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 August 2010.