



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®_rate2006 = 137

PowerEdge R515 (AMD Opteron 4130, 2.60 GHz)

SPECfp_rate_base2006 = 124

CPU2006 license: 55


Test date: Jul-2010

Test sponsor: Dell Inc.

Hardware Availability: Jul-2010

Tested by: Dell Inc.

Software Availability: Jul-2010

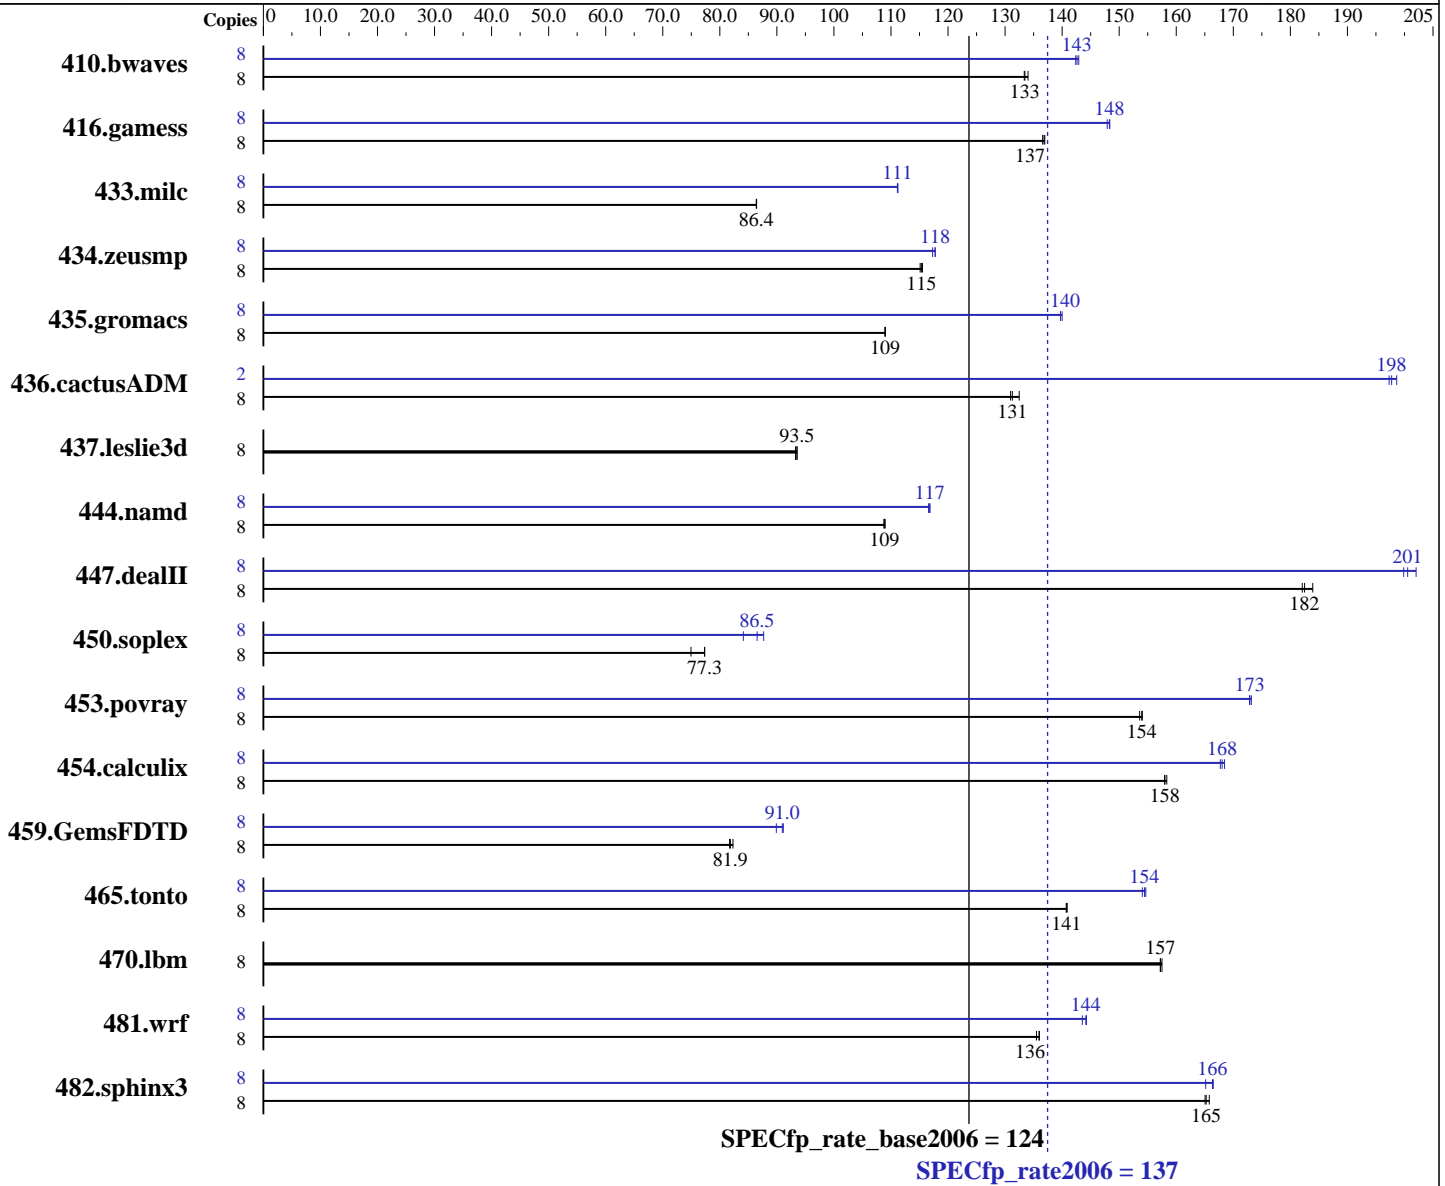

Hardware

CPU Name: AMD Opteron 4130
 CPU Characteristics: 2600
 CPU MHz: Integrated
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
 Kernel 2.6.27.19-5-default
 Compiler: x86 Open64 4.2.4 Compiler Suite (from AMD)
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 137

PowerEdge R515 (AMD Opteron 4130, 2.60 GHz)

SPECfp_rate_base2006 = 124

CPU2006 license: 55

Test date: Jul-2010

Test sponsor: Dell Inc.

Hardware Availability: Jul-2010

Tested by: Dell Inc.

Software Availability: Jul-2010

L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (8 x 4 GB 2Rx4 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 146 GB 10000 RPM SAS
 Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	815	133	811	134	815	133	8	764	142	761	143	762	143
416.gamess	8	1147	137	1145	137	1144	137	8	1056	148	1059	148	1056	148
433.milc	8	850	86.4	850	86.5	850	86.4	8	661	111	660	111	661	111
434.zeusmp	8	630	116	632	115	631	115	8	618	118	621	117	618	118
435.gromacs	8	524	109	524	109	524	109	8	408	140	409	140	409	140
436.cactusADM	8	728	131	730	131	722	132	2	121	197	120	199	121	198
437.leslie3d	8	804	93.5	806	93.3	804	93.5	8	804	93.5	806	93.3	804	93.5
444.namd	8	590	109	589	109	589	109	8	550	117	549	117	549	117
447.dealII	8	501	182	503	182	498	184	8	453	202	456	201	458	200
450.soplex	8	890	74.9	863	77.3	863	77.3	8	793	84.1	771	86.5	761	87.7
453.povray	8	276	154	277	154	276	154	8	246	173	246	173	246	173
454.calculix	8	417	158	418	158	418	158	8	392	168	393	168	394	168
459.GemsFDTD	8	1037	81.9	1039	81.7	1031	82.3	8	944	89.9	933	91.0	931	91.1
465.tonto	8	559	141	559	141	559	141	8	509	155	511	154	510	154
470.lbm	8	698	158	699	157	699	157	8	698	158	699	157	699	157
481.wrf	8	657	136	659	135	657	136	8	620	144	619	144	623	144
482.sphinx3	8	945	165	944	165	940	166	8	937	166	944	165	937	166

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=7168 in /etc/sysctl.conf
 mount -t hugetlbfs nodev /mnt/hugepages



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 137

PowerEdge R515 (AMD Opteron 4130, 2.60 GHz)

SPECfp_rate_base2006 = 124

CPU2006 license: 55

Test date: Jul-2010

Test sponsor: Dell Inc.

Hardware Availability: Jul-2010

Tested by: Dell Inc.

Software Availability: Jul-2010

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "896"

LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd1002-rate-libs-revC/64:/root/cpu2006-1.1/amd1002-rate-libs-revC/32"

OMP_NUM_THREADS = "4"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on SLES10 SP2 with binutils 2.18

Base Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
 -fno-second-underscore
 482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 137

PowerEdge R515 (AMD Opteron 4130, 2.60 GHz)

SPECfp_rate_base2006 = 124

CPU2006 license: 55

Test date: Jul-2010

Test sponsor: Dell Inc.

Hardware Availability: Jul-2010

Tested by: Dell Inc.

Software Availability: Jul-2010

Base Optimization Flags

C benchmarks:

-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m

C++ benchmarks:

-march=barcelona -mso -Ofast -static -INLINE:aggressive=on
-OPT:malloc_alg=1 -HP:bdt=2m

Fortran benchmarks:

-march=barcelona -mso -Ofast -HP

Benchmarks using both Fortran and C:

-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m -HP

Peak Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 137

PowerEdge R515 (AMD Opteron 4130, 2.60 GHz)

SPECfp_rate_base2006 = 124

CPU2006 license: 55

Test date: Jul-2010

Test sponsor: Dell Inc.

Hardware Availability: Jul-2010

Tested by: Dell Inc.

Software Availability: Jul-2010

Peak Optimization Flags

C benchmarks:

433.milc: -march=barcelona -mso -Ofast -CG:movnti=1
-CG:local_sched_alg=1 -CG:locs_shallow_depth=1
-HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: basepeak = yes

482.sphinx3: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
-CG:sse_cse_regs=0 -CG:locs_shallow_depth=1 -CG:cmp_peep=on
-CG:local_sched_alg=1 -INLINE:aggressive=on

C++ benchmarks:

444.namd: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
-CG:local_sched_alg=2 -CG:load_exe=0 -CG:compute_to=on
-OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.deallI: -march=barcelona -mso -Ofast -static -INLINE:aggressive=on
-LNO:opt=0 -fno-emit-exceptions -m32
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
-CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
-CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: -march=barcelona -mso -O3 -OPT:Ofast -OPT:treeheight=on
-LNO:blocking=off -LNO:prefetch_ahead=5
-LNO:ignore_feedback=off -WOPT:aggstr=0 -HP:bdt=2m:heap=2m
-CG:cmp_peep=on

416.gamess: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -mso -Ofast -LNO:blocking=off
-LNO:interchange=off -OPT:treeheight=on -OPT:unroll_size=256
-CG:cmp_peep=on -GRA:prioritize_by_density=on -HP

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 137

PowerEdge R515 (AMD Opteron 4130, 2.60 GHz)

SPECfp_rate_base2006 = 124

CPU2006 license: 55

Test date: Jul-2010

Test sponsor: Dell Inc.

Hardware Availability: Jul-2010

Tested by: Dell Inc.

Software Availability: Jul-2010

Peak Optimization Flags (Continued)

437.leslie3d: basepeak = yes

459.GemsFDTD: -march=barcelona -mso -Ofast -LNO:fission=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:local_sched_alg=1
-HP

465.tonto: -march=barcelona -mso -Ofast
-OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -mso -Ofast -OPT:rsqrt=2
-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -apo -LNO:prefetch_ahead=1
-HP:bdt=2m:heap=2m -LANG:heap_allocation_threshold=100

454.calculix: -march=barcelona -mso -Ofast -CG:load_exe=0
-CG:ptr_load_use=0 -CG:local_sched_alg=2 -CG:compute_to=on
-LNO:prefetch_ahead=30 -WOPT:unroll=2
-GRA:optimize_boundary=on -HP:bdt=2m:heap=2m

481.wrf: -march=barcelona -mso -Ofast -LNO:blocking=off
-LNO:prefetch_ahead=10 -LANG:copyinout=off
-IPA:callee_limit=5000 -GRA:prioritize_by_density=on -m3dnow
-HP

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html>
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml>
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 14:40:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 October 2010.