



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint®_rate2006 = 278

Sun Fire X4270 M2 (Intel Xeon L5640 2.27 GHz)

SPECint_rate_base2006 = 259

CPU2006 license: 6


Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Sep-2010

Hardware Availability: Jun-2010

Software Availability: Apr-2010

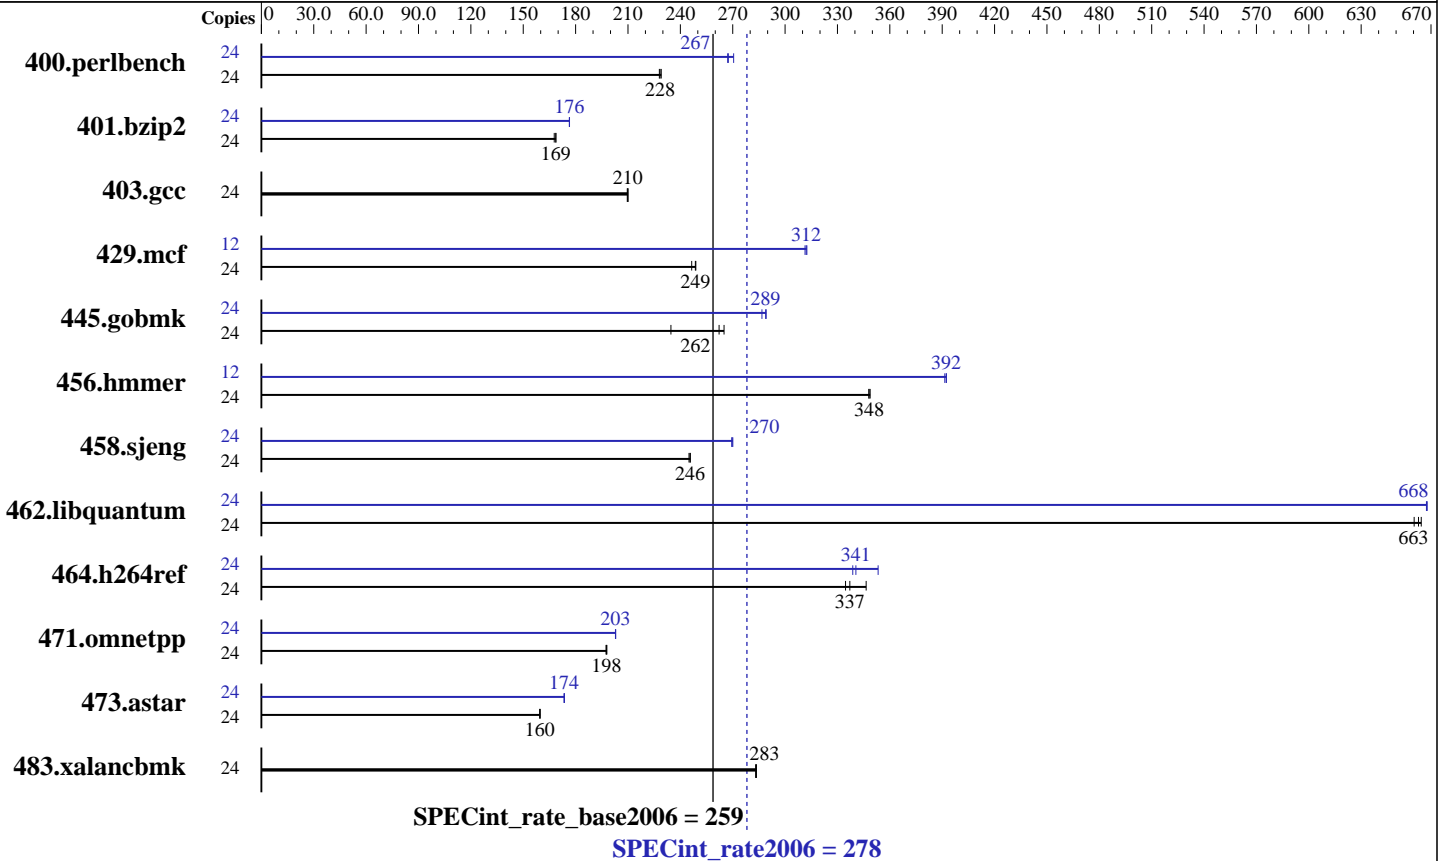

Hardware

CPU Name: Intel Xeon L5640
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2267
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1 or 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 146 GB SAS, 10000 RPM
 Other Hardware: None

Software

Operating System: Oracle Enterprise Linux Server release 5.5 kernel 2.6.18-194.el5
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: 1_cproc_p_11.1.064
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint_rate2006 = 278

Sun Fire X4270 M2 (Intel Xeon L5640 2.27 GHz)

SPECint_rate_base2006 = 259

CPU2006 license: 6

Test date: Sep-2010

Test sponsor: Oracle Corporation

Hardware Availability: Jun-2010

Tested by: Oracle Corporation

Software Availability: Apr-2010

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	24	1024	229	1029	228	<u>1027</u>	<u>228</u>	24	867	271	<u>877</u>	<u>267</u>	878	267		
401.bzip2	24	1373	169	1381	168	<u>1373</u>	<u>169</u>	24	1313	176	1312	177	<u>1312</u>	<u>176</u>		
403.gcc	24	922	210	920	210	<u>921</u>	<u>210</u>	24	922	210	920	210	<u>921</u>	<u>210</u>		
429.mcf	24	888	247	<u>880</u>	<u>249</u>	879	249	12	<u>351</u>	<u>312</u>	351	311	350	312		
445.gobmk	24	950	265	<u>960</u>	<u>262</u>	1073	235	24	<u>872</u>	<u>289</u>	871	289	878	287		
456.hammer	24	642	349	643	348	<u>643</u>	<u>348</u>	12	285	392	<u>285</u>	<u>392</u>	286	391		
458.sjeng	24	1182	246	1185	245	<u>1183</u>	<u>246</u>	24	<u>1077</u>	<u>270</u>	1078	269	1075	270		
462.libquantum	24	<u>750</u>	<u>663</u>	753	660	748	664	24	745	667	<u>745</u>	<u>668</u>	745	668		
464.h264ref	24	1587	335	1533	346	<u>1576</u>	<u>337</u>	24	1503	353	1568	339	<u>1560</u>	<u>341</u>		
471.omnetpp	24	760	197	758	198	<u>759</u>	<u>198</u>	24	739	203	<u>739</u>	<u>203</u>	740	203		
473.astar	24	<u>1056</u>	<u>160</u>	1057	159	1055	160	24	970	174	<u>971</u>	<u>174</u>	972	173		
483.xalancbmk	24	<u>584</u>	<u>283</u>	585	283	584	284	24	<u>584</u>	<u>283</u>	585	283	584	284		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used to invoke the command numactl to bind copies to the cores. (For details, please see the config file.)

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

Load Default BIOS Settings and then change the following
C-State Disabled
Data Reuse Optimization Disabled
Hardware Prefetch Enabled
Adjacent Cache Line Prefetch Enabled
L1 Data Prefetch Enabled

General Notes

This result is measured on a Sun Fire X4170 M2 server. The Sun Fire X4170 M2 and the Sun Fire X4270 M2 are electronically equivalent.



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint_rate2006 = 278

Sun Fire X4270 M2 (Intel Xeon L5640 2.27 GHz)

SPECint_rate_base2006 = 259

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Sep-2010

Hardware Availability: Jun-2010

Software Availability: Apr-2010

Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L(path to library) -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):

icpc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint_rate2006 = 278

Sun Fire X4270 M2 (Intel Xeon L5640 2.27 GHz)

SPECint_rate_base2006 = 259

CPU2006 license: 6

Test date: Sep-2010

Test sponsor: Oracle Corporation

Hardware Availability: Jun-2010

Tested by: Oracle Corporation

Software Availability: Apr-2010

Peak Compiler Invocation (Continued)

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
 401.bzip2: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: basepeak = yes

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll2 -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint_rate2006 = 278

Sun Fire X4270 M2 (Intel Xeon L5640 2.27 GHz)

SPECint_rate_base2006 = 259

CPU2006 license: 6

Test date: Sep-2010

Test sponsor: Oracle Corporation

Hardware Availability: Jun-2010

Tested by: Oracle Corporation

Software Availability: Apr-2010

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L(path to library) -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
-L(path to library) -lsmartheap64

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE-pathfix-smartheap.20101027.html>
http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.20101027.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE-pathfix-smartheap.20101027.xml>
http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.20101027.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 14:16:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 October 2010.