



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

**SPECint®2006 = 25.0**

### IBM System x3630 M3 (Intel Xeon E5507)

**SPECint\_base2006 = 22.9**

CPU2006 license: 11


Test date: Oct-2010

Test sponsor: IBM Corporation

Hardware Availability: Oct-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

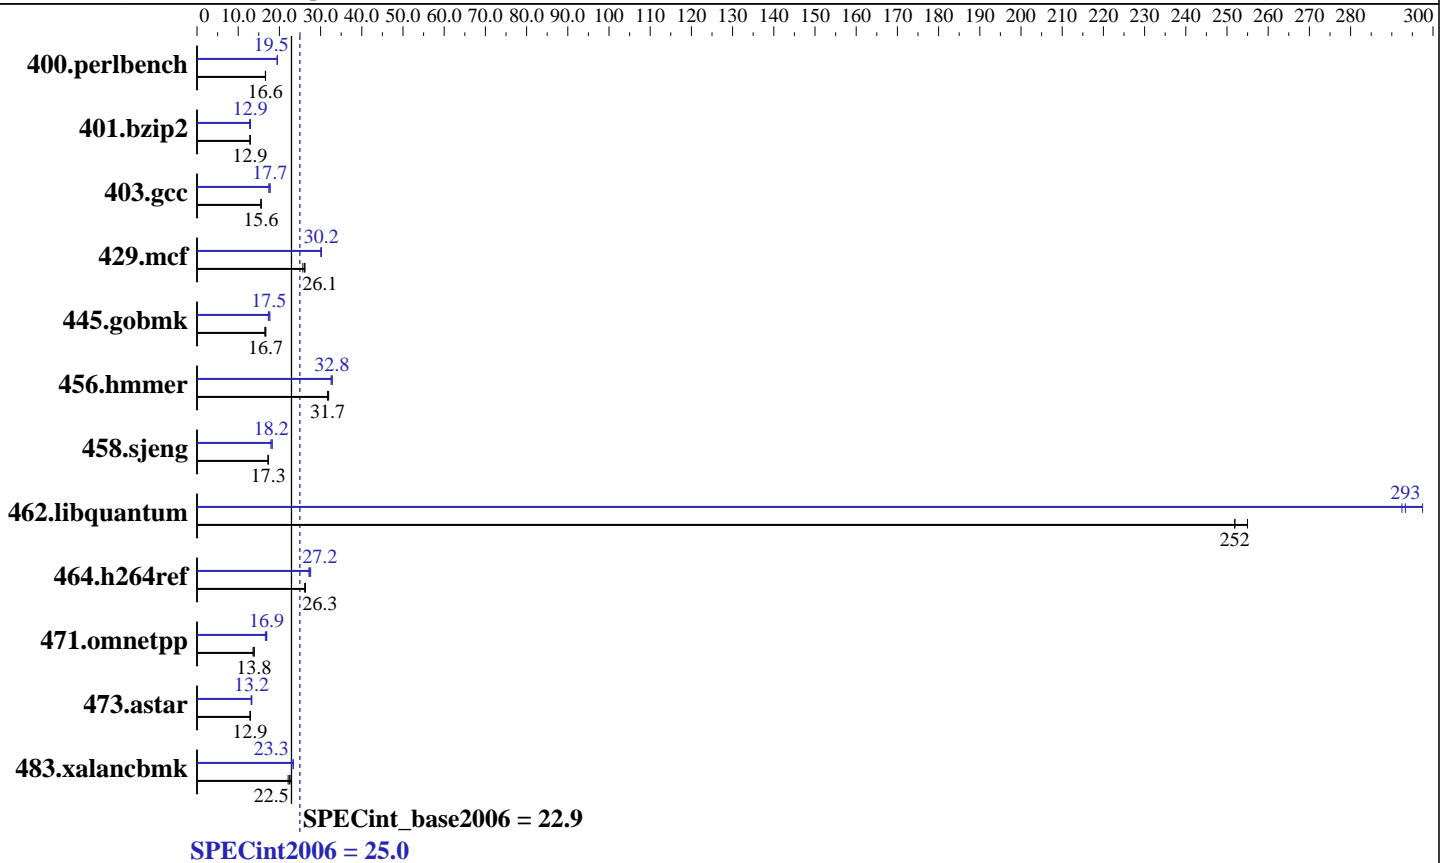

### Hardware

CPU Name: Intel Xeon E5507  
 CPU Characteristics:  
 CPU MHz: 2267  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 4 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R, ECC, running at 800 MHz and CL6)  
 Disk Subsystem: 1 x 146 GB SAS, 15000 RPM  
 Other Hardware: None

### Software

Operating System: SuSe Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: 1\_cproc\_p\_11.1.064  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 25.0

IBM System x3630 M3 (Intel Xeon E5507)

SPECint\_base2006 = 22.9

CPU2006 license: 11

Test date: Oct-2010

Test sponsor: IBM Corporation

Hardware Availability: Oct-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<b>588</b>	<b>16.6</b>	587	16.7	588	16.6	502	19.5	500	19.5	<b>502</b>	<b>19.5</b>
401.bzip2	<b>750</b>	<b>12.9</b>	750	12.9	746	12.9	<b>747</b>	<b>12.9</b>	743	13.0	756	12.8
403.gcc	516	15.6	<b>517</b>	<b>15.6</b>	519	15.5	454	17.7	<b>454</b>	<b>17.7</b>	462	17.4
429.mcf	<b>349</b>	<b>26.1</b>	348	26.2	355	25.7	<b>302</b>	<b>30.2</b>	302	30.2	303	30.1
445.gobmk	629	16.7	<b>629</b>	<b>16.7</b>	637	16.5	593	17.7	606	17.3	<b>600</b>	<b>17.5</b>
456.hammer	<b>294</b>	<b>31.7</b>	294	31.7	292	32.0	<b>284</b>	<b>32.8</b>	284	32.8	287	32.5
458.sjeng	<b>700</b>	<b>17.3</b>	701	17.3	699	17.3	675	17.9	664	18.2	<b>664</b>	<b>18.2</b>
462.libquantum	82.3	252	<b>82.3</b>	<b>252</b>	81.3	255	69.7	297	<b>70.6</b>	<b>293</b>	70.8	292
464.h264ref	<b>842</b>	<b>26.3</b>	846	26.2	842	26.3	802	27.6	813	27.2	<b>813</b>	<b>27.2</b>
471.omnetpp	<b>452</b>	<b>13.8</b>	450	13.9	460	13.6	377	16.6	<b>370</b>	<b>16.9</b>	370	16.9
473.astar	541	13.0	544	12.9	<b>544</b>	<b>12.9</b>	528	13.3	534	13.1	<b>530</b>	<b>13.2</b>
483.xalancbmk	302	22.8	<b>307</b>	<b>22.5</b>	312	22.1	301	22.9	295	23.4	<b>296</b>	<b>23.3</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Platform Notes

BIOS Settings:  
Turbo Mode Enable  
Turbo Boost set to Traditional  
CPU C State Enable

## General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502  
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to granularity=fine,scatter

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 25.0

IBM System x3630 M3 (Intel Xeon E5507)

SPECint\_base2006 = 22.9

CPU2006 license: 11

Test date: Oct-2010

Test sponsor: IBM Corporation

Hardware Availability: Oct-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

## Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

## Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64`

## Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

`400.perlbench: icc -m32`

`429.mcf: icc -m32`

`445.gobmk: icc -m32`

`464.h264ref: icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 25.0

IBM System x3630 M3 (Intel Xeon E5507)

SPECint\_base2006 = 22.9

CPU2006 license: 11

Test date: Oct-2010

Test sponsor: IBM Corporation

Hardware Availability: Oct-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

## Peak Compiler Invocation (Continued)

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
 401.bzip2: -DSPEC\_CPU\_LP64  
 403.gcc: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div -static(pass 2) -prof-use(pass 2)  
 -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc  
 -opt-malloc-options=3 -auto-ilp32

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll4

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel  
 -opt-prefetch -par-schedule-static=32768 -ansi-alias

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll2 -ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 25.0

IBM System x3630 M3 (Intel Xeon E5507)

SPECint\_base2006 = 22.9

CPU2006 license: 11

Test date: Oct-2010

Test sponsor: IBM Corporation

Hardware Availability: Oct-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100929.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100929.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 13:55:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 9 November 2010.