



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Acer AW2000h-AW170h F1 (Intel Xeon L5609, 1.86 GHz)

**SPECint®\_rate2006 = 146**

**SPECint\_rate\_base2006 = 135**

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jul-2010

Hardware Availability: Aug-2010

Software Availability: Jan-2010

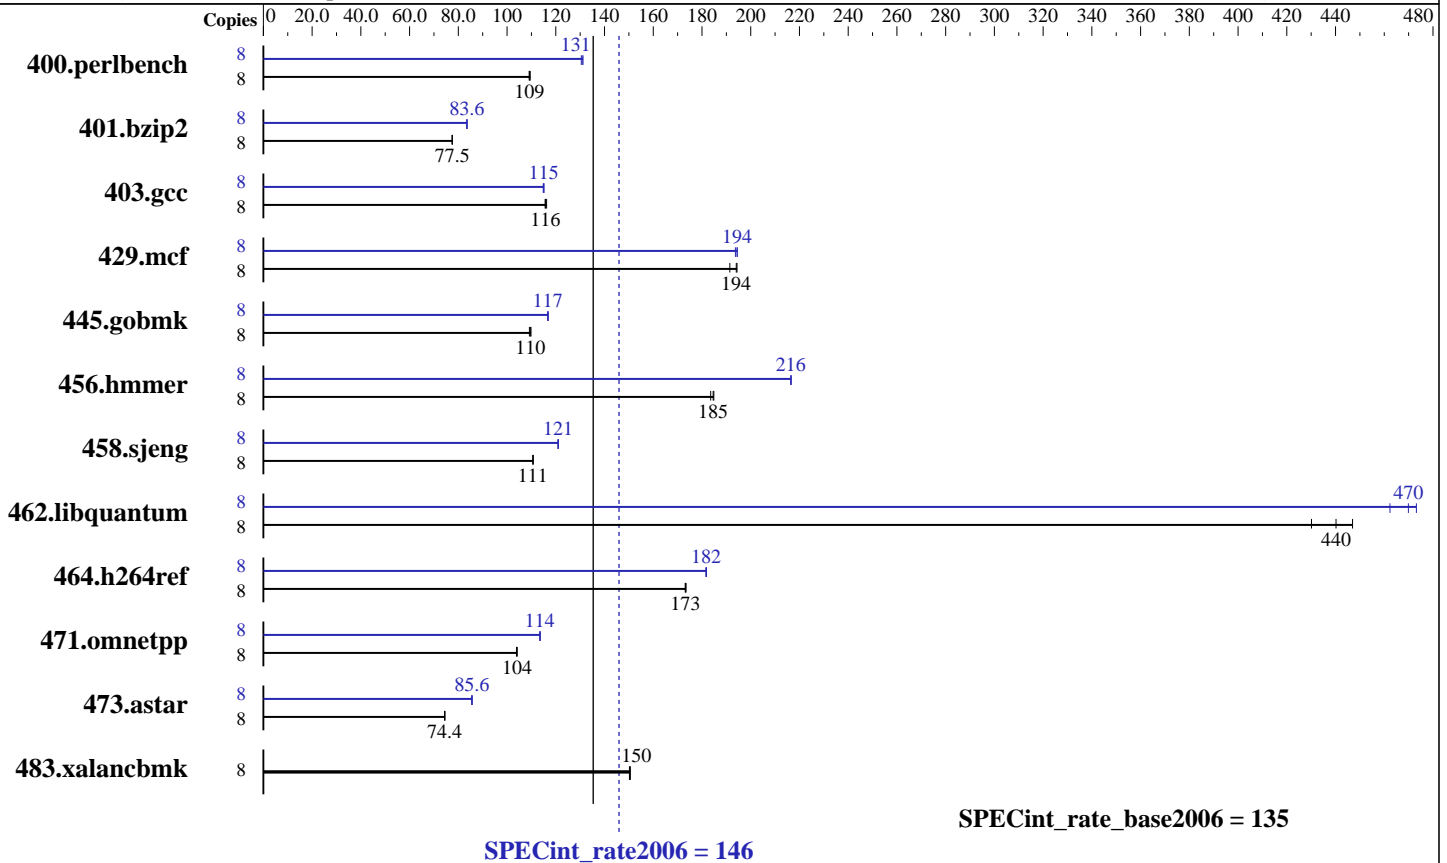

### Hardware

CPU Name: Intel Xeon L5609  
 CPU Characteristics: 1866  
 CPU MHz: 1866  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB 2Rx8 PC3-10600R-9, ECC, memory runs at 1066 MHz)  
 Disk Subsystem: 1 x 1000 GB SATA II, 7200 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
 Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1  
 Build 20091130 Package ID: l\_cproc\_p\_11.1.064  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Acer AW2000h-AW170h F1 (Intel Xeon L5609, 1.86 GHz)

SPECint\_rate2006 = 146

SPECint\_rate\_base2006 = 135

CPU2006 license: 97  
Test sponsor: Acer Incorporated  
Tested by: Acer Incorporated

Test date: Jul-2010  
Hardware Availability: Aug-2010  
Software Availability: Jan-2010

## Results Table

| Benchmark      | Base   |                    |                   |                   |                    |                   | Peak               |        |                   |                    |                   |                   |                   |                    |
|----------------|--------|--------------------|-------------------|-------------------|--------------------|-------------------|--------------------|--------|-------------------|--------------------|-------------------|-------------------|-------------------|--------------------|
|                | Copies | Seconds            | Ratio             | Seconds           | Ratio              | Seconds           | Ratio              | Copies | Seconds           | Ratio              | Seconds           | Ratio             | Seconds           | Ratio              |
| 400.perlbench  | 8      | 717                | 109               | <b><u>715</u></b> | <b><u>109</u></b>  | 714               | 109                | 8      | <b><u>597</u></b> | <b><u>131</u></b>  | 599               | 130               | 596               | 131                |
| 401.bzip2      | 8      | 996                | 77.5              | 996               | 77.5               | <b><u>996</u></b> | <b><u>77.5</u></b> | 8      | 924               | 83.6               | 925               | 83.5              | <b><u>924</u></b> | <b><u>83.6</u></b> |
| 403.gcc        | 8      | 557                | 116               | <b><u>556</u></b> | <b><u>116</u></b>  | 554               | 116                | 8      | 559               | 115                | 561               | 115               | <b><u>560</u></b> | <b><u>115</u></b>  |
| 429.mcf        | 8      | 381                | 191               | 375               | 194                | <b><u>376</u></b> | <b><u>194</u></b>  | 8      | 377               | 194                | 375               | 194               | <b><u>375</u></b> | <b><u>194</u></b>  |
| 445.gobmk      | 8      | 769                | 109               | 764               | 110                | <b><u>766</u></b> | <b><u>110</u></b>  | 8      | 719               | 117                | <b><u>719</u></b> | <b><u>117</u></b> | 718               | 117                |
| 456.hammer     | 8      | 407                | 184               | <b><u>404</u></b> | <b><u>185</u></b>  | 404               | 185                | 8      | 345               | 217                | 345               | 216               | <b><u>345</u></b> | <b><u>216</u></b>  |
| 458.sjeng      | 8      | 874                | 111               | <b><u>875</u></b> | <b><u>111</u></b>  | 875               | 111                | 8      | 800               | 121                | 800               | 121               | <b><u>800</u></b> | <b><u>121</u></b>  |
| 462.libquantum | 8      | 385                | 430               | 371               | 447                | <b><u>377</u></b> | <b><u>440</u></b>  | 8      | 350               | 473                | <b><u>353</u></b> | <b><u>470</u></b> | 359               | 462                |
| 464.h264ref    | 8      | <b><u>1022</u></b> | <b><u>173</u></b> | 1021              | 173                | 1023              | 173                | 8      | 975               | 182                | <b><u>974</u></b> | <b><u>182</u></b> | 974               | 182                |
| 471.omnetpp    | 8      | 480                | 104               | 481               | 104                | <b><u>480</u></b> | <b><u>104</u></b>  | 8      | <b><u>440</u></b> | <b><u>114</u></b>  | 440               | 114               | 441               | 113                |
| 473.astar      | 8      | 755                | 74.4              | <b><u>755</u></b> | <b><u>74.4</u></b> | 754               | 74.5               | 8      | <b><u>656</u></b> | <b><u>85.6</u></b> | 655               | 85.7              | 657               | 85.5               |
| 483.xalancbmk  | 8      | <b><u>367</u></b>  | <b><u>150</u></b> | 367               | 150                | 367               | 151                | 8      | <b><u>367</u></b> | <b><u>150</u></b>  | 367               | 150               | 367               | 151                |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

## General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

The Acer AW2000h-AW170h F1, Gateway GW2000h-GW170h F1, Acer AW2000ht-AW170ht F1 and Gateway GW2000ht-GW170ht F1 are electronically equivalent.  
This result was measured on GW2000ht-GW170ht F1.

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

Acer AW2000h-AW170h F1 (Intel Xeon L5609, 1.86 GHz)

**SPECint\_rate2006 = 146**

**SPECint\_rate\_base2006 = 135**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** Jul-2010

**Hardware Availability:** Aug-2010

**Software Availability:** Jan-2010

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libicl1.1-32bit -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Acer AW2000h-AW170h F1 (Intel Xeon L5609, 1.86 GHz)

SPECint\_rate2006 = 146

SPECint\_rate\_base2006 = 135

CPU2006 license: 97  
Test sponsor: Acer Incorporated  
Tested by: Acer Incorporated

Test date: Jul-2010  
Hardware Availability: Aug-2010  
Software Availability: Jan-2010

## Peak Portability Flags (Continued)

456.hmmcr: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -ansi-alias  
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32  
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static  
429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
-ipo -no-prec-div -ansi-alias  
456.hmmcr: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32  
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll4 -auto-ilp32  
462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-prefetch  
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap  
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

Acer AW2000h-AW170h F1 (Intel Xeon L5609, 1.86 GHz)

**SPECint\_rate2006 = 146**

**SPECint\_rate\_base2006 = 135**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** Jul-2010

**Hardware Availability:** Aug-2010

**Software Availability:** Jan-2010

## Peak Optimization Flags (Continued)

473.astar (continued):

`-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64`

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revG.20101027.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revG.20101027.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 15:00:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 3 December 2010.