



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp[®]_rate2006 = 136

PRIMERGY TX300 S6, Intel Xeon X5675, 3.07 GHz

SPECfp_rate_base2006 = 133

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Dec-2010

Hardware Availability: Feb-2011

Software Availability: Nov-2010

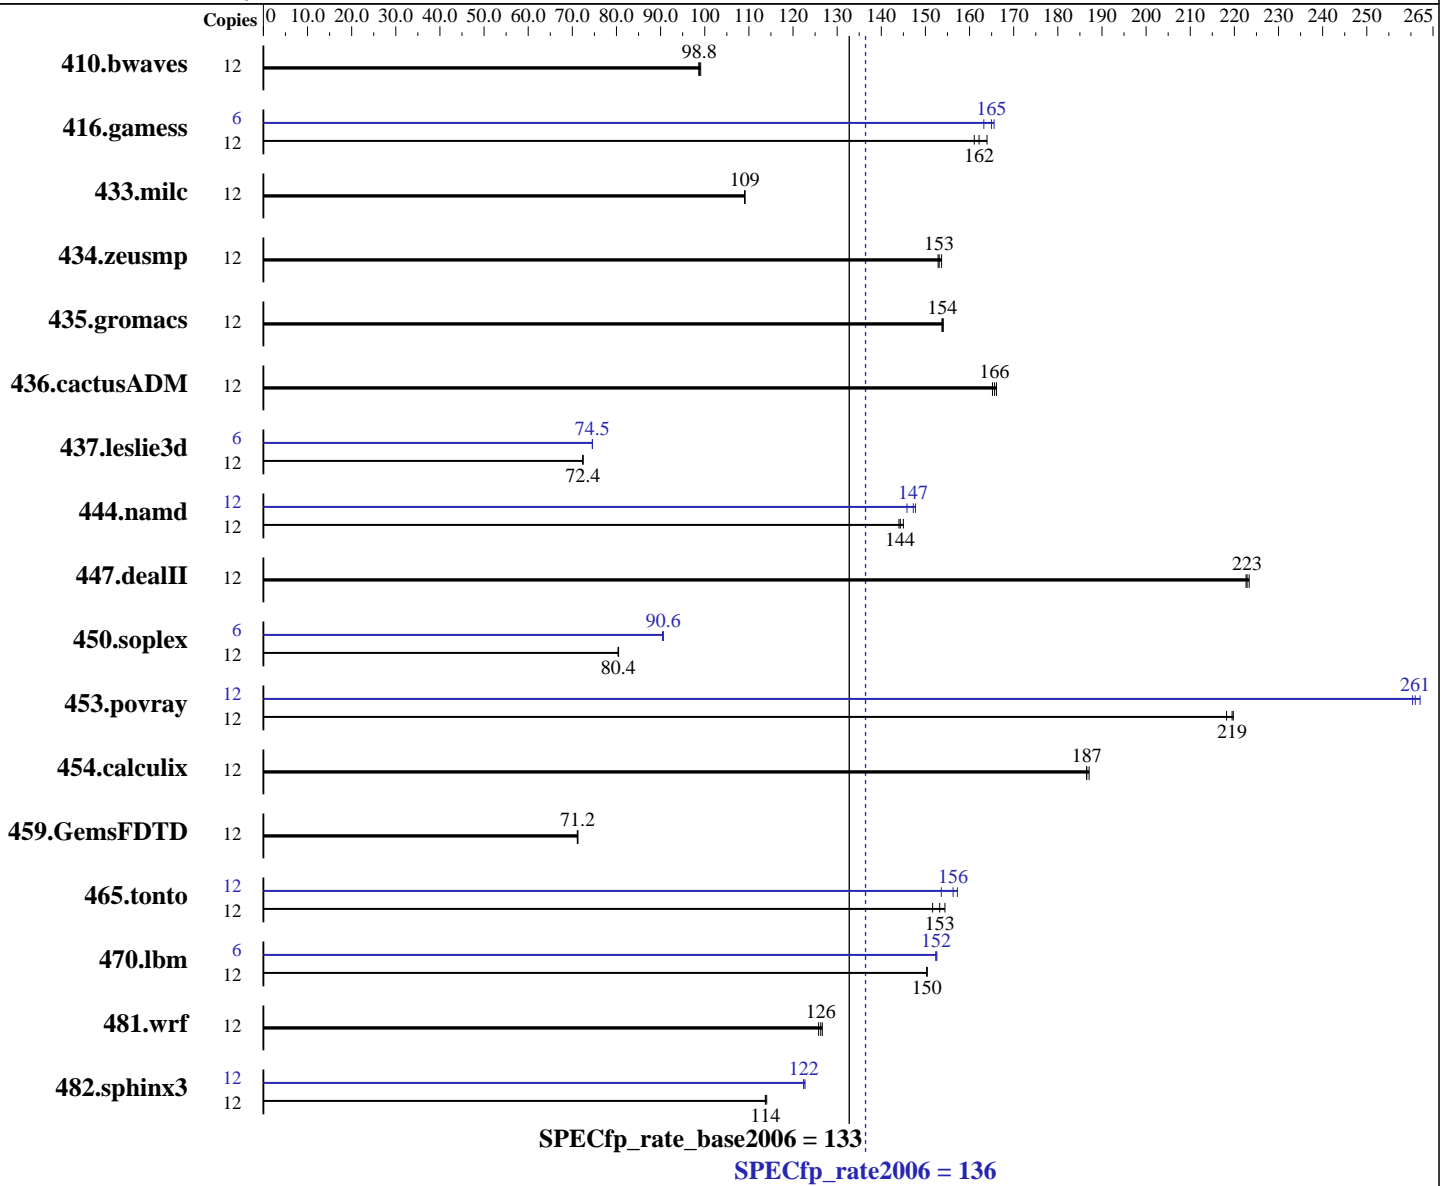

Hardware

CPU Name: Intel Xeon X5675
 CPU Characteristics: Intel Turbo Boost Technology up to 3.47 GHz
 CPU MHz: 3067
 FPU: Integrated
 CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) with SP1, Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64, Version 12.0.0.082 Build 20101006
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 136

PRIMERGY TX300 S6, Intel Xeon X5675, 3.07 GHz

SPECfp_rate_base2006 = 133

CPU2006 license: 19

Test date: Dec-2010

Test sponsor: Fujitsu

Hardware Availability: Feb-2011

Tested by: Fujitsu

Software Availability: Nov-2010

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 24 GB (6 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x SAS, 300 GB, 10000 RPM
Other Hardware: --

Peak Pointers: 32/64-bit
Other Software: none

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	1646	99.1	<u>1651</u>	<u>98.8</u>	1653	98.6	12	1646	99.1	<u>1651</u>	<u>98.8</u>	1653	98.6
416.gamess	12	1433	164	<u>1449</u>	<u>162</u>	1459	161	6	720	163	710	166	<u>712</u>	<u>165</u>
433.milc	12	<u>1010</u>	<u>109</u>	1010	109	1010	109	12	<u>1010</u>	<u>109</u>	1010	109	1010	109
434.zeusmp	12	711	154	<u>713</u>	<u>153</u>	714	153	12	711	154	<u>713</u>	<u>153</u>	714	153
435.gromacs	12	556	154	<u>557</u>	<u>154</u>	557	154	12	556	154	<u>557</u>	<u>154</u>	557	154
436.cactusADM	12	<u>866</u>	<u>166</u>	868	165	863	166	12	<u>866</u>	<u>166</u>	868	165	863	166
437.leslie3d	12	<u>1558</u>	<u>72.4</u>	1559	72.3	1557	72.4	6	756	74.6	757	74.5	<u>757</u>	<u>74.5</u>
444.namd	12	664	145	<u>667</u>	<u>144</u>	668	144	12	660	146	<u>654</u>	<u>147</u>	651	148
447.dealII	12	615	223	617	223	<u>616</u>	<u>223</u>	12	615	223	617	223	<u>616</u>	<u>223</u>
450.soplex	12	1244	80.5	1245	80.4	<u>1245</u>	<u>80.4</u>	6	<u>552</u>	<u>90.6</u>	553	90.4	552	90.6
453.povray	12	<u>291</u>	<u>219</u>	293	218	291	220	12	245	260	244	262	<u>245</u>	<u>261</u>
454.calculix	12	529	187	<u>531</u>	<u>187</u>	531	187	12	529	187	<u>531</u>	<u>187</u>	531	187
459.GemsFDTD	12	1790	71.1	<u>1787</u>	<u>71.2</u>	1787	71.2	12	1790	71.1	<u>1787</u>	<u>71.2</u>	1787	71.2
465.tonto	12	779	152	<u>771</u>	<u>153</u>	765	154	12	<u>756</u>	<u>156</u>	751	157	769	154
470.lbm	12	1096	150	<u>1097</u>	<u>150</u>	1097	150	6	540	153	<u>541</u>	<u>152</u>	541	152
481.wrf	12	1058	127	1066	126	<u>1061</u>	<u>126</u>	12	1058	127	1066	126	<u>1061</u>	<u>126</u>
482.sphinx3	12	2051	114	2057	114	<u>2056</u>	<u>114</u>	12	1906	123	1911	122	<u>1910</u>	<u>122</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
Hugepages were not configured on the system

Platform Notes

BIOS configuration:
Data Reuse Optimization = Disable



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 136

PRIMERGY TX300 S6, Intel Xeon X5675, 3.07 GHz

SPECfp_rate_base2006 = 133

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Dec-2010
Hardware Availability: Feb-2011
Software Availability: Nov-2010

General Notes

This result was measured on the PRIMERGY TX300 S6. The PRIMERGY TX300 S6 and the PRIMERGY RX300 S6 are electronically equivalent.

For information about Fujitsu please visit: <http://www.fujitsu.com>
Binaries were compiled on SLES 10 SP1 with Binutils 2.18.50.0.7.20080502

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.lelie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deall: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 136

PRIMERGY TX300 S6, Intel Xeon X5675, 3.07 GHz

SPECfp_rate_base2006 = 133

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Dec-2010
Hardware Availability: Feb-2011
Software Availability: Nov-2010

Base Optimization Flags (Continued)

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -ansi-alias
Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div
Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -ansi-alias

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64
482.sphinx3: icc -m32
C++ benchmarks (except as noted below):
icpc -m64
450.soplex: icpc -m32
Fortran benchmarks:
ifort -m64
Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deall: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 136

PRIMERGY TX300 S6, Intel Xeon X5675, 3.07 GHz

SPECfp_rate_base2006 = 133

CPU2006 license: 19

Test date: Dec-2010

Test sponsor: Fujitsu

Hardware Availability: Feb-2011

Tested by: Fujitsu

Software Availability: Nov-2010

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-ansi-alias -opt-prefetch -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 136

PRIMERGY TX300 S6, Intel Xeon X5675, 3.07 GHz

SPECfp_rate_base2006 = 133

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Dec-2010

Hardware Availability: Feb-2011

Software Availability: Nov-2010

Peak Optimization Flags (Continued)

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.20110222.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.20110222.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 16:16:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 March 2011.