



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®2006 = 20.0

ProLiant DL380 G7
(1.60 GHz, Intel Xeon E5603)

SPECint_base2006 = 19.1

CPU2006 license: 3


Test date: Feb-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2011

Tested by: Hewlett-Packard Company

Software Availability: Dec-2010

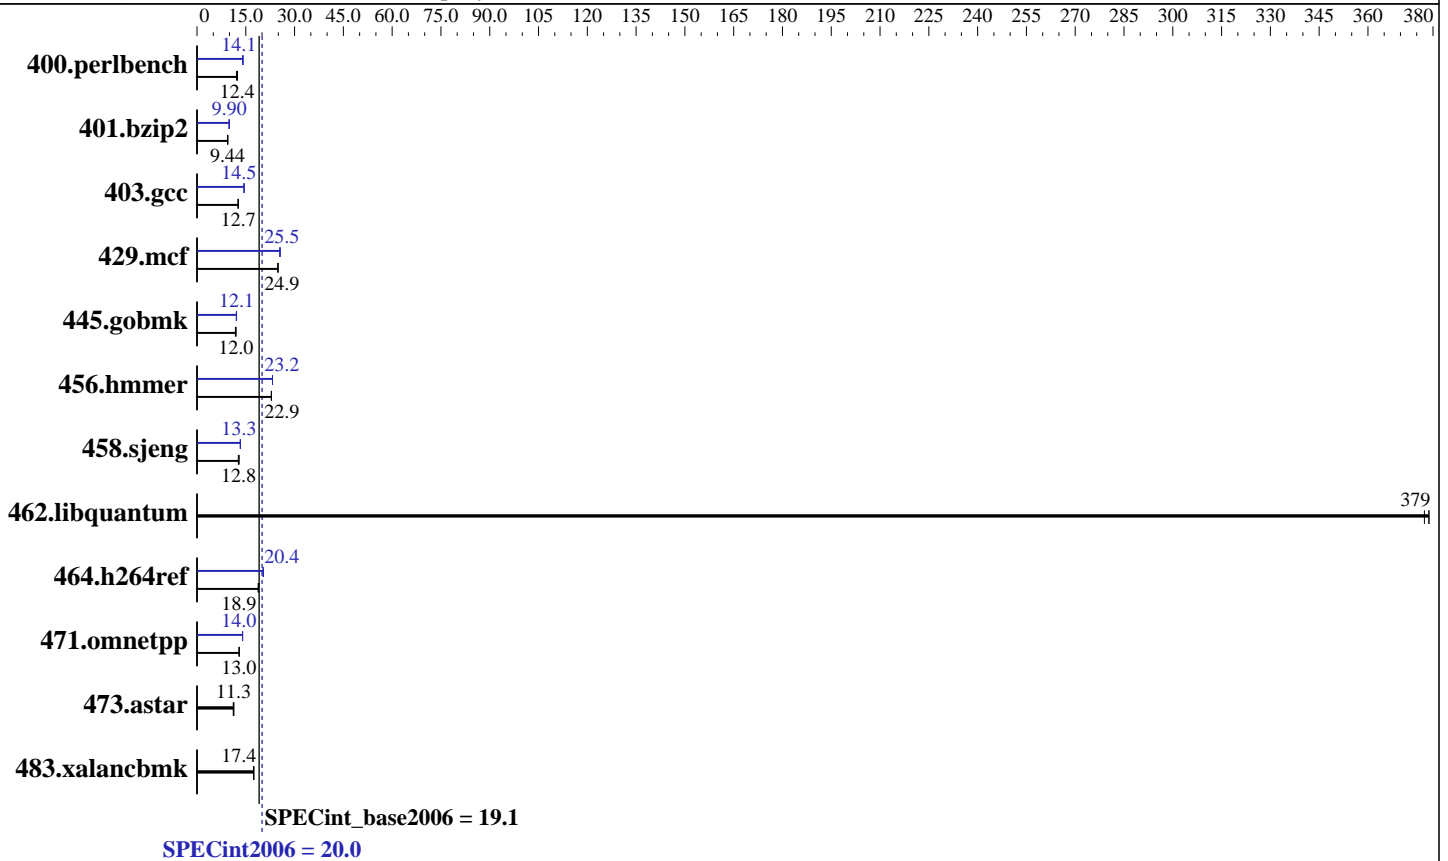

Hardware

CPU Name: Intel Xeon E5603
 CPU Characteristics: 1600
 CPU MHz: 1600
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 4 MB I+D on chip per chip
 Other Cache: None
 Memory: 96 GB (12 x 8 GB 2Rx4 PC3-10600R-9, ECC, running at 1067 MHz)
 Disk Subsystem: 1 x 300 GB 10 K SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) SP1, Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL380 G7
(1.60 GHz, Intel Xeon E5603)

SPECint2006 = **20.0**

SPECint_base2006 = **19.1**

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Feb-2011

Hardware Availability: Feb-2011

Software Availability: Dec-2010

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	804	12.2	787	12.4	787	12.4	691	14.1	690	14.2	698	14.0
401.bzip2	1022	9.44	1022	9.44	1022	9.44	975	9.89	975	9.90	975	9.90
403.gcc	635	12.7	636	12.7	636	12.7	556	14.5	556	14.5	557	14.5
429.mcf	366	24.9	366	24.9	366	24.9	356	25.6	358	25.5	358	25.5
445.gobmk	877	12.0	875	12.0	889	11.8	868	12.1	863	12.2	864	12.1
456.hammer	408	22.9	408	22.9	408	22.9	402	23.2	402	23.2	402	23.2
458.sjeng	935	12.9	943	12.8	952	12.7	908	13.3	907	13.3	908	13.3
462.libquantum	54.7	379	54.7	379	54.9	377	54.7	379	54.7	379	54.9	377
464.h264ref	1168	18.9	1178	18.8	1168	18.9	1085	20.4	1086	20.4	1087	20.4
471.omnetpp	482	13.0	482	13.0	483	13.0	447	14.0	445	14.0	446	14.0
473.astar	620	11.3	623	11.3	630	11.1	620	11.3	623	11.3	630	11.1
483.xalancbmk	396	17.4	394	17.5	396	17.4	396	17.4	394	17.5	396	17.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'nodev /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

BIOS configuration:
 HP Power Profile set to Maximum Performance
 Thermal Configuration set to Increased Cooling
 Data Reuse set to Disabled

General Notes

Binaries were compiled on RHEL5.5

Base Compiler Invocation

C benchmarks:
 icc -m64

C++ benchmarks:
 icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 20.0

ProLiant DL380 G7
(1.60 GHz, Intel Xeon E5603)

SPECint_base2006 = 19.1

CPU2006 license: 3

Test date: Feb-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2011

Tested by: Hewlett-Packard Company

Software Availability: Dec-2010

Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

Base Optimization Flags

C benchmarks:

```

-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

```

C++ benchmarks:

```

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap64
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

```

Base Other Flags

C benchmarks:

```

403.gcc: -Dalloca=_alloca

```

Peak Compiler Invocation

C benchmarks (except as noted below):

```

icc -m64

400.perlbench: icc -m32

429.mcf: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 20.0

ProLiant DL380 G7
(1.60 GHz, Intel Xeon E5603)

SPECint_base2006 = 19.1

CPU2006 license: 3

Test date: Feb-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2011

Tested by: Hewlett-Packard Company

Software Availability: Dec-2010

Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):

icpc -m64

471.omnetpp: icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

456.hmmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
-opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

456.hmmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 20.0

ProLiant DL380 G7
(1.60 GHz, Intel Xeon E5603)

SPECint_base2006 = 19.1

CPU2006 license: 3

Test date: Feb-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2011

Tested by: Hewlett-Packard Company

Software Availability: Dec-2010

Peak Optimization Flags (Continued)

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs
-L/smartheap -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20110316.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20110316.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL380 G7
(1.60 GHz, Intel Xeon E5603)

SPECint2006 = 20.0

SPECint_base2006 = 19.1

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Feb-2011

Hardware Availability: Feb-2011

Software Availability: Dec-2010

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 16:45:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 March 2011.