



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

### SPECfp®\_rate2006 = 499

### Gateway GR585 F1 (AMD Opteron 6134)

### SPECfp\_rate\_base2006 = 450

CPU2006 license: 97


Test date: Mar-2011

Test sponsor: Acer Incorporated

Hardware Availability: Jul-2010

Tested by: Acer Incorporated

Software Availability: Jul-2010

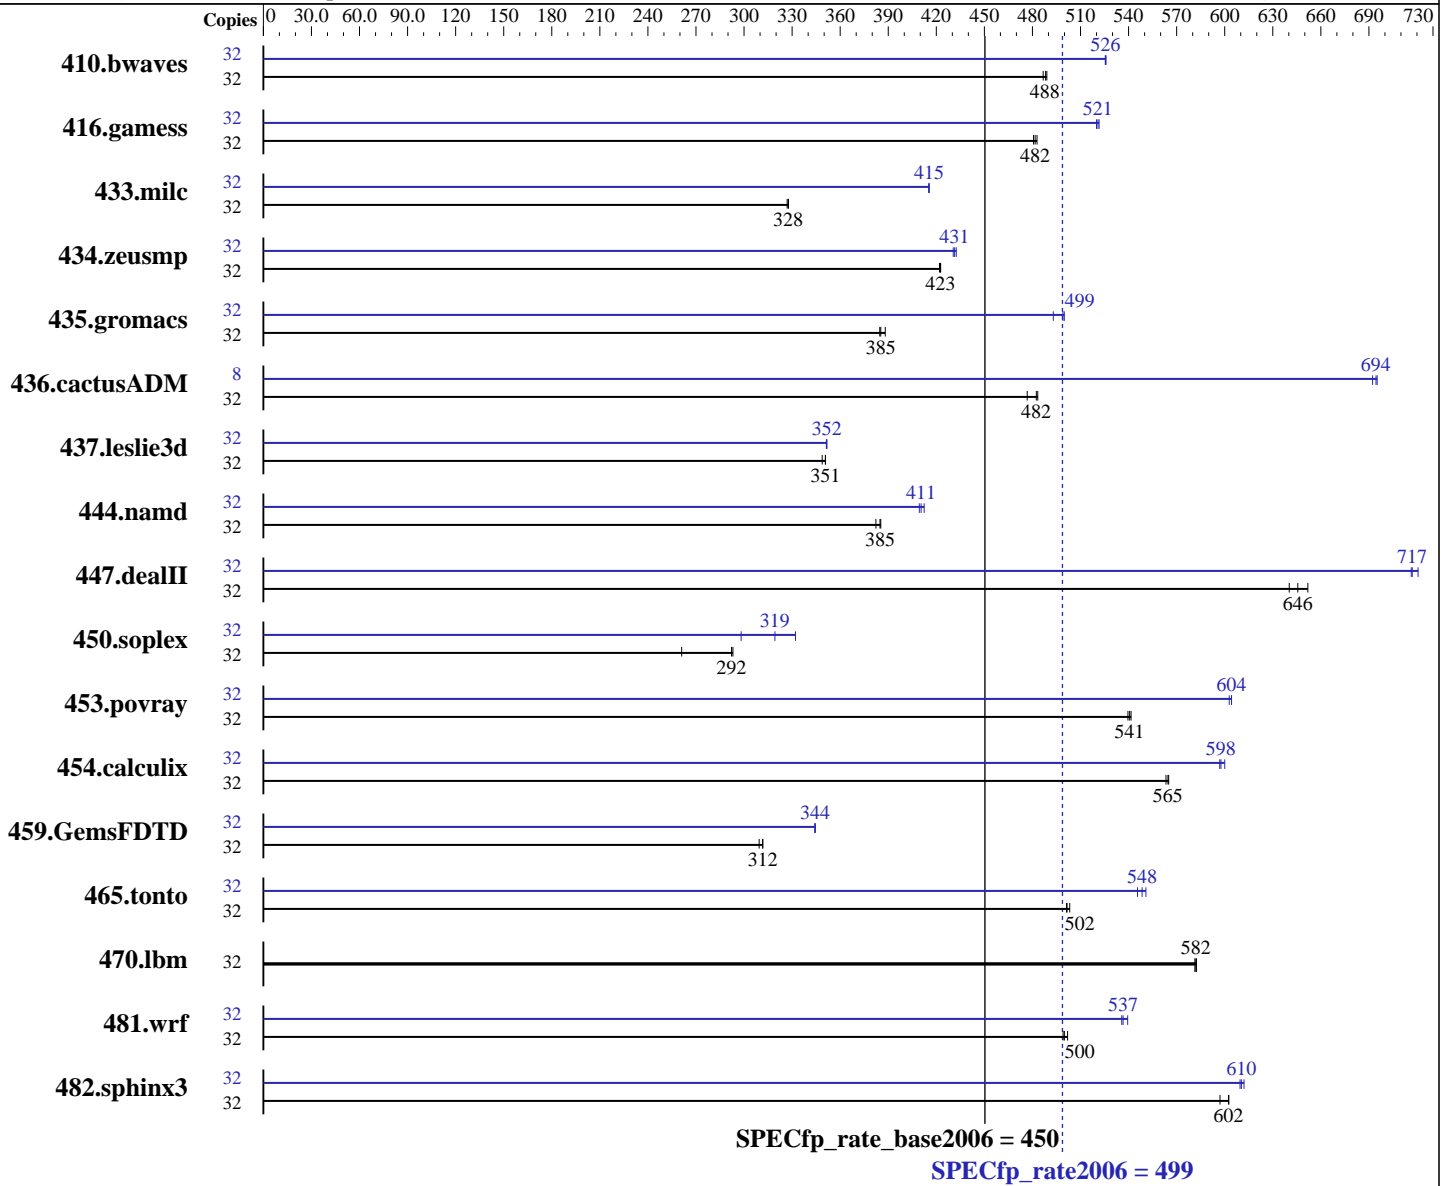

#### Hardware

CPU Name: AMD Opteron 6134  
 CPU Characteristics:  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

#### Software

Operating System: SUSE Linux Enterprise Server 11 SP1  
 Kernel 2.6.32.12-0.7-default  
 Compiler: x86 Open64 4.2.4 Compiler Suite (from AMD)  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multiuser)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp\_rate2006 = 499

Gateway GR585 F1 (AMD Opteron 6134)

SPECfp\_rate\_base2006 = 450

CPU2006 license: 97

Test date: Mar-2011

Test sponsor: Acer Incorporated

Hardware Availability: Jul-2010

Tested by: Acer Incorporated

Software Availability: Jul-2010

L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 4 cores  
Other Cache: None  
Memory: 128 GB (32 x 4 GB 2Rx8 PC3-10600R-9, ECC)  
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	894	487	<b>891</b>	<b>488</b>	889	489	32	828	525	<b>827</b>	<b>526</b>	827	526
416.gamess	32	<b>1301</b>	<b>482</b>	1298	483	1303	481	32	1205	520	1201	522	<b>1203</b>	<b>521</b>
433.milc	32	899	327	896	328	<b>897</b>	<b>328</b>	32	<b>707</b>	<b>415</b>	707	416	707	415
434.zeusmp	32	690	422	<b>689</b>	<b>423</b>	689	423	32	<b>675</b>	<b>431</b>	676	431	673	432
435.gromacs	32	<b>593</b>	<b>385</b>	594	385	589	388	32	463	493	<b>458</b>	<b>499</b>	457	500
436.cactusADM	32	<b>793</b>	<b>482</b>	802	477	791	483	8	138	692	<b>138</b>	<b>694</b>	138	695
437.leslie3d	32	862	349	857	351	<b>858</b>	<b>351</b>	32	856	351	855	352	<b>855</b>	<b>352</b>
444.namd	32	671	382	666	385	<b>667</b>	<b>385</b>	32	<b>625</b>	<b>411</b>	627	409	622	412
447.dealII	32	<b>567</b>	<b>646</b>	562	652	572	640	32	<b>511</b>	<b>717</b>	511	716	508	721
450.soplex	32	1022	261	<b>913</b>	<b>292</b>	911	293	32	895	298	<b>836</b>	<b>319</b>	804	332
453.povray	32	315	540	<b>315</b>	<b>541</b>	314	542	32	282	604	282	603	<b>282</b>	<b>604</b>
454.calculix	32	467	565	469	563	<b>468</b>	<b>565</b>	32	442	597	<b>442</b>	<b>598</b>	440	600
459.GemsFDTD	32	<b>1089</b>	<b>312</b>	1089	312	1097	309	32	986	344	986	344	<b>986</b>	<b>344</b>
465.tonto	32	<b>628</b>	<b>502</b>	626	503	628	501	32	<b>574</b>	<b>548</b>	572	551	577	546
470.lbm	32	<b>755</b>	<b>582</b>	755	582	756	581	32	<b>755</b>	<b>582</b>	755	582	756	581
481.wrf	32	716	499	<b>715</b>	<b>500</b>	712	502	32	667	536	<b>666</b>	<b>537</b>	663	539
482.sphinx3	32	1045	597	<b>1035</b>	<b>602</b>	1035	603	32	<b>1022</b>	<b>610</b>	1019	612	1023	610

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit  
  
Set vm/nr\_hugepages=28672 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp\_rate2006 = 499

Gateway GR585 F1 (AMD Opteron 6134)

SPECfp\_rate\_base2006 = 450

CPU2006 license: 97

Test date: Mar-2011

Test sponsor: Acer Incorporated

Hardware Availability: Jul-2010

Tested by: Acer Incorporated

Software Availability: Jul-2010

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "896"

LD\_LIBRARY\_PATH = "/usr/cpu2006/amd1002-rate-libs-revC/64:/usr/cpu2006/amd1002-rate-libs-revC/32"

OMP\_NUM\_THREADS = "4"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at

<http://developer.amd.com/cpu/open64>

Binaries were compiled on SLES10 SP2 with binutils 2.18

This result was measured on the Gateway GR585 F1.

The Acer AR585 F1 and Gateway GR585 F1 are electronically equivalent.

## Base Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64  
 436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.deallI: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG  
 -fno-second-underscore  
 482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp\_rate2006 = 499

Gateway GR585 F1 (AMD Opteron 6134)

SPECfp\_rate\_base2006 = 450

CPU2006 license: 97

Test date: Mar-2011

Test sponsor: Acer Incorporated

Hardware Availability: Jul-2010

Tested by: Acer Incorporated

Software Availability: Jul-2010

## Base Optimization Flags

C benchmarks:

-march=barcelona -mso -Ofast -OPT:malloc\_alg=1 -HP:bdt=2m

C++ benchmarks:

-march=barcelona -mso -Ofast -static -INLINE:aggressive=on  
-OPT:malloc\_alg=1 -HP:bdt=2m

Fortran benchmarks:

-march=barcelona -mso -Ofast -HP

Benchmarks using both Fortran and C:

-march=barcelona -mso -Ofast -OPT:malloc\_alg=1 -HP:bdt=2m -HP

## Peak Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG  
-fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp\_rate2006 = 499

Gateway GR585 F1 (AMD Opteron 6134)

SPECfp\_rate\_base2006 = 450

CPU2006 license: 97

Test date: Mar-2011

Test sponsor: Acer Incorporated

Hardware Availability: Jul-2010

Tested by: Acer Incorporated

Software Availability: Jul-2010

## Peak Optimization Flags

### C benchmarks:

433.milc: -march=barcelona -mso -Ofast -CG:movnti=1  
-CG:local\_sched\_alg=1 -CG:locs\_shallow\_depth=1  
-HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: basepeak = yes

482.sphinx3: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:malloc\_alg=2  
-CG:sse\_cse\_regs=0 -CG:locs\_shallow\_depth=1 -CG:cmp\_peep=on  
-CG:local\_sched\_alg=1 -INLINE:aggressive=on

### C++ benchmarks:

444.namd: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:ignore\_feedback=off  
-CG:local\_sched\_alg=2 -CG:load\_exe=0 -CG:compute\_to=on  
-OPT:unroll\_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.deallI: -march=barcelona -mso -Ofast -static -INLINE:aggressive=on  
-LNO:opt=0 -fno-emit-exceptions -m32  
-OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
-OPT:unroll\_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on  
-CG:cmp\_peep=on -TENV:frame\_pointer=off

450.soplex: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -INLINE:aggressive=on  
-OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
-OPT:fold\_unsigned\_relops=on -OPT:malloc\_alg=1  
-CG:load\_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

### Fortran benchmarks:

410.bwaves: -march=barcelona -mso -O3 -OPT:Ofast -OPT:treeheight=on  
-LNO:blocking=off -LNO:prefetch\_ahead=5  
-LNO:ignore\_feedback=off -WOPT:aggstr=0 -HP:bdt=2m:heap=2m  
-CG:cmp\_peep=on

416.gamess: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0  
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256  
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -mso -Ofast -LNO:blocking=off  
-LNO:interchange=off -OPT:treeheight=on -OPT:unroll\_size=256  
-CG:cmp\_peep=on -GRA:prioritize\_by\_density=on -HP

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECfp\_rate2006 = 499**

**Gateway GR585 F1 (AMD Opteron 6134)**

**SPECfp\_rate\_base2006 = 450**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** Mar-2011

**Hardware Availability:** Jul-2010

**Software Availability:** Jul-2010

## Peak Optimization Flags (Continued)

437.leslie3d: -march=barcelona -mso -Ofast -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -mso -Ofast -LNO:fission=2  
-LNO:prefetch\_ahead=1 -CG:load\_exe=0 -CG:local\_sched\_alg=1  
-HP

465.tonto: -march=barcelona -mso -Ofast  
-OPT:alias=no\_f90\_pointer\_alias -LNO:blocking=off  
-CG:load\_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -mso -Ofast -OPT:rsqrt=2  
-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -apo -LNO:prefetch\_ahead=1  
-HP:bdt=2m:heap=2m -LANG:heap\_allocation\_threshold=100

454.calculix: -march=barcelona -mso -Ofast -CG:load\_exe=0  
-CG:ptr\_load\_use=0 -CG:local\_sched\_alg=2 -CG:compute\_to=on  
-LNO:prefetch\_ahead=30 -WOPT:unroll=2  
-GRA:optimize\_boundary=on -HP:bdt=2m:heap=2m

481.wrf: -march=barcelona -mso -Ofast -LNO:blocking=off  
-LNO:prefetch\_ahead=10 -LANG:copyinout=off  
-IPA:callee\_limit=5000 -GRA:prioritize\_by\_density=on -m3dnow  
-HP

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html>  
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml>  
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 21:17:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 April 2011.