



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint®_rate2006 = 735

NovaScale R480 F2 (Intel Xeon E7-4820, 2.00 GHz)

SPECint_rate_base2006 = 684

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Mar-2011

Hardware Availability: Apr-2011

Software Availability: Apr-2011

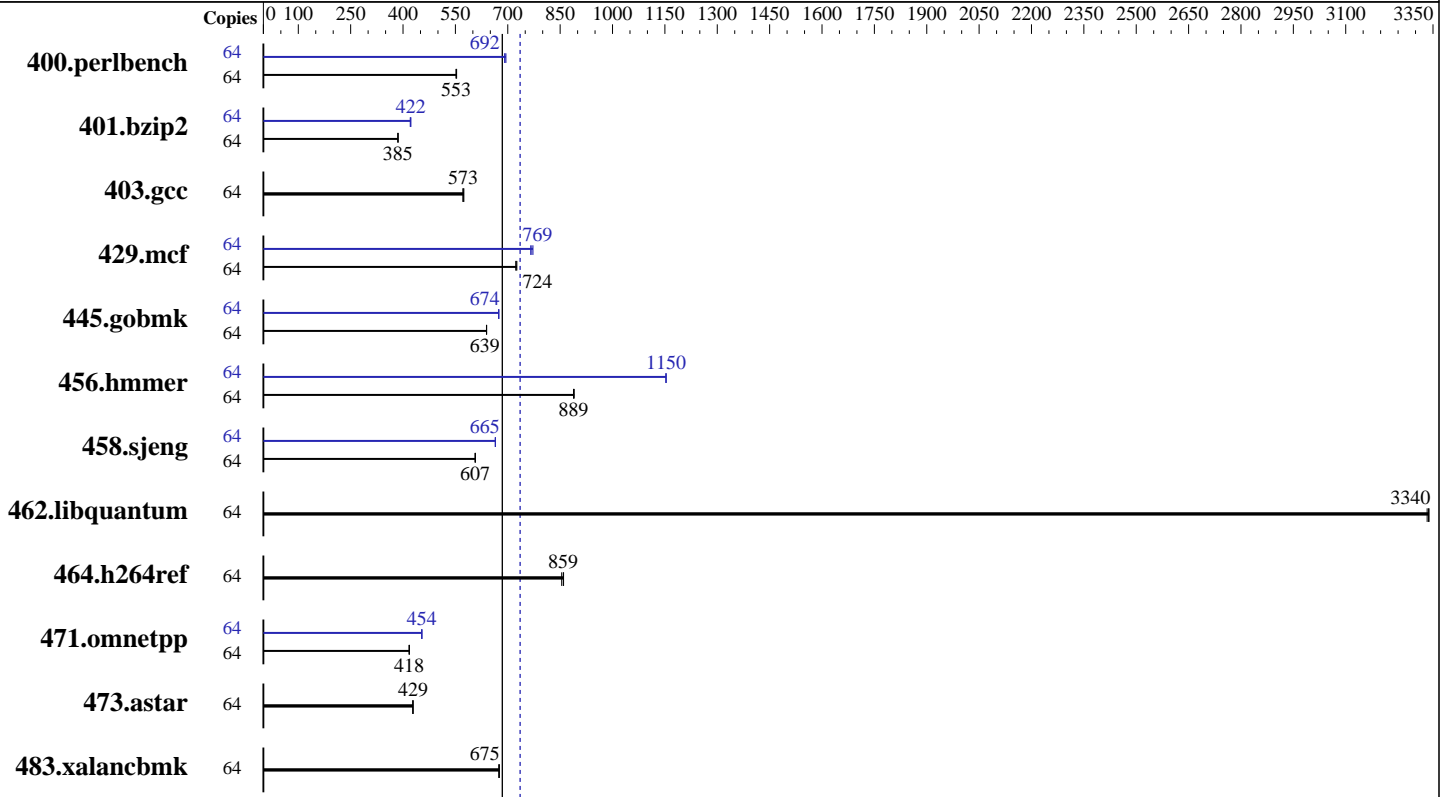

SPECint_rate2006 = 735

SPECint_rate_base2006 = 684

Hardware

CPU Name: Intel Xeon E7-4820
 CPU Characteristics: Intel Turbo Boost Technology up to 2.27 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 18 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (64 x 8 GB 4Rx8 PC3-8500R-7, ECC, running at 978 MHz)
 Disk Subsystem: 1 x 500 GB 7200 RPM SAS 6Gb
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 735

NovaScale R480 F2 (Intel Xeon E7-4820, 2.00 GHz)

SPECint_rate_base2006 = 684

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Mar-2011
Hardware Availability: Apr-2011
Software Availability: Apr-2011

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	1130	553	1132	553	1133	552	64	904	692	900	695	905	691
401.bzip2	64	1602	385	1601	386	1603	385	64	1468	421	1463	422	1463	422
403.gcc	64	901	572	897	574	900	573	64	901	572	897	574	900	573
429.mcf	64	804	726	807	724	807	723	64	756	772	759	769	762	766
445.gobmk	64	1050	639	1050	639	1051	639	64	996	674	996	674	996	674
456.hammer	64	671	890	672	888	672	889	64	518	1150	518	1150	518	1150
458.sjeng	64	1276	607	1277	606	1275	607	64	1165	665	1165	665	1166	664
462.libquantum	64	397	3340	398	3330	397	3340	64	397	3340	398	3330	397	3340
464.h264ref	64	1649	859	1658	854	1647	860	64	1649	859	1658	854	1647	860
471.omnetpp	64	958	417	957	418	957	418	64	882	453	881	454	881	454
473.astar	64	1050	428	1048	429	1048	429	64	1050	428	1048	429	1048	429
483.xalancbmk	64	653	676	654	675	655	674	64	653	676	654	675	655	674

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 57600 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

BIOS Settings:
Power Management = Maximum Performance (Default = Active Power Controller)

General Notes

The Dell PowerEdge R910 and the Bull NovaScale R480 F2 models are electronically equivalent. The results have been measured on a Dell PowerEdge R910 model. Binaries were compiled on RHEL5.5



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 735

NovaScale R480 F2 (Intel Xeon E7-4820, 2.00 GHz)

SPECint_rate_base2006 = 684

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Mar-2011

Hardware Availability: Apr-2011

Software Availability: Apr-2011

Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 735

NovaScale R480 F2 (Intel Xeon E7-4820, 2.00 GHz)

SPECint_rate_base2006 = 684

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Mar-2011
Hardware Availability: Apr-2011
Software Availability: Apr-2011

Peak Compiler Invocation (Continued)

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: basepeak = yes

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 735

NovaScale R480 F2 (Intel Xeon E7-4820, 2.00 GHz)

SPECint_rate_base2006 = 684

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Mar-2011
Hardware Availability: Apr-2011
Software Availability: Apr-2011

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110308.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110308.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 19:29:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 April 2011.