



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint®_rate2006 = 253

Cisco UCS C200 M2 (Intel Xeon E5640, 2.67 GHz)

SPECint_rate_base2006 = 238

CPU2006 license: 9019


Test date: Mar-2011

Test sponsor: Cisco Systems

Hardware Availability: Mar-2011

Tested by: Cisco Systems

Software Availability: Jan-2011

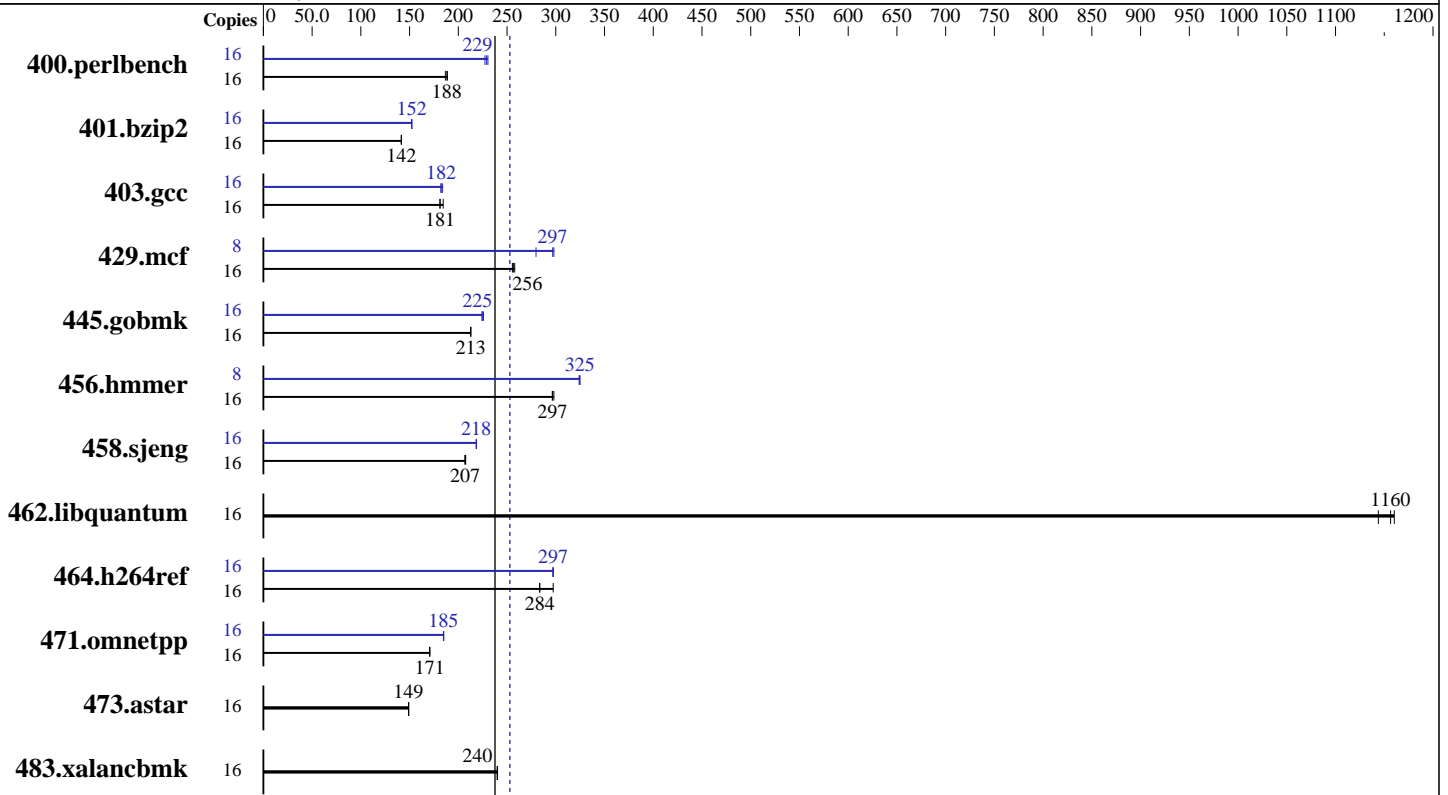

SPECint_rate2006 = 253

SPECint_rate_base2006 = 238

Hardware

CPU Name: Intel Xeon E5640
 CPU Characteristics: Intel Turbo Boost Technology up to 2.93 GHz
 CPU MHz: 2667
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3L-10600R-9, ECC)
 Disk Subsystem: 73 GB SAS, 15K RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) with SP1, Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ Compiler XE for applications running on IA-32, Version 12.0.1.116 Build 20101116
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01, Binaries compiled on RHEL5.5 with binutils-2.17.50.0.6-14.el5



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint_rate2006 = 253

Cisco UCS C200 M2 (Intel Xeon E5640, 2.67 GHz)

SPECint_rate_base2006 = 238

CPU2006 license: 9019

Test date: Mar-2011

Test sponsor: Cisco Systems

Hardware Availability: Mar-2011

Tested by: Cisco Systems

Software Availability: Jan-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	830	188	828	189	837	187	16	678	230	688	227	683	229
401.bzip2	16	1090	142	1091	141	1090	142	16	1016	152	1014	152	1013	152
403.gcc	16	698	184	711	181	710	181	16	707	182	700	184	706	182
429.mcf	16	571	255	566	258	569	256	8	261	280	246	297	245	298
445.gobmk	16	789	213	789	213	789	213	16	747	225	743	226	748	224
456.hammer	16	501	298	503	297	504	296	8	230	325	230	324	230	325
458.sjeng	16	933	208	935	207	936	207	16	886	219	887	218	886	218
462.libquantum	16	286	1160	287	1160	290	1140	16	286	1160	287	1160	290	1140
464.h264ref	16	1191	297	1249	283	1249	284	16	1191	297	1192	297	1190	297
471.omnetpp	16	586	171	586	171	586	171	16	541	185	541	185	540	185
473.astar	16	754	149	753	149	754	149	16	754	149	753	149	754	149
483.xalancbmk	16	460	240	460	240	460	240	16	460	240	460	240	460	240

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

ulimit -s unlimited was used to set the stacksize to unlimited prior to run
Large pages were not enabled for this run

Platform Notes

BIOS Configuration : Data Reuse Optimization = Disabled

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint_rate2006 = 253

Cisco UCS C200 M2 (Intel Xeon E5640, 2.67 GHz)

SPECint_rate_base2006 = 238

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Mar-2011

Hardware Availability: Mar-2011

Software Availability: Jan-2011

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint_rate2006 = 253

Cisco UCS C200 M2 (Intel Xeon E5640, 2.67 GHz)

SPECint_rate_base2006 = 238

CPU2006 license: 9019

Test date: Mar-2011

Test sponsor: Cisco Systems

Hardware Availability: Mar-2011

Tested by: Cisco Systems

Software Availability: Jan-2011

Peak Portability Flags (Continued)

456.hmmcr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzp2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -auto-ilp32

456.hmmcr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/smartheap -lsmartheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint_rate2006 = 253

Cisco UCS C200 M2 (Intel Xeon E5640, 2.67 GHz)

SPECint_rate_base2006 = 238

CPU2006 license: 9019

Test date: Mar-2011

Test sponsor: Cisco Systems

Hardware Availability: Mar-2011

Tested by: Cisco Systems

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Cisco-BIOS-Platform-Settings.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Cisco-BIOS-Platform-Settings.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 19:16:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 April 2011.