



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint[®]2006 = 45.3

Express5800/GT110d-S (Intel Xeon E3-1220)

SPECint_base2006 = 43.0

CPU2006 license: 9006


Test date: May-2011

Test sponsor: NEC Corporation

Hardware Availability: Jun-2011

Tested by: NEC Corporation

Software Availability: Mar-2011

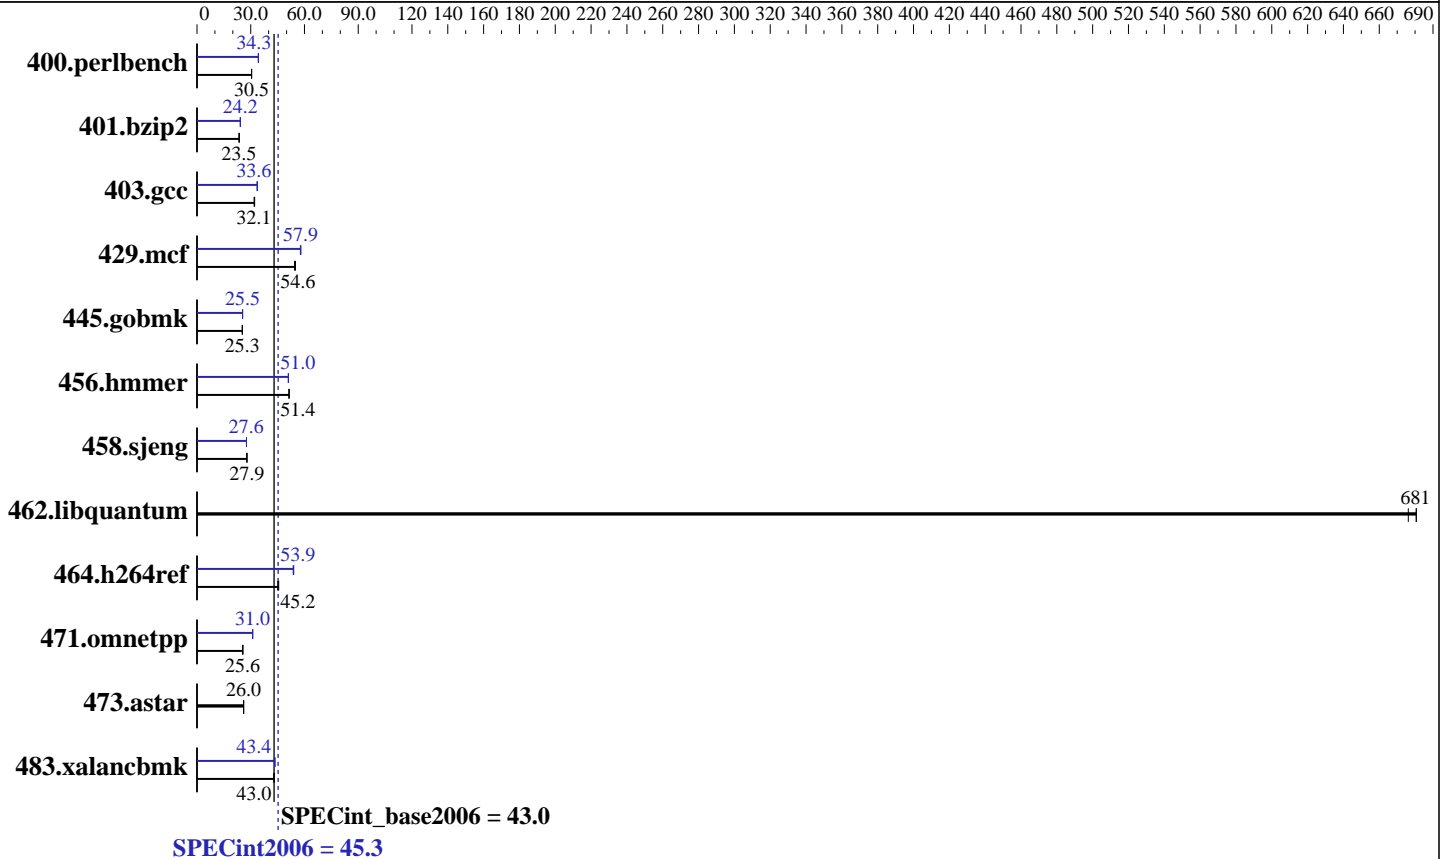

Hardware

CPU Name: Intel Xeon E3-1220
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz
 CPU MHz: 3100
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600E-9, ECC)
 Disk Subsystem: 1 x 160 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ Intel 64 Compiler XE for applications running on Intel 64, Version 12.0.3.174 Build 20110309
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = **45.3**

Express5800/GT110d-S (Intel Xeon E3-1220)

SPECint_base2006 = **43.0**

CPU2006 license: 9006

Test date: May-2011

Test sponsor: NEC Corporation

Hardware Availability: Jun-2011

Tested by: NEC Corporation

Software Availability: Mar-2011

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	321	30.4	320	30.5	<u>321</u>	<u>30.5</u>	286	34.2	<u>285</u>	<u>34.3</u>	285	34.3
401.bzip2	<u>410</u>	<u>23.5</u>	410	23.5	410	23.5	<u>399</u>	<u>24.2</u>	399	24.2	398	24.2
403.gcc	250	32.2	<u>251</u>	<u>32.1</u>	253	31.9	239	33.6	239	33.6	<u>239</u>	<u>33.6</u>
429.mcf	166	55.0	167	54.5	<u>167</u>	<u>54.6</u>	158	57.7	157	57.9	<u>157</u>	<u>57.9</u>
445.gobmk	415	25.3	414	25.3	<u>414</u>	<u>25.3</u>	413	25.4	412	25.5	<u>412</u>	<u>25.5</u>
456.hammer	182	51.4	<u>182</u>	<u>51.4</u>	181	51.4	183	51.0	183	51.0	<u>183</u>	<u>51.0</u>
458.sjeng	436	27.8	434	27.9	<u>434</u>	<u>27.9</u>	<u>438</u>	<u>27.6</u>	438	27.6	438	27.6
462.libquantum	<u>30.4</u>	<u>681</u>	30.6	676	30.4	681	<u>30.4</u>	<u>681</u>	30.6	676	30.4	681
464.h264ref	<u>490</u>	<u>45.2</u>	490	45.2	485	45.6	410	54.0	412	53.7	<u>411</u>	<u>53.9</u>
471.omnetpp	244	25.6	245	25.5	<u>245</u>	<u>25.6</u>	202	31.0	200	31.2	<u>202</u>	<u>31.0</u>
473.astar	270	26.0	<u>270</u>	<u>26.0</u>	269	26.1	270	26.0	<u>270</u>	<u>26.0</u>	269	26.1
483.xalancbmk	160	43.0	161	43.0	<u>160</u>	<u>43.0</u>	159	43.4	<u>159</u>	<u>43.4</u>	159	43.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 1800 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

Default BIOS settings were used.

General Notes

OMP_NUM_THREADS set to number of cores
 The Express5800/GT110d (Intel Xeon E3-1220) and
 the Express5800/GT110d-S (Intel Xeon E3-1220) models are electronically equivalent.
 The results have been measured on the Express5800/GT110d-S (Intel Xeon E3-1220) model.

Base Compiler Invocation

C benchmarks:
 icc -m64

C++ benchmarks:
 icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 45.3

Express5800/GT110d-S (Intel Xeon E3-1220)

SPECint_base2006 = 43.0

CPU2006 license: 9006

Test date: May-2011

Test sponsor: NEC Corporation

Hardware Availability: Jun-2011

Tested by: NEC Corporation

Software Availability: Mar-2011

Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

Base Optimization Flags

C benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

```

C++ benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib64 -lsmartheap64
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

```

Base Other Flags

C benchmarks:

```

403.gcc: -Dalloca=_alloca

```

Peak Compiler Invocation

C benchmarks (except as noted below):

```

icc -m64

400.perlbench: icc -m32

429.mcf: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 45.3

Express5800/GT110d-S (Intel Xeon E3-1220)

SPECint_base2006 = 43.0

CPU2006 license: 9006

Test date: May-2011

Test sponsor: NEC Corporation

Hardware Availability: Jun-2011

Tested by: NEC Corporation

Software Availability: Mar-2011

Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

456.hmmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch
-ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

429.mcf: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32
-ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

456.hmmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 45.3

Express5800/GT110d-S (Intel Xeon E3-1220)

SPECint_base2006 = 43.0

CPU2006 license: 9006

Test date: May-2011

Test sponsor: NEC Corporation

Hardware Availability: Jun-2011

Tested by: NEC Corporation

Software Availability: Mar-2011

Peak Optimization Flags (Continued)

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

473.astar: basepeak = yes

483.xalancbmk: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revF.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revF.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 45.3

Express5800/GT110d-S (Intel Xeon E3-1220)

SPECint_base2006 = 43.0

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2011

Hardware Availability: Jun-2011

Software Availability: Mar-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 18:33:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 June 2011.