



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

SPECint®\_rate2006 = 918

Cisco UCS B440 M2 (Intel Xeon E7-4850, 2.00 GHz)

SPECint\_rate\_base2006 = 866

CPU2006 license: 9019


Test date: Jun-2011

Test sponsor: Cisco Systems

Hardware Availability: May-2011

Tested by: Cisco Systems

Software Availability: Mar-2011

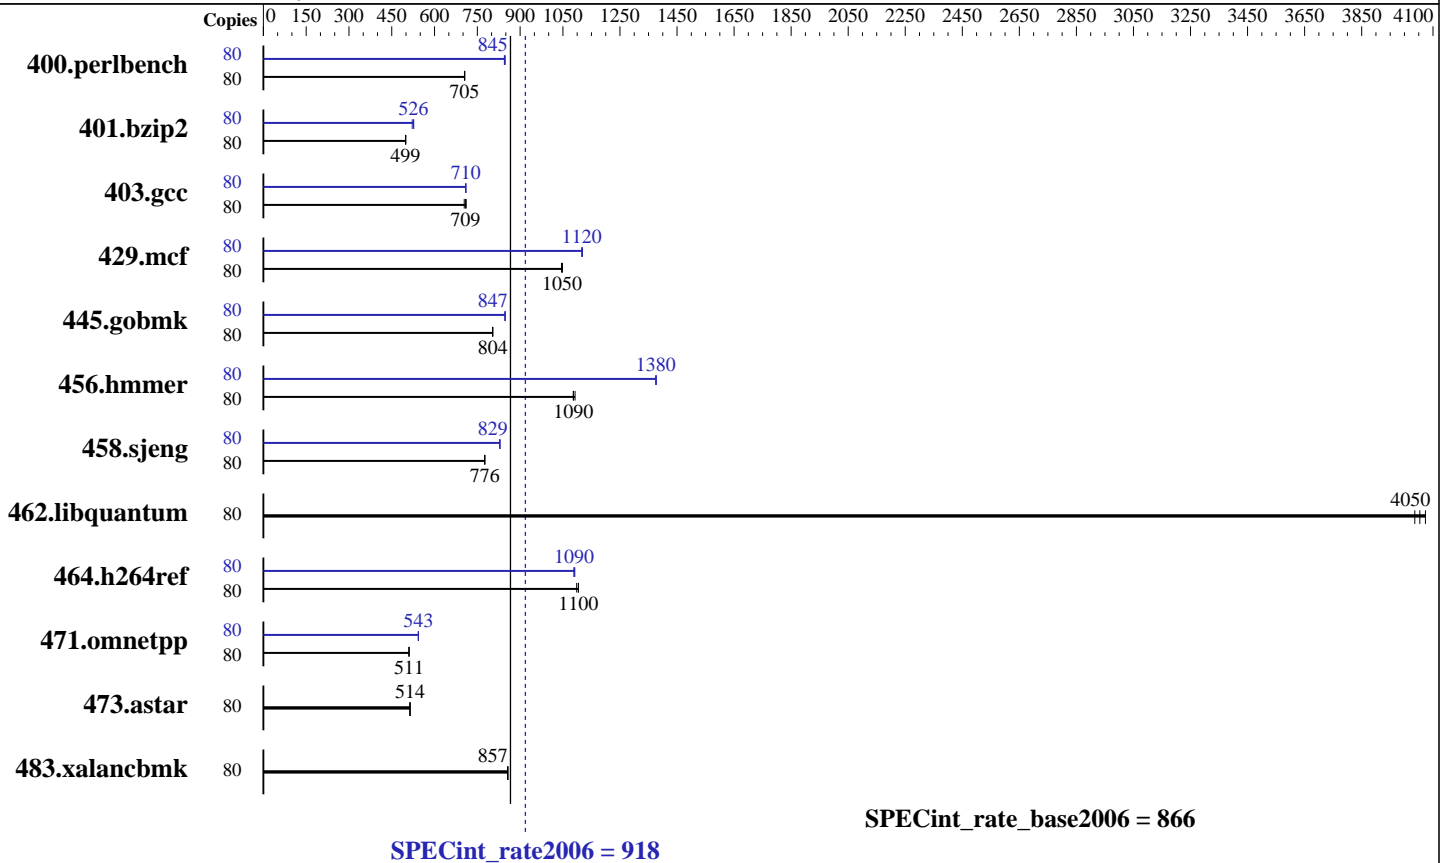

### Hardware

CPU Name: Intel Xeon E7-4850  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.4 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2,3,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 24 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 512 GB (32 x 16 GB 4Rx4 PC3-8500R-9, ECC)  
 Disk Subsystem: 146 GB SAS, 15K RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.1 Beta  
 Kernel 2.6.32-130.el6.x86\_64  
 Compiler: Intel C++ Compiler XE for applications running on IA-32  
 Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

SPECint\_rate2006 = 918

Cisco UCS B440 M2 (Intel Xeon E7-4850, 2.00 GHz)

SPECint\_rate\_base2006 = 866

CPU2006 license: 9019

Test date: Jun-2011

Test sponsor: Cisco Systems

Hardware Availability: May-2011

Tested by: Cisco Systems

Software Availability: Mar-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	80	1109	705	1107	706	<b>1108</b>	<b>705</b>	80	922	848	925	845	<b>925</b>	<b>845</b>
401.bzip2	80	1550	498	<b>1548</b>	<b>499</b>	1546	499	80	<b>1468</b>	<b>526</b>	1465	527	1480	522
403.gcc	80	<b>909</b>	<b>709</b>	906	711	915	704	80	<b>908</b>	<b>710</b>	907	710	908	709
429.mcf	80	<b>696</b>	<b>1050</b>	698	1040	696	1050	80	654	1120	<b>653</b>	<b>1120</b>	652	1120
445.gobmk	80	<b>1044</b>	<b>804</b>	1044	804	1044	804	80	<b>990</b>	<b>847</b>	991	847	990	847
456.hammer	80	<b>687</b>	<b>1090</b>	683	1090	687	1090	80	542	1380	<b>542</b>	<b>1380</b>	543	1380
458.sjeng	80	1248	775	<b>1247</b>	<b>776</b>	1247	776	80	<b>1168</b>	<b>829</b>	1168	829	1167	829
462.libquantum	80	<b>409</b>	<b>4050</b>	407	4070	411	4040	80	<b>409</b>	<b>4050</b>	407	4070	411	4040
464.h264ref	80	<b>1603</b>	<b>1100</b>	1612	1100	1603	1100	80	<b>1625</b>	<b>1090</b>	1622	1090	1626	1090
471.omnetpp	80	980	510	<b>979</b>	<b>511</b>	979	511	80	<b>920</b>	<b>543</b>	920	544	921	543
473.astar	80	1094	513	1091	515	<b>1092</b>	<b>514</b>	80	1094	513	1091	515	<b>1092</b>	<b>514</b>
483.xalancbmk	80	644	857	<b>644</b>	<b>857</b>	645	856	80	644	857	<b>644</b>	<b>857</b>	645	856

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

ulimit -s unlimited was used to set the stacksize to unlimited prior to run  
Large pages were disabled for this run

## Platform Notes

BIOS Configuration : Data Reuse Optimization = Disabled

## General Notes

Binaries compiled on RHEL5.5 with  
binutils-2.17.50.0.6-14.el5

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint\_rate2006 = 918

Cisco UCS B440 M2 (Intel Xeon E7-4850, 2.00 GHz)

SPECint\_rate\_base2006 = 866

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Jun-2011

Hardware Availability: May-2011

Software Availability: Mar-2011

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/smartheap -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint\_rate2006 = 918

Cisco UCS B440 M2 (Intel Xeon E7-4850, 2.00 GHz)

SPECint\_rate\_base2006 = 866

CPU2006 license: 9019

Test date: Jun-2011

Test sponsor: Cisco Systems

Hardware Availability: May-2011

Tested by: Cisco Systems

Software Availability: Mar-2011

## Peak Portability Flags (Continued)

456.hmmr: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

401.bzp2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/smartheap -lsmartheap

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint\_rate2006 = 918

Cisco UCS B440 M2 (Intel Xeon E7-4850, 2.00 GHz)

SPECint\_rate\_base2006 = 866

CPU2006 license: 9019

Test date: Jun-2011

Test sponsor: Cisco Systems

Hardware Availability: May-2011

Tested by: Cisco Systems

Software Availability: Mar-2011

## Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 17:24:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 29 June 2011.