



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

### SPECfp<sup>®</sup>\_rate2006 = 145

NovaScale T860 F2 (Intel Xeon L5630, 2.13 GHz)

### SPECfp\_rate\_base2006 = 142

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Jul-2011

Hardware Availability: Mar-2010

Software Availability: Jan-2011

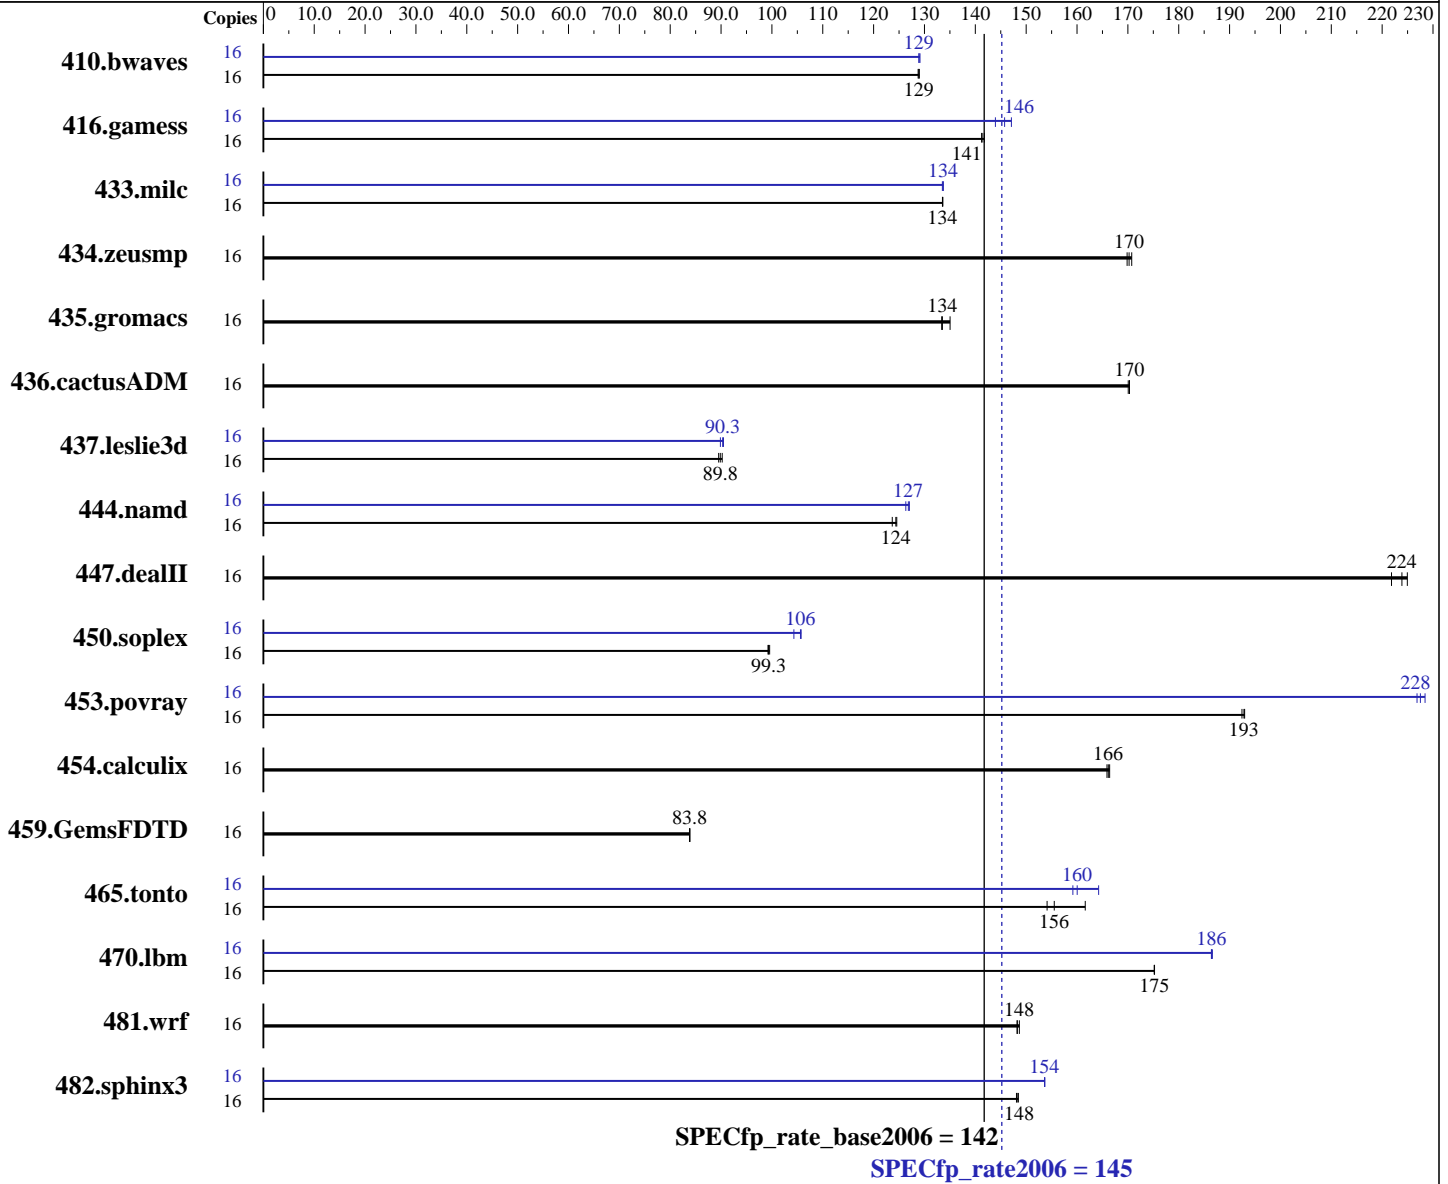

### Hardware

CPU Name: Intel Xeon L5630  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz  
 CPU MHz: 2133  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp\_rate2006 = 145

NovaScale T860 F2 (Intel Xeon L5630, 2.13 GHz)

SPECfp\_rate\_base2006 = 142

CPU2006 license: 20

Test date: Jul-2011

Test sponsor: Bull SAS

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Jan-2011

L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC, running at 1066 MHz)  
 Disk Subsystem: 1 x 146 GB 15000 RPM SAS  
 Other Hardware: None

Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	16	1686	129	<b>1687</b>	<b>129</b>	1689	129	16	1687	129	<b>1687</b>	<b>129</b>	1684	129		
416.gamess	16	<b>2217</b>	<b>141</b>	2218	141	2210	142	16	2130	147	2176	144	<b>2149</b>	<b>146</b>		
433.milc	16	1099	134	1100	134	<b>1100</b>	<b>134</b>	16	1099	134	<b>1099</b>	<b>134</b>	1100	134		
434.zeusmp	16	<b>855</b>	<b>170</b>	857	170	853	171	16	<b>855</b>	<b>170</b>	857	170	853	171		
435.gromacs	16	846	135	856	133	<b>856</b>	<b>134</b>	16	846	135	856	133	<b>856</b>	<b>134</b>		
436.cactusADM	16	<b>1123</b>	<b>170</b>	1123	170	1124	170	16	<b>1123</b>	<b>170</b>	1123	170	1124	170		
437.leslie3d	16	1680	89.5	<b>1674</b>	<b>89.8</b>	1667	90.2	16	1674	89.9	<b>1665</b>	<b>90.3</b>	1662	90.5		
444.namd	16	1030	125	<b>1032</b>	<b>124</b>	1038	124	16	1016	126	1010	127	<b>1012</b>	<b>127</b>		
447.dealII	16	<b>818</b>	<b>224</b>	814	225	825	222	16	<b>818</b>	<b>224</b>	814	225	825	222		
450.soplex	16	1345	99.2	1340	99.6	<b>1343</b>	<b>99.3</b>	16	1279	104	<b>1263</b>	<b>106</b>	1262	106		
453.povray	16	<b>441</b>	<b>193</b>	442	192	441	193	16	<b>374</b>	<b>228</b>	373	228	375	227		
454.calculix	16	796	166	793	166	<b>794</b>	<b>166</b>	16	796	166	793	166	<b>794</b>	<b>166</b>		
459.GemsFDTD	16	2024	83.9	<b>2025</b>	<b>83.8</b>	2026	83.8	16	2024	83.9	<b>2025</b>	<b>83.8</b>	2026	83.8		
465.tonto	16	974	162	1022	154	<b>1012</b>	<b>156</b>	16	989	159	<b>984</b>	<b>160</b>	959	164		
470.lbm	16	1255	175	<b>1255</b>	<b>175</b>	1255	175	16	1179	186	1178	187	<b>1179</b>	<b>186</b>		
481.wrf	16	<b>1205</b>	<b>148</b>	1202	149	1206	148	16	<b>1205</b>	<b>148</b>	1202	149	1206	148		
482.sphinx3	16	2100	148	<b>2104</b>	<b>148</b>	2106	148	16	2029	154	2030	154	<b>2030</b>	<b>154</b>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
 numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages  
 echo 7200 > /proc/sys/vm/nr\_hugepages  
 export HUGETLB\_MORECORE=yes  
 export LD\_PRELOAD=/usr/lib64/libhugetlbfs.so



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp\_rate2006 = 145

NovaScale T860 F2 (Intel Xeon L5630, 2.13 GHz)

SPECfp\_rate\_base2006 = 142

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Dell Inc.

Test date: Jul-2011  
Hardware Availability: Mar-2010  
Software Availability: Jan-2011

### Platform Notes

BIOS Settings:  
Power Management = Maximum Performance (Default = Active Power Controller)  
Data Reuse = Disabled (Default = Enabled)

### General Notes

Binaries were compiled on RHEL5.5  
The Dell PowerEdge T710 and  
the Bull NovaScale T860 F2 models are electronically equivalent.  
The results have been measured on a Dell PowerEdge T710 model

### Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

### Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp\_rate2006 = 145

NovaScale T860 F2 (Intel Xeon L5630, 2.13 GHz)

SPECfp\_rate\_base2006 = 142

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Dell Inc.

Test date: Jul-2011  
Hardware Availability: Mar-2010  
Software Availability: Jan-2011

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Fortran benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):  
icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp\_rate2006 = 145

NovaScale T860 F2 (Intel Xeon L5630, 2.13 GHz)

SPECfp\_rate\_base2006 = 142

CPU2006 license: 20

Test date: Jul-2011

Test sponsor: Bull SAS

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Jan-2011

## Peak Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

**SPECfp\_rate2006 = 145**

NovaScale T860 F2 (Intel Xeon L5630, 2.13 GHz)

**SPECfp\_rate\_base2006 = 142**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Dell Inc.

**Test date:** Jul-2011

**Hardware Availability:** Mar-2010

**Software Availability:** Jan-2011

## Peak Optimization Flags (Continued)

```
465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT
```

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 23:10:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 August 2011.