



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

SPECfp<sup>®</sup>2006 = 31.4

Intel DH61WW motherboard (Intel Pentium G860)

SPECfp\_base2006 = 27.1

CPU2006 license: 13


Test date: Oct-2011

Test sponsor: Intel Corporation

Hardware Availability: Sep-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

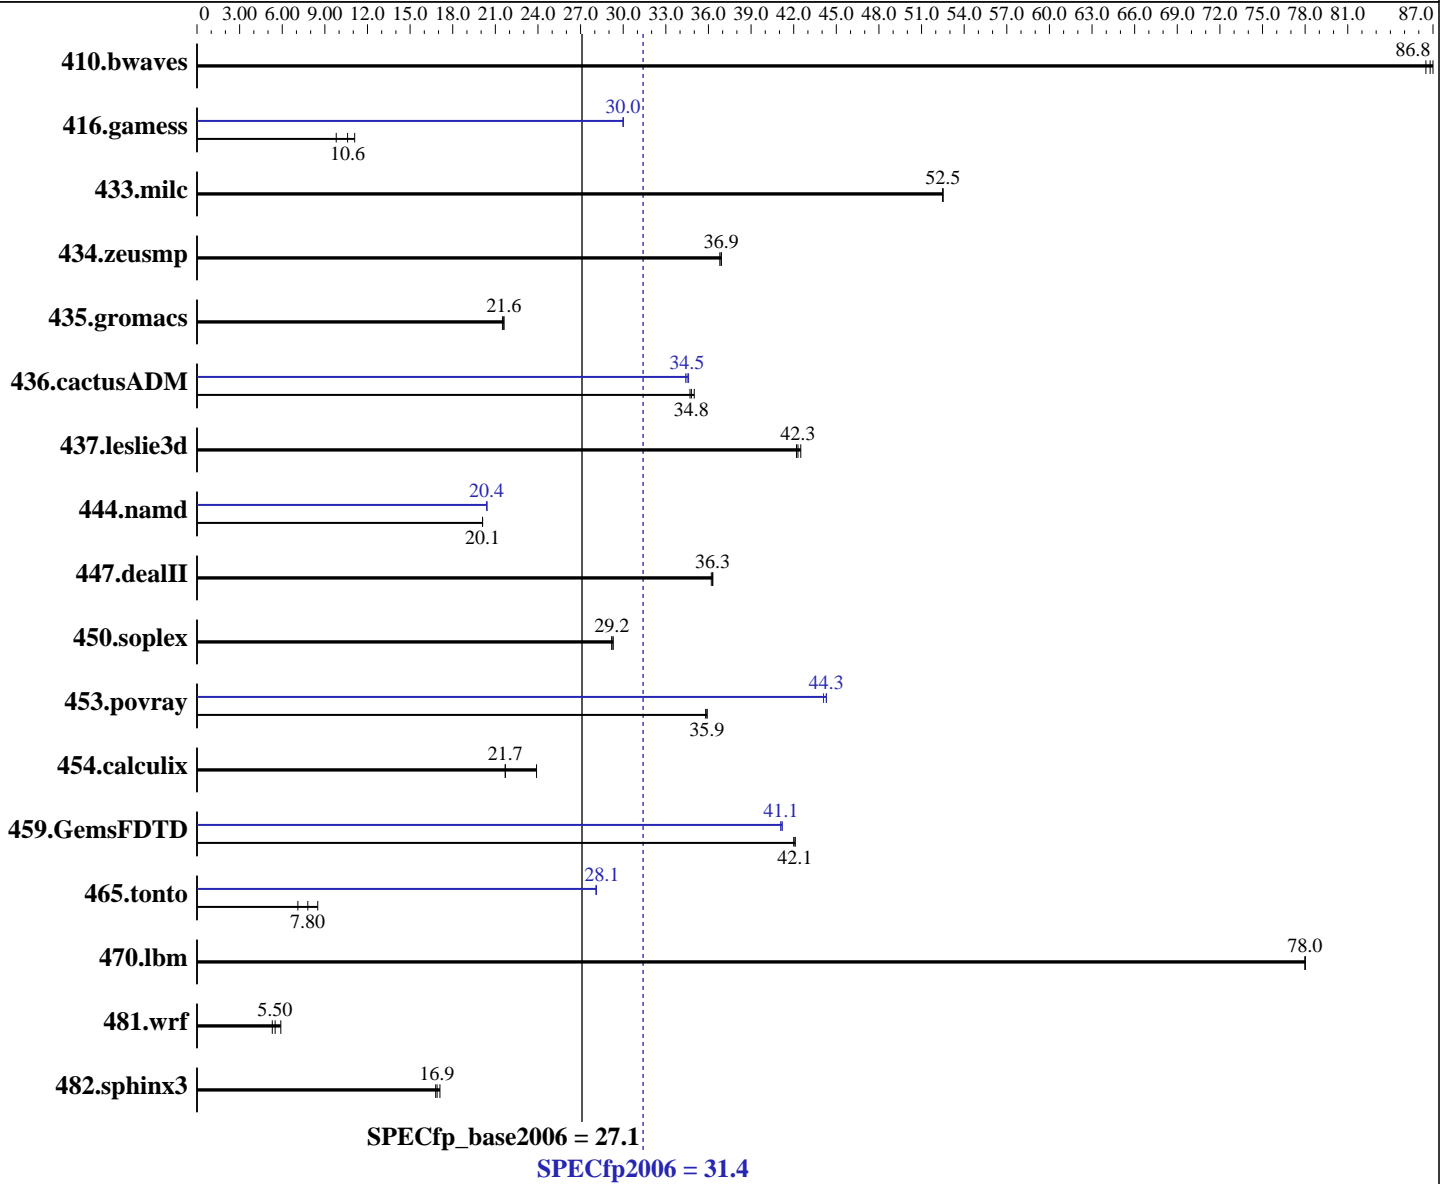

### Hardware

CPU Name: Intel Pentium G860  
 CPU Characteristics:  
 CPU MHz: 3000  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Windows 7 Ultimate (64-bit)  
 Compiler: C/C++: Version 12.0.3.176 of Intel C++ Studio XE for Windows;  
 Fortran: Version 12.0.3.176 of Intel Fortran Studio XE for Windows;  
 Libraries: Version 15.00.30729.01 of Microsoft Visual Studio 2008 Professional SP1  
 Auto Parallel: Yes  
 File System: NTFS

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

SPECfp2006 = **31.4**

Intel DH61WW motherboard (Intel Pentium G860)

SPECfp\_base2006 = **27.1**

CPU2006 license: 13

Test date: Oct-2011

Test sponsor: Intel Corporation

Hardware Availability: Sep-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

L3 Cache: 3 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 4 GB (2 x 2 GB 2Rx4 PC3-10600U-9)  
 Disk Subsystem: 1 TB Seagate SATA, 7200 RPM  
 Other Hardware: None

System State: Default  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap Library Version 9.01 from <http://www.microquill.com/>

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	157	86.5	<b>157</b>	<b>86.8</b>	156	87.0	157	86.5	<b>157</b>	<b>86.8</b>	156	87.0
416.gamess	<b>1851</b>	<b>10.6</b>	1766	11.1	2004	9.80	<b>653</b>	<b>30.0</b>	653	30.0	653	30.0
433.milc	175	52.5	<b>175</b>	<b>52.5</b>	175	52.5	175	52.5	<b>175</b>	<b>52.5</b>	175	52.5
434.zeusmp	247	36.9	<b>247</b>	<b>36.9</b>	248	36.8	247	36.9	<b>247</b>	<b>36.9</b>	248	36.8
435.gromacs	332	21.5	<b>331</b>	<b>21.6</b>	330	21.6	332	21.5	<b>331</b>	<b>21.6</b>	330	21.6
436.cactusADM	342	35.0	345	34.7	<b>344</b>	<b>34.8</b>	348	34.4	<b>346</b>	<b>34.5</b>	345	34.6
437.leslie3d	221	42.5	<b>222</b>	<b>42.3</b>	223	42.2	221	42.5	<b>222</b>	<b>42.3</b>	223	42.2
444.namd	400	20.1	399	20.1	<b>399</b>	<b>20.1</b>	<b>393</b>	<b>20.4</b>	393	20.4	393	20.4
447.dealII	<b>316</b>	<b>36.3</b>	315	36.3	316	36.2	<b>316</b>	<b>36.3</b>	315	36.3	316	36.2
450.soplex	<b>285</b>	<b>29.2</b>	285	29.3	286	29.2	<b>285</b>	<b>29.2</b>	285	29.3	286	29.2
453.povray	148	35.8	148	35.9	<b>148</b>	<b>35.9</b>	<b>120</b>	<b>44.3</b>	121	44.1	120	44.3
454.calculix	345	23.9	381	21.7	<b>380</b>	<b>21.7</b>	345	23.9	381	21.7	<b>380</b>	<b>21.7</b>
459.GemsFDTD	<b>252</b>	<b>42.1</b>	252	42.1	253	42.0	258	41.2	<b>258</b>	<b>41.1</b>	258	41.1
465.tonto	1159	8.50	<b>1266</b>	<b>7.80</b>	1385	7.10	351	28.1	350	28.1	<b>350</b>	<b>28.1</b>
470.lbm	176	78.0	<b>176</b>	<b>78.0</b>	176	78.0	176	78.0	<b>176</b>	<b>78.0</b>	176	78.0
481.wrf	<b>2025</b>	<b>5.50</b>	1888	5.90	2115	5.30	<b>2025</b>	<b>5.50</b>	1888	5.90	2115	5.30
482.sphinx3	1159	16.8	<b>1156</b>	<b>16.9</b>	1138	17.1	1159	16.8	<b>1156</b>	<b>16.9</b>	1138	17.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Component Notes

Tested systems can be used with Shin-G ATX case, PC Power and Cooling 1200W power supply

## General Notes

Binaries compiled on a system with 1x Intel Core i7-860 CPU  
 + 8GB memory using Windows 7 Enterprise 64-bit  
 OMP\_NUM\_THREADS set to number of processor cores  
 KMP\_AFFINITY set to granularity=fine,scatter



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 31.4

Intel DH61WW motherboard (Intel Pentium G860)

SPECfp\_base2006 = 27.1

CPU2006 license: 13

Test date: Oct-2011

Test sponsor: Intel Corporation

Hardware Availability: Sep-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

## Base Compiler Invocation

C benchmarks:

icl -Qvc9 -Qstd=c99

C++ benchmarks:

icl -Qvc9

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc9 -Qstd=c99 ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_P64 -names:lowercase  
 416.gamess: -DSPEC\_CPU\_P64  
 433.milc: -DSPEC\_CPU\_P64  
 434.zeusmp: -DSPEC\_CPU\_P64  
 435.gromacs: -DSPEC\_CPU\_P64  
 436.cactusADM: -DSPEC\_CPU\_P64 -names:lowercase /assume:underscore  
 437.lelie3d: -DSPEC\_CPU\_P64  
 444.namd: -DSPEC\_CPU\_P64 /TP  
 447.dealII: -DSPEC\_CPU\_P64 -DDEAL\_II\_MEMBER\_VAR\_SPECIALIZATION\_BUG  
 450.soplex: -DSPEC\_CPU\_P64  
 453.povray: -DSPEC\_CPU\_P64 -DSPEC\_CPU\_WINDOWS\_ICL  
 454.calculix: -DSPEC\_CPU\_P64 -DSPEC\_CPU\_NOZMODIFIER -names:lowercase  
 459.GemsFDTD: -DSPEC\_CPU\_P64  
 465.tonto: -DSPEC\_CPU\_P64  
 470.lbm: -DSPEC\_CPU\_P64  
 481.wrf: -DSPEC\_CPU\_P64 -DSPEC\_CPU\_WINDOWS\_ICL  
 482.sphinx3: -DSPEC\_CPU\_P64

## Base Optimization Flags

C benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias  
-Qopt-prefetch -Qauto-ilp32 /F1000000000

C++ benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias  
-Qopt-prefetch -Qcxx-features -Qauto-ilp32 /F1000000000 shlw64M.lib  
-link /FORCE:MULTIPLE

Fortran benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias  
-Qopt-prefetch /F1000000000

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 31.4

Intel DH61WW motherboard (Intel Pentium G860)

SPECfp\_base2006 = 27.1

CPU2006 license: 13

Test date: Oct-2011

Test sponsor: Intel Corporation

Hardware Availability: Sep-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias  
-Qopt-prefetch -Qauto-ilp32 /F1000000000

## Peak Compiler Invocation

C benchmarks:

icl -Qvc9 -Qstd=c99

C++ benchmarks:

icl -Qvc9

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc9 -Qstd=c99 ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000  
shlW64M.lib -link /FORCE:MULTIPLE

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias -Qauto-ilp32  
/F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 31.4

Intel DH61WW motherboard (Intel Pentium G860)

SPECfp\_base2006 = 27.1

CPU2006 license: 13

Test date: Oct-2011

Test sponsor: Intel Corporation

Hardware Availability: Sep-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

## Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias  
-Qscalar-rep- /F1000000000

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll2 -Qopt-prefetch -Qparallel  
/F1000000000

465.tonto: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll4 -Qauto -Qinline-calloc  
/F1000000000

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel -Qunroll2  
-Qauto-ilp32 /F1000000000

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revC.20111012.html>

<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revC.20111012.xml>

<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings-revC.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 31.4

Intel DH61WW motherboard (Intel Pentium G860)

SPECfp\_base2006 = 27.1

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Oct-2011

Hardware Availability: Sep-2011

Software Availability: Apr-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Thu Jul 24 01:45:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 25 October 2011.