



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint®2006 = 31.2

Intel DH61WW motherboard (Intel Pentium G630)

SPECint_base2006 = 29.8

CPU2006 license: 13


Test date: Oct-2011

Test sponsor: Intel Corporation

Hardware Availability: Sep-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

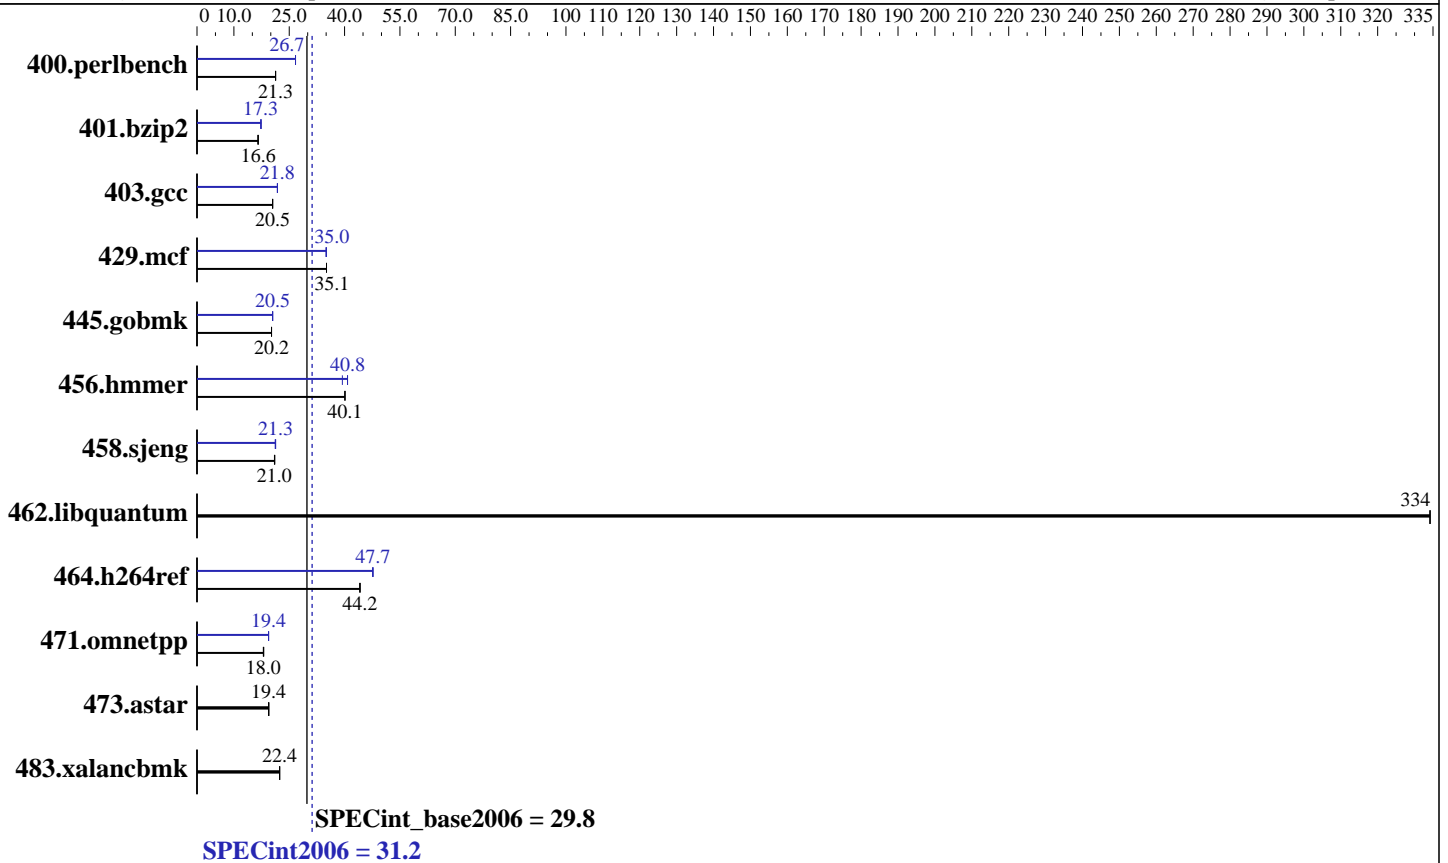

Hardware

CPU Name: Intel Pentium G630
 CPU Characteristics:
 CPU MHz: 2700
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 3 MB I+D on chip per chip
 Other Cache: None
 Memory: 2 GB (2 x 1 GB 2Rx4 PC3-10600U-9, running at 1066 MHz)
 Disk Subsystem: 1 TB Seagate SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Windows 7 Ultimate (64-bit)
 Compiler: C++: Version 12.0.3.176 of Intel C++ Studio XE for Windows;
 Libraries: Version 15.00.30729.01 of Microsoft Visual Studio 2008 Professional SP1
 Auto Parallel: Yes
 File System: NTFS
 System State: Default
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 9.01 from <http://www.microquill.com/>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 31.2

Intel DH61WW motherboard (Intel Pentium G630)

SPECint_base2006 = 29.8

CPU2006 license: 13

Test date: Oct-2011

Test sponsor: Intel Corporation

Hardware Availability: Sep-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	458	21.3	459	21.3	458	21.3	366	26.7	366	26.7	366	26.7
401.bzip2	583	16.6	583	16.5	580	16.6	559	17.3	557	17.3	556	17.4
403.gcc	393	20.5	392	20.5	392	20.5	369	21.8	369	21.8	369	21.8
429.mcf	260	35.1	260	35.1	260	35.1	260	35.1	260	35.0	260	35.0
445.gobmk	519	20.2	519	20.2	519	20.2	513	20.5	513	20.5	513	20.5
456.hammer	233	40.1	233	40.1	233	40.1	228	40.8	229	40.8	237	39.4
458.sjeng	575	21.0	574	21.1	575	21.0	569	21.3	570	21.2	569	21.3
462.libquantum	62.0	334	62.0	334	62.0	334	62.0	334	62.0	334	62.0	334
464.h264ref	501	44.1	501	44.2	501	44.2	465	47.6	464	47.7	464	47.7
471.omnetpp	346	18.1	346	18.0	347	18.0	323	19.4	323	19.4	322	19.4
473.astar	361	19.4	361	19.5	361	19.4	361	19.4	361	19.5	361	19.4
483.xalancbmk	308	22.4	308	22.4	308	22.4	308	22.4	308	22.4	308	22.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Component Notes

Tested systems can be used with Shin-G ATX case, PC Power and Cooling 1200W power supply

General Notes

Binaries compiled on a system with 1x Intel Core i7-860 CPU + 8GB memory using Windows 7 Enterprise 64-bit
OMP_NUM_THREADS set to number of processors cores
KMP_AFFINITY set to granularity=fine,scatter

Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc9
```

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64_X64  
-DSPEC_CPU_NO_NEED_VA_COPY
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 31.2

Intel DH61WW motherboard (Intel Pentium G630)

SPECint_base2006 = 29.8

CPU2006 license: 13

Test date: Oct-2011

Test sponsor: Intel Corporation

Hardware Availability: Sep-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Base Portability Flags (Continued)

```

401.bzip2: -DSPEC_CPU_P64
403.gcc: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64
429.mcf: -DSPEC_CPU_P64
445.gobmk: -DSPEC_CPU_P64
456.hmmer: -DSPEC_CPU_P64
458.sjeng: -DSPEC_CPU_P64
462.libquantum: -DSPEC_CPU_P64
464.h264ref: -DSPEC_CPU_P64 -DWIN32 -DSPEC_CPU_NO_INTTYPES
471.omnetpp: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64
473.astar: -DSPEC_CPU_P64
483.xalancbmk: -DSPEC_CPU_P64 -Qoption, cpp, --no_wchar_t_keyword

```

Base Optimization Flags

C benchmarks:

```

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel
-Qauto-ilp32 /F512000000

```

C++ benchmarks:

```

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
-Qauto-ilp32 /F512000000 shlW64M.lib -link /FORCE:MULTIPLE

```

Base Other Flags

C benchmarks:

```

403.gcc: -Dalloca=_alloca

```

Peak Compiler Invocation

C benchmarks:

```

icl -Qvc9 -Qstd=c99

```

C++ benchmarks:

```

icl -Qvc9

```

Peak Portability Flags

Same as Base Portability Flags



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 31.2

Intel DH61WW motherboard (Intel Pentium G630)

SPECint_base2006 = 29.8

CPU2006 license: 13

Test date: Oct-2011

Test sponsor: Intel Corporation

Hardware Availability: Sep-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Peak Optimization Flags

C benchmarks:

400.perlbench: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F512000000 shlw64M.lib
-link /FORCE:MULTIPLE

401.bzip2: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias
-Qauto-ilp32 /F512000000

403.gcc: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qauto-ilp32 /F512000000

429.mcf: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch
-Qauto-ilp32 /F512000000

445.gobmk: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O2 -Qprec-div- -Qansi-alias -Qauto-ilp32
/F512000000

456.hmmer: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias
-Qauto-ilp32 /F512000000

458.sjeng: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qauto-ilp32 /F512000000

462.libquantum: basepeak = yes

464.h264ref: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias
-Qauto-ilp32 /F512000000

C++ benchmarks:

471.omnetpp: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=block -Qauto-ilp32 /F512000000
shlw64M.lib -link /FORCE:MULTIPLE

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 31.2

Intel DH61WW motherboard (Intel Pentium G630)

SPECint_base2006 = 29.8

CPU2006 license: 13

Test date: Oct-2011

Test sponsor: Intel Corporation

Hardware Availability: Sep-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Peak Other Flags (Continued)

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revC.20111012.html>

<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revC.20111012.xml>

<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 00:52:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 November 2011.