



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®_rate2006 = 688

ProLiant BL685c G7
(1.70 GHz AMD Opteron 6164 HE)

SPECint_rate_base2006 = 597

CPU2006 license: 3


Test date: Oct-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2010

Tested by: Hewlett-Packard Company

Software Availability: Jul-2011

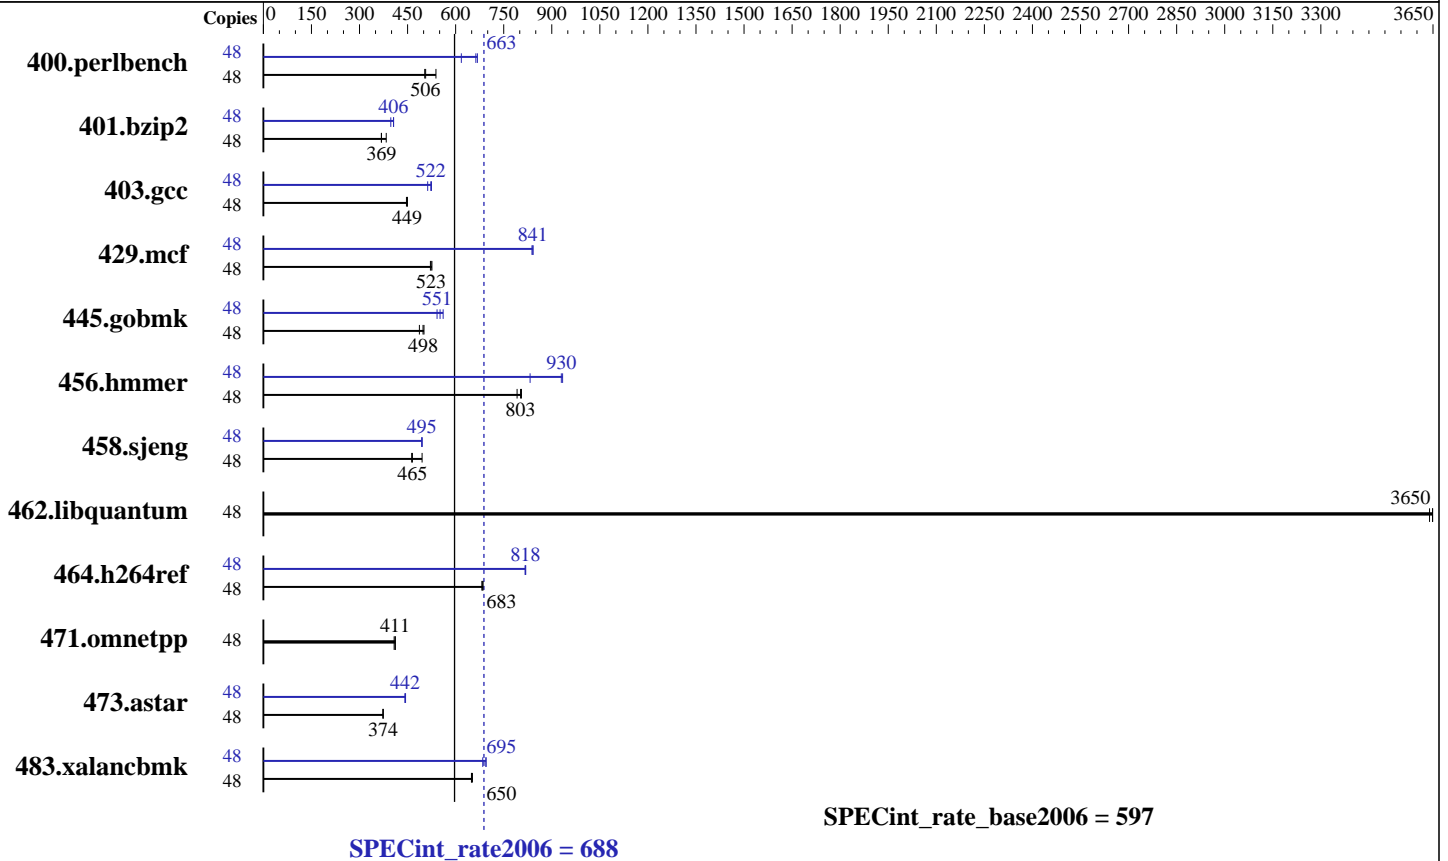

Hardware

CPU Name: AMD Opteron 6164 HE
 CPU Characteristics:
 CPU MHz: 1700
 FPU: Integrated
 CPU(s) enabled: 48 cores, 4 chips, 12 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores
 Other Cache: None
 Memory: 128 GB (32 x 4 GB 2Rx4 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 146 GB 10 K SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) SP1, Kernel 2.6.32.12-0.7-default
 Compiler: C/C++: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = **688**

ProLiant BL685c G7
(1.70 GHz AMD Opteron 6164 HE)

SPECint_rate_base2006 = 597

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Oct-2011
Hardware Availability: Jun-2010
Software Availability: Jul-2011

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	48	871	539	931	503	926	506	48	759	618	707	663	702	668		
401.bzip2	48	1208	383	1257	369	1258	368	48	1165	398	1141	406	1140	406		
403.gcc	48	860	449	865	446	861	449	48	740	522	737	525	754	513		
429.mcf	48	832	526	840	521	836	523	48	521	841	520	842	522	838		
445.gobmk	48	1005	501	1034	487	1011	498	48	929	542	913	551	898	561		
456.hammer	48	566	792	556	805	558	803	48	480	934	538	832	482	930		
458.sjeng	48	1173	495	1255	463	1249	465	48	1174	495	1174	495	1174	495		
462.libquantum	48	273	3640	273	3650	273	3650	48	273	3640	273	3650	273	3650		
464.h264ref	48	1558	682	1555	683	1549	686	48	1300	817	1297	819	1299	818		
471.omnetpp	48	729	411	729	412	735	408	48	729	411	729	412	735	408		
473.astar	48	903	373	902	374	902	374	48	762	442	762	442	759	444		
483.xalancbmk	48	510	650	508	652	510	649	48	484	685	477	695	477	695		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=21600 in /etc/sysctl.conf
mount -t hugetlbfs ndev /mnt/hugepages

Platform Notes

BIOS Configuration:
HP Power Profile set to Maximum Performance
Thermal Configuration set to Increased Cooling

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/opt/x86_open64-4.2.5.2/open64-gcc-4.2.0/lib:/opt/x86_open64-4.2.5.2/open64-gcc-4.2.0/lib64/lib"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 688

ProLiant BL685c G7
(1.70 GHz AMD Opteron 6164 HE)

SPECint_rate_base2006 = 597

CPU2006 license: 3

Test date: Oct-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2010

Tested by: Hewlett-Packard Company

Software Availability: Jul-2011

General Notes (Continued)

<http://developer.amd.com/cpu/open64>

Base Compiler Invocation

C benchmarks:
openc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=barcelona -mso -Ofast -CG:local_sched_alg=1
-INLINE:aggressive=on -IPA:plimit=8000 -IPA:small_pu=100
-HP:bdt=2m:heap=2m

C++ benchmarks:
-march=barcelona -mso -Ofast -m32 -INLINE:aggressive=on
-CG:cmp_peep=on -L/cpu2006/SmartHeap_8.1/lib -lsmarheap

Peak Compiler Invocation

C benchmarks:
openc

C++ benchmarks:
openCC



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 688

ProLiant BL685c G7
(1.70 GHz AMD Opteron 6164 HE)

SPECint_rate_base2006 = 597

CPU2006 license: 3

Test date: Oct-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2010

Tested by: Hewlett-Packard Company

Software Availability: Jul-2011

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalanbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -march=barcelona -mso -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
               -OPT:unroll_times_max=8 -OPT:unroll_size=256
               -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
               -CG:local_sched_alg=1 -CG:unroll_fb_req=on
               -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -mso -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
            -OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -mso -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
          -LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
          -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200

429.mcf: -march=barcelona -mso -O3 -ipa -INLINE:aggressive=on
          -CG:gcm=off -GRA:prioritize_by_density=on -m32
          -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -mso -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
            -OPT:unroll_times_max=8 -OPT:unroll_size=256
            -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
            -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
            -LNO:ignore_feedback=off -CG:p2align=on
            -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -march=barcelona -mso -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=0
            -OPT:alias=disjoint -OPT:unroll_times_max=8
            -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
            -CG:local_sched_alg=1 -CG:cflow=0
            -CG:push_pop_int_saved_regs=off -CG:cmp_peep=on
            -HP:bdt=2m:heap=2m

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 688

ProLiant BL685c G7
(1.70 GHz AMD Opteron 6164 HE)

SPECint_rate_base2006 = 597

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Oct-2011
Hardware Availability: Jun-2010
Software Availability: Jul-2011

Peak Optimization Flags (Continued)

458.sjeng: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
-LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
-IPA:pu_reorder=2 -CG:ptr_load_use=0
-OPT:unroll_times_max=8 -INLINE:aggressive=on

462.libquantum: basepeak = yes

464.h264ref: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
-CG:push_pop_int_saved_regs=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
-WOPT:if_conv=0 -GRA:optimize_boundary=on
-OPT:alias=disjoint -INLINE:aggressive=on
-IPA:small_pu=3000 -IPA:plimit=3000 -m32
-HP:bdt=2m:heap=2m

483.xalancbmk: -march=barcelona -mso -Ofast -INLINE:aggressive=on -m32
-CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
-fno-emit-exceptions
-L/cpu2006/SmartHeap_8.1/lib -lsmartheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.html>
<http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.20100330.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.xml>
<http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.20100330.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 01:33:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 November 2011.