



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp[®]_rate2006 = 312

ProLiant BL465c G7
(2.4 GHz AMD Opteron 6234)

SPECfp_rate_base2006 = 292

CPU2006 license: 3


Test date: Oct-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2011

Tested by: Hewlett-Packard Company

Software Availability: Jul-2011

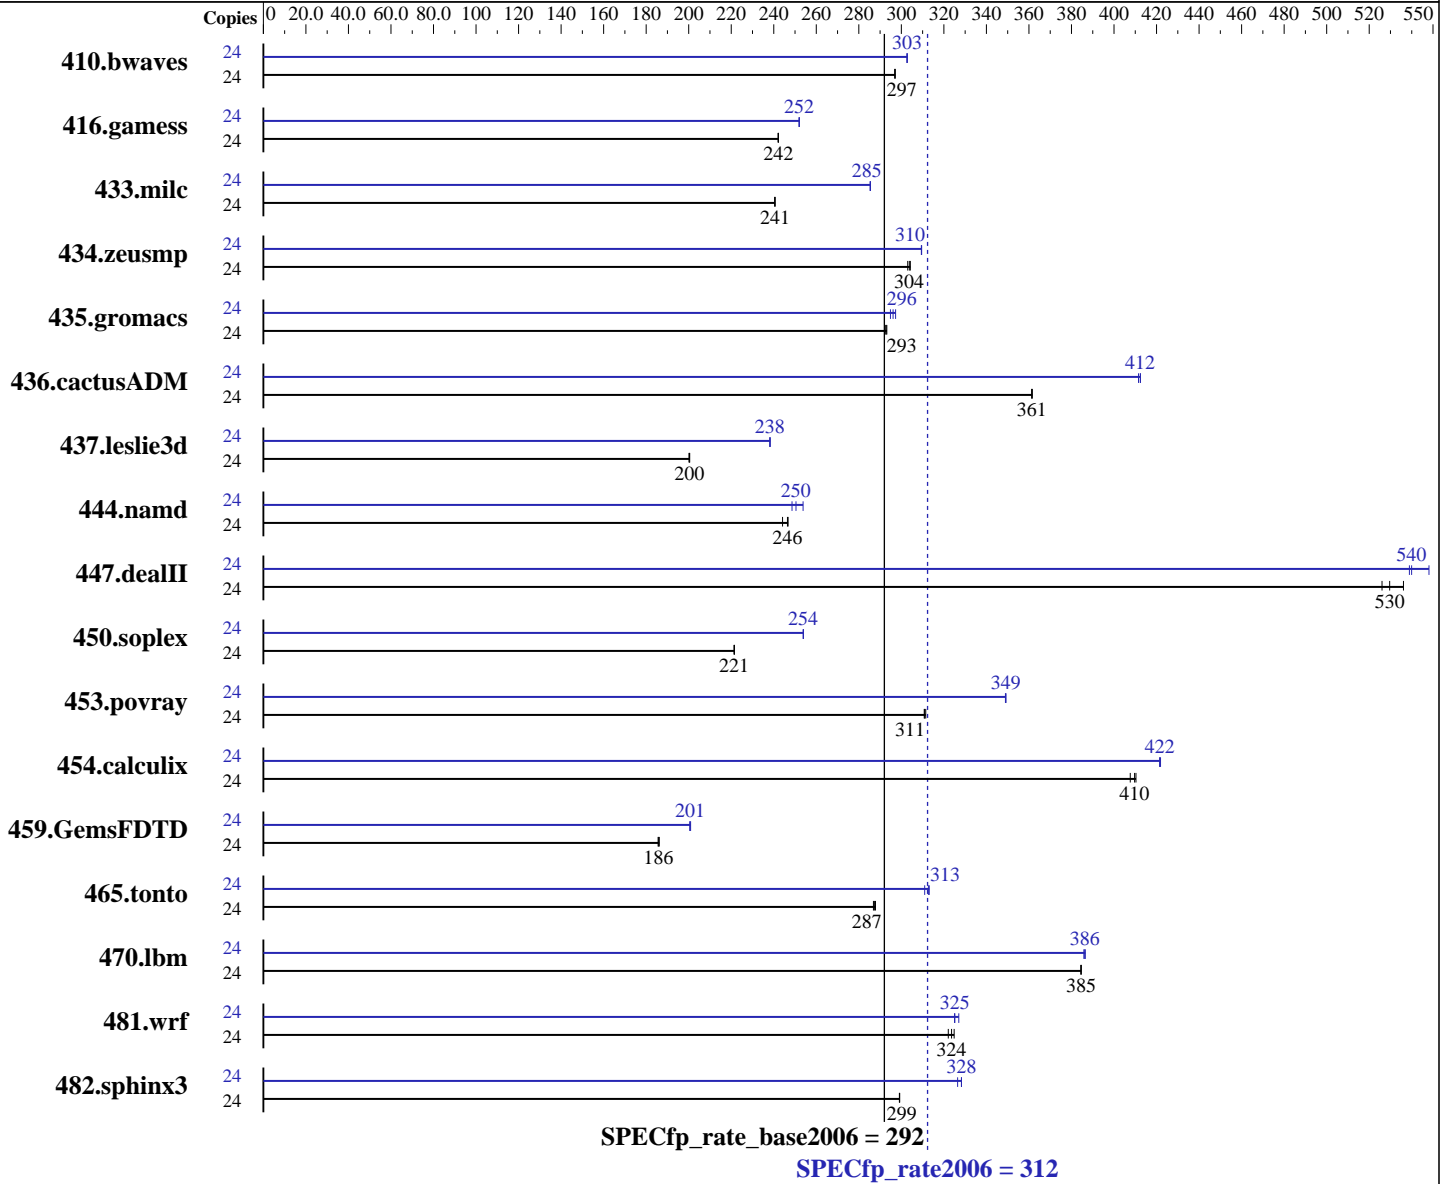

Hardware

CPU Name: AMD Opteron 6234
 CPU Characteristics: AMD Turbo CORE technology up to 3.00 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip
 CPU(s) orderable: 1,2 chips

Software

Operating System: Red Hat Enterprise Linux Server release 6.1, Kernel 2.6.32-131.0.15.el6.x86_64
 Compiler: C/C++/Fortran: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 312

ProLiant BL465c G7
(2.4 GHz AMD Opteron 6234)

SPECfp_rate_base2006 = 292

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Oct-2011
Hardware Availability: Nov-2011
Software Availability: Jul-2011

Primary Cache: 384 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core
Secondary Cache: 12 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 6 cores
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 146 GB 10 K SAS
Other Hardware: None

Other Software: None

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---------------|--------|-------------|------------|-------------|------------|------------|------------|--------|-------------|------------|-------------|------------|------------|------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 410.bwaves | 24 | <u>1098</u> | <u>297</u> | 1098 | 297 | 1099 | 297 | 24 | 1078 | 303 | <u>1077</u> | <u>303</u> | 1077 | 303 |
| 416.gamess | 24 | 1942 | 242 | <u>1940</u> | <u>242</u> | 1940 | 242 | 24 | <u>1865</u> | <u>252</u> | 1864 | 252 | 1865 | 252 |
| 433.milc | 24 | 916 | 240 | 916 | 241 | <u>916</u> | <u>241</u> | 24 | 772 | 285 | <u>772</u> | <u>285</u> | 772 | 285 |
| 434.zeusmp | 24 | 721 | 303 | <u>719</u> | <u>304</u> | 718 | 304 | 24 | <u>706</u> | <u>310</u> | 706 | 309 | 706 | 310 |
| 435.gromacs | 24 | 585 | 293 | <u>585</u> | <u>293</u> | 585 | 293 | 24 | 581 | 295 | 576 | 297 | <u>579</u> | <u>296</u> |
| 436.cactusADM | 24 | <u>794</u> | <u>361</u> | 794 | 361 | 793 | 362 | 24 | 695 | 412 | <u>696</u> | <u>412</u> | 697 | 412 |
| 437.leslie3d | 24 | 1127 | 200 | <u>1126</u> | <u>200</u> | 1126 | 200 | 24 | 947 | 238 | <u>947</u> | <u>238</u> | 947 | 238 |
| 444.namd | 24 | <u>781</u> | <u>246</u> | 780 | 247 | 788 | 244 | 24 | 758 | 254 | <u>769</u> | <u>250</u> | 774 | 249 |
| 447.dealII | 24 | 522 | 526 | <u>518</u> | <u>530</u> | 512 | 536 | 24 | 501 | 548 | 509 | 539 | <u>508</u> | <u>540</u> |
| 450.soplex | 24 | <u>904</u> | <u>221</u> | 904 | 222 | 904 | 221 | 24 | 788 | 254 | <u>788</u> | <u>254</u> | 788 | 254 |
| 453.povray | 24 | 410 | 311 | <u>411</u> | <u>311</u> | 411 | 311 | 24 | 366 | 349 | <u>366</u> | <u>349</u> | 366 | 349 |
| 454.calculix | 24 | 483 | 410 | 486 | 408 | <u>483</u> | <u>410</u> | 24 | 470 | 421 | 469 | 422 | <u>470</u> | <u>422</u> |
| 459.GemsFDTD | 24 | 1368 | 186 | <u>1370</u> | <u>186</u> | 1372 | 186 | 24 | <u>1269</u> | <u>201</u> | 1270 | 201 | 1267 | 201 |
| 465.tonto | 24 | <u>822</u> | <u>287</u> | 823 | 287 | 820 | 288 | 24 | <u>755</u> | <u>313</u> | 754 | 313 | 759 | 311 |
| 470.lbm | 24 | <u>858</u> | <u>385</u> | 857 | 385 | 858 | 384 | 24 | 855 | 386 | <u>854</u> | <u>386</u> | 853 | 386 |
| 481.wrf | 24 | <u>828</u> | <u>324</u> | 825 | 325 | 832 | 322 | 24 | 820 | 327 | 825 | 325 | <u>824</u> | <u>325</u> |
| 482.sphinx3 | 24 | 1563 | 299 | <u>1564</u> | <u>299</u> | 1564 | 299 | 24 | <u>1425</u> | <u>328</u> | 1425 | 328 | 1433 | 326 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set "echo never > /sys/kernel/mm/redhat_transparent_hugepage/enabled"
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL465c G7
(2.4 GHz AMD Opteron 6234)

SPECfp_rate2006 = 312

SPECfp_rate_base2006 = 292

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Oct-2011
Hardware Availability: Nov-2011
Software Availability: Jul-2011

Operating System Notes (Continued)

Set "kernel/randomize_va_space=0" in /etc/sysctl.conf
Set vm/nr_hugepages=21504 in /etc/sysctl.conf
Set "nodev /mnt/hugepages hugetlbfs defaults 0 0" in /etc/fstab

Platform Notes

BIOS settings:
HP Power Profile set to Maximum Performance
Thermal Configuration set to Increased Cooling

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "896"
LD_LIBRARY_PATH = "/cpu2006/amd1104-rate-libs-revA/32:/cpu2006/amd1104-rate-libs-revA/64"
The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Base Compiler Invocation

C benchmarks:
opencC
C++ benchmarks:
openCC
Fortran benchmarks:
openf95
Benchmarks using both Fortran and C:
opencC openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 312

ProLiant BL465c G7
(2.4 GHz AMD Opteron 6234)

SPECfp_rate_base2006 = 292

CPU2006 license: 3

Test date: Oct-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2011

Tested by: Hewlett-Packard Company

Software Availability: Jul-2011

Base Portability Flags (Continued)

```

450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
        -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso

```

C++ benchmarks:

```

-march=bdver1 -Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1
-INLINE:aggressive=on -HP:bd=2m:heap=2m -D__OPEN64_FAST_SET

```

Fortran benchmarks:

```

-march=bdver1 -Ofast -LNO:blocking=off -OPT:rsqrt=2
-OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso

```

Benchmarks using both Fortran and C:

```

-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso -LNO:blocking=off
-OPT:rsqrt=2 -OPT:unroll_size=256

```

Peak Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

openc openf95



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 312

ProLiant BL465c G7
(2.4 GHz AMD Opteron 6234)

SPECfp_rate_base2006 = 292

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Oct-2011
Hardware Availability: Nov-2011
Software Availability: Jul-2011

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on
-HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso

470.lbm: -march=bdver1 -Ofast -CG:cmp_peep=on
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -HP:bdt=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
-CG:cmp_peep=on -CG:local_sched_alg=2 -INLINE:aggressive=on
-LNO:prefetch=2 -LNO:prefetch_ahead=4 -mso

```

C++ benchmarks:

```

444.namd: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
-CG:local_sched_alg=2 -CG:load_exe=0 -OPT:unroll_size=256
-fno-exceptions -HP:bdt=2m:heap=2m

447.dealII: -march=bdver1 -Ofast -D__OPEN64_FAST_SET -static
-INLINE:aggressive=on -LNO:opt=0 -LNO:simd=0
-fno-emit-exceptions -m32 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
-GRA:unspill=on -CG:cmp_peep=on -CG:movext_icmp=off
-TENV:frame_pointer=off

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 312

ProLiant BL465c G7
(2.4 GHz AMD Opteron 6234)

SPECfp_rate_base2006 = 292

CPU2006 license: 3

Test date: Oct-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2011

Tested by: Hewlett-Packard Company

Software Availability: Jul-2011

Peak Optimization Flags (Continued)

450.soplex: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on -OPT:RO=1
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -fno-exceptions -m32
-HP:bd=2m:heap=2m -WOPT:sib=on

453.povray: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:pre_local_sched=off
-INLINE:aggressive=on -HP:bd=2m:heap=2m -OPT:transform=2
-OPT:alias=disjoint -WOPT:aggcm=0

Fortran benchmarks:

410.bwaves: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:Ofast -OPT:treeheight=on
-LNO:blocking=off -LNO:ignore_feedback=off -LNO:fu=4
-LNO:loop_model_simd=on -LNO:simd_rm_unity_remainder=on
-WOPT:aggstr=0 -HP:bd=2m:heap=2m -CG:cmp_peep=on

416.gamess: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-OPT:unroll_times_max=2 -CG:local_sched_alg=1
-HP:bd=2m:heap=2m -WOPT:sib=on

434.zeusmp: -march=bdver1 -Ofast -LNO:blocking=off -LNO:interchange=off
-HP:bd=2m:heap=2m

437.leslie3d: -march=bdver1 -Ofast -CG:pre_minreg_level=2 -LNO:simd=0
-LNO:fusion=2 -HP:bd=2m:heap=2m -mso

459.GemsFDTD: -march=bdver1 -Ofast -OPT:unroll_size=0 -LNO:fission=2
-CG:load_exe=0 -CG:local_sched_alg=2 -HP

465.tonto: -march=bdver1 -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525
-HP:bd=2m:heap=2m

Benchmarks using both Fortran and C:

435.gromacs: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2
-HP:bd=2m:heap=2m

436.cactusADM: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:blocking=off
-LNO:prefetch=2 -HP -CG:locs_shallow_depth=1 -CG:load_exe=0
-WOPT:sib=on

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 312

ProLiant BL465c G7
(2.4 GHz AMD Opteron 6234)

SPECfp_rate_base2006 = 292

CPU2006 license: 3

Test date: Oct-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2011

Tested by: Hewlett-Packard Company

Software Availability: Jul-2011

Peak Optimization Flags (Continued)

454.calculix: -march=bdver1 -Ofast -OPT:unroll_size=256
-GRA:optimize_boundary=on -HP:bdt=2m:heap=2m

481.wrf: -march=bdver1 -Ofast -LNO:blocking=off -LANG:copyinout=off
-IPA:callee_limit=5000 -GRA:prioritize_by_density=on
-CG:load_exe=1 -HP -WOPT:sib=on

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.html>

<http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.20100330.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.xml>

<http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.20100330.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Thu Jul 24 01:35:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 November 2011.