



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint®2006 = 35.4

Express5800/R110d-1E (Intel Pentium G630)

SPECint_base2006 = 33.6

CPU2006 license: 9006


Test date: Mar-2012

Test sponsor: NEC Corporation

Hardware Availability: Jan-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

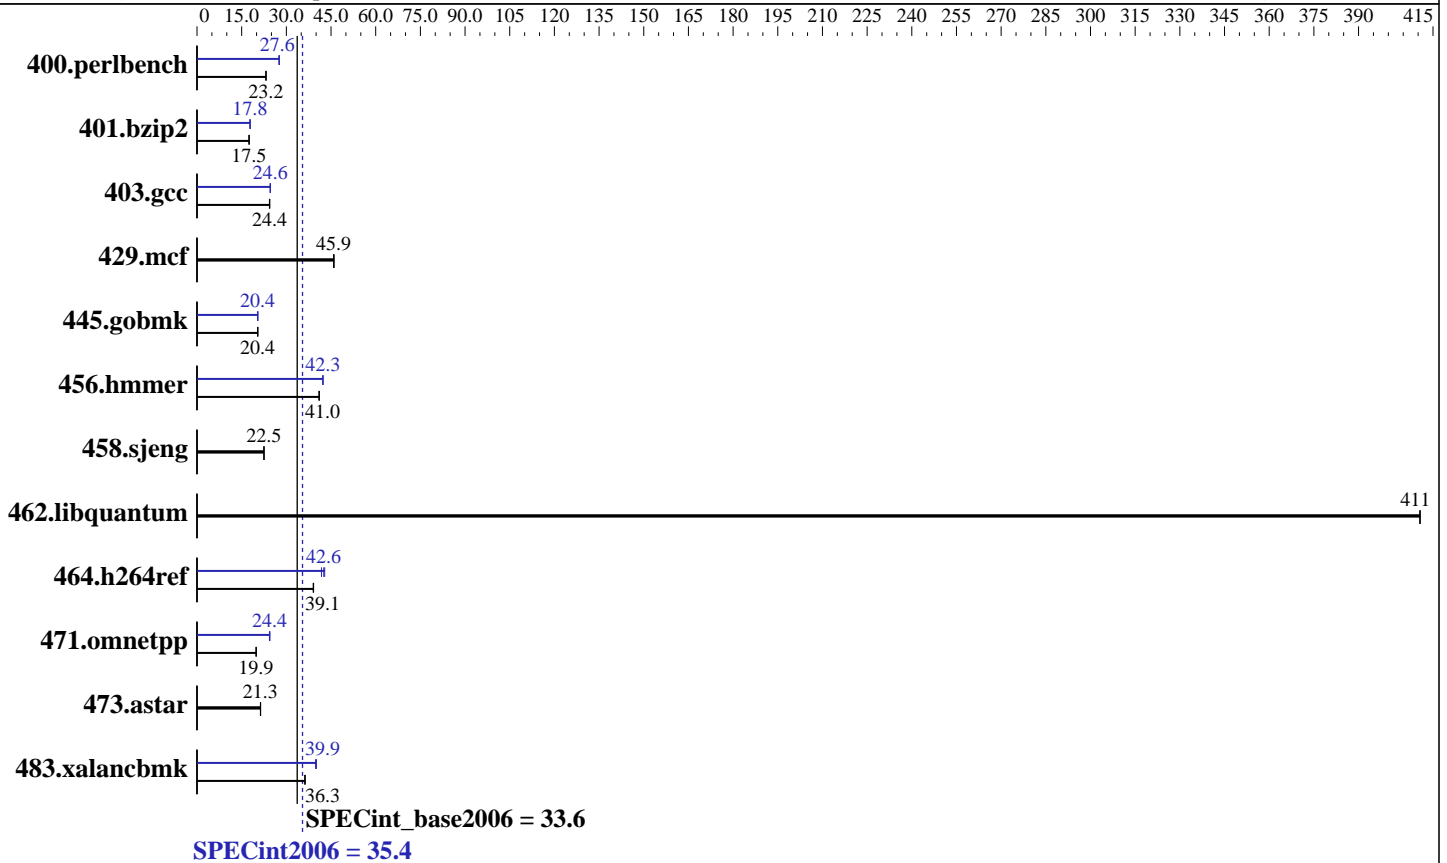

Hardware

CPU Name: Intel Pentium G630
 CPU Characteristics:
 CPU MHz: 2700
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 3 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600E-9, ECC, running at 1066 MHz and CL7)
 Disk Subsystem: 1 x 160 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.1 (Santiago)
 2.6.32-131.0.15.el6.x86_64
 Compiler: C/C++: Version 12.1.2.273 of Intel C++ Studio XE for Linux;
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 35.4

Express5800/R110d-1E (Intel Pentium G630)

SPECint_base2006 = 33.6

CPU2006 license: 9006

Test date: Mar-2012

Test sponsor: NEC Corporation

Hardware Availability: Jan-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<u>422</u>	<u>23.2</u>	421	23.2	422	23.1	354	27.6	<u>354</u>	<u>27.6</u>	355	27.6
401.bzip2	552	17.5	551	17.5	<u>552</u>	<u>17.5</u>	541	17.8	542	17.8	<u>542</u>	<u>17.8</u>
403.gcc	330	24.4	<u>330</u>	<u>24.4</u>	331	24.3	<u>327</u>	<u>24.6</u>	327	24.6	327	24.6
429.mcf	<u>199</u>	<u>45.9</u>	199	45.9	198	46.0	<u>199</u>	<u>45.9</u>	199	45.9	198	46.0
445.gobmk	514	20.4	514	20.4	<u>514</u>	<u>20.4</u>	514	20.4	<u>514</u>	<u>20.4</u>	514	20.4
456.hammer	228	41.0	<u>227</u>	<u>41.0</u>	227	41.0	221	42.3	221	42.3	<u>221</u>	<u>42.3</u>
458.sjeng	538	22.5	538	22.5	<u>538</u>	<u>22.5</u>	538	22.5	538	22.5	<u>538</u>	<u>22.5</u>
462.libquantum	<u>50.5</u>	<u>411</u>	50.5	411	50.5	411	<u>50.5</u>	<u>411</u>	50.5	411	50.5	411
464.h264ref	<u>566</u>	<u>39.1</u>	565	39.2	567	39.0	516	42.9	530	41.8	<u>520</u>	<u>42.6</u>
471.omnetpp	314	19.9	315	19.9	<u>315</u>	<u>19.9</u>	257	24.3	256	24.5	<u>256</u>	<u>24.4</u>
473.astar	<u>329</u>	<u>21.3</u>	328	21.4	330	21.3	<u>329</u>	<u>21.3</u>	328	21.4	330	21.3
483.xalancbmk	190	36.3	<u>190</u>	<u>36.3</u>	191	36.2	<u>173</u>	<u>39.9</u>	172	40.1	173	39.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Default BIOS settings were used.

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

OMP_NUM_THREADS = "2"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Added glibc-static-2.12-1.25.el6.x86_64.rpm
to enable static linking

Base Compiler Invocation

C benchmarks:

icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 35.4

Express5800/R110d-1E (Intel Pentium G630)

SPECint_base2006 = 33.6

CPU2006 license: 9006

Test date: Mar-2012

Test sponsor: NEC Corporation

Hardware Availability: Jan-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib64 -lsmartheap64

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 35.4

Express5800/R110d-1E (Intel Pentium G630)

SPECint_base2006 = 33.6

CPU2006 license: 9006

Test date: Mar-2012

Test sponsor: NEC Corporation

Hardware Availability: Jan-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

Peak Compiler Invocation (Continued)

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
-opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-alloc
-opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-ansi-alias

458.sjeng: basepeak = yes

462.libquantum: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 35.4

Express5800/R110d-1E (Intel Pentium G630)

SPECint_base2006 = 33.6

CPU2006 license: 9006

Test date: Mar-2012

Test sponsor: NEC Corporation

Hardware Availability: Jan-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/NEC-platform-Settings-V1.2-R110d-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/NEC-platform-Settings-V1.2-R110d-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 07:18:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 10 April 2012.