



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228
AMD Opteron 4276 HE

SPECfp[®]_rate2006 = 194

SPECfp_rate_base2006 = 178

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Mar-2012

Hardware Availability: Jun-2012

Software Availability: Jul-2011

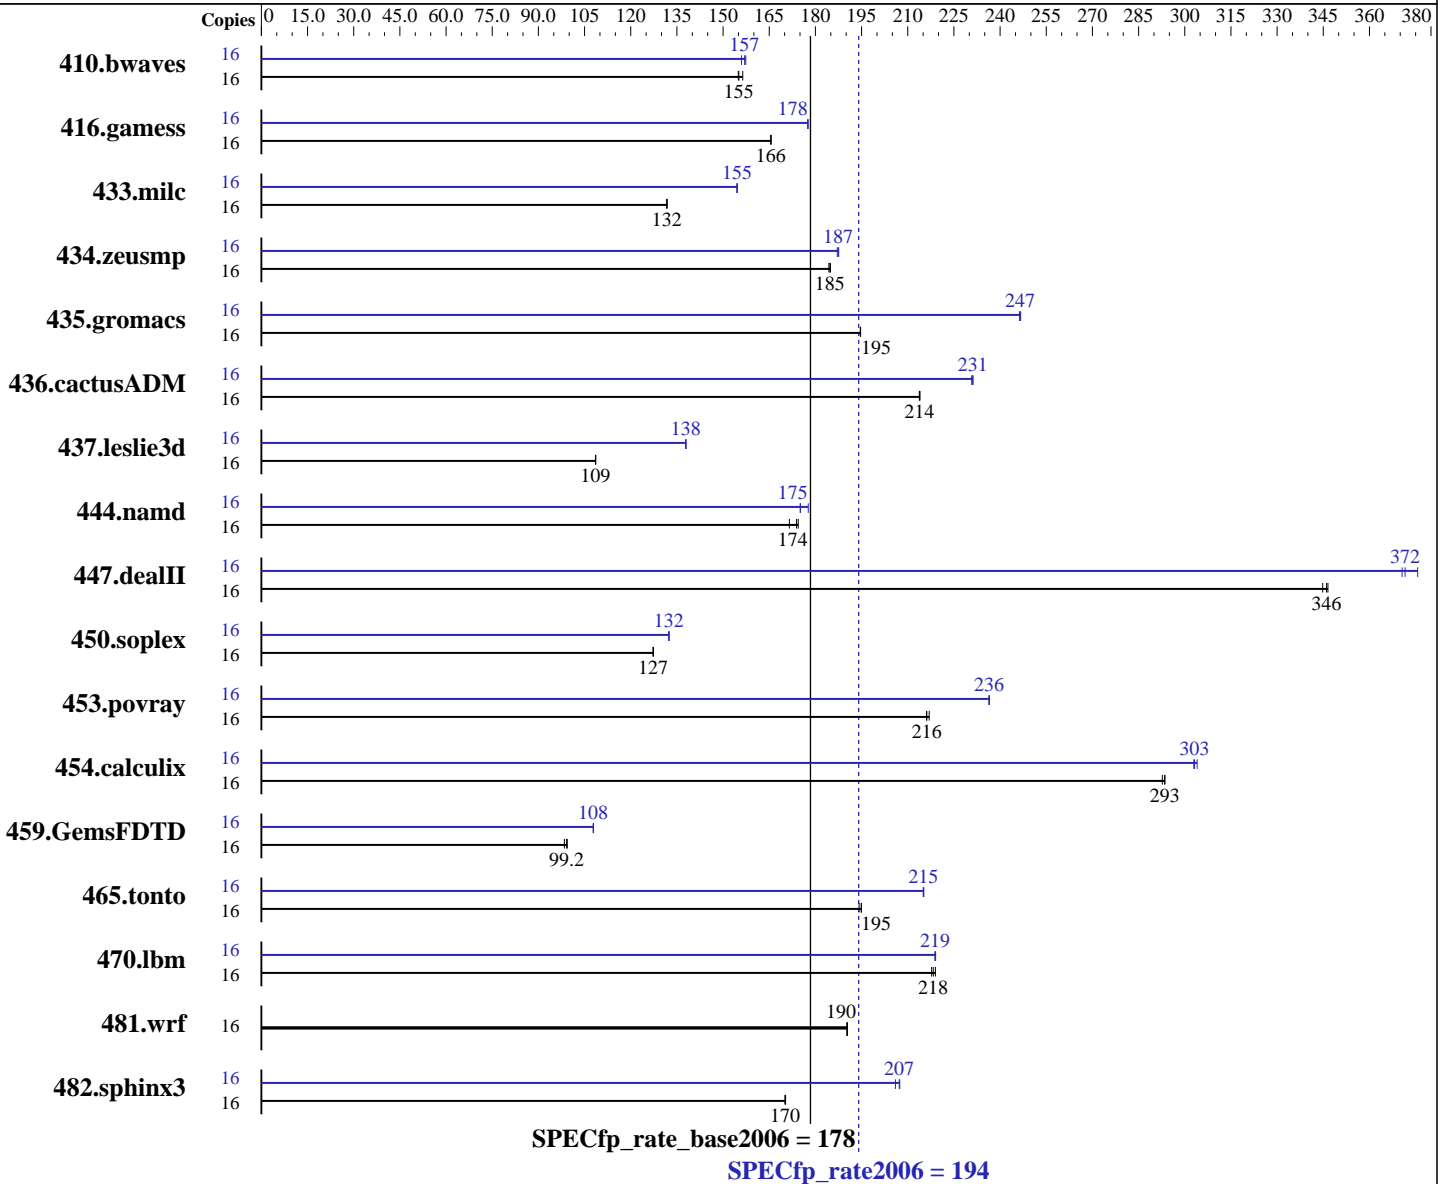

Hardware

CPU Name: AMD Opteron 4276 HE
 CPU Characteristics: AMD Turbo CORE technology up to 3.60 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip
 CPU(s) orderable: 1,2 chips

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.1, Kernel 2.6.32-131.0.15.el6.x86_64
 Compiler: C/C++/Fortran: Version 4.5.1 of x86 Open64 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228
AMD Opteron 4276 HE

SPECfp_rate2006 = **194**

SPECfp_rate_base2006 = **178**

CPU2006 license: 49
Test sponsor: Advanced Micro Devices
Tested by: Advanced Micro Devices

Test date: Mar-2012
Hardware Availability: Jun-2012
Software Availability: Jul-2011

Primary Cache: 256 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core
Secondary Cache: 8 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (4 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 128 GB SATA, 7200 RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1390	156	<u>1402</u>	<u>155</u>	1403	155	16	1394	156	1382	157	<u>1385</u>	<u>157</u>
416.gamess	16	1892	166	<u>1892</u>	<u>166</u>	1893	165	16	1764	178	<u>1764</u>	<u>178</u>	1765	178
433.milc	16	1114	132	<u>1115</u>	<u>132</u>	1115	132	16	<u>950</u>	<u>155</u>	950	155	950	155
434.zeusmp	16	788	185	790	184	<u>788</u>	<u>185</u>	16	<u>778</u>	<u>187</u>	<u>777</u>	<u>187</u>	776	188
435.gromacs	16	<u>587</u>	<u>195</u>	587	195	587	195	16	464	246	<u>463</u>	<u>247</u>	463	247
436.cactusADM	16	894	214	<u>894</u>	<u>214</u>	894	214	16	<u>827</u>	<u>231</u>	827	231	829	231
437.leslie3d	16	<u>1385</u>	<u>109</u>	1386	109	1385	109	16	1091	138	<u>1091</u>	<u>138</u>	1090	138
444.namd	16	748	172	<u>738</u>	<u>174</u>	736	174	16	<u>733</u>	<u>175</u>	733	175	722	178
447.dealII	16	528	347	531	345	<u>529</u>	<u>346</u>	16	494	371	487	376	<u>493</u>	<u>372</u>
450.soplex	16	<u>1048</u>	<u>127</u>	1049	127	1047	127	16	1007	132	1008	132	<u>1008</u>	<u>132</u>
453.povray	16	<u>394</u>	<u>216</u>	392	217	394	216	16	360	237	360	236	<u>360</u>	<u>236</u>
454.calculix	16	<u>450</u>	<u>293</u>	450	294	451	293	16	436	303	<u>435</u>	<u>303</u>	434	304
459.GemsFDTD	16	1724	98.4	1708	99.4	<u>1712</u>	<u>99.2</u>	16	<u>1574</u>	<u>108</u>	1574	108	1573	108
465.tonto	16	<u>808</u>	<u>195</u>	811	194	808	195	16	732	215	<u>732</u>	<u>215</u>	732	215
470.lbm	16	1004	219	<u>1007</u>	<u>218</u>	1010	218	16	1004	219	<u>1004</u>	<u>219</u>	1004	219
481.wrf	16	939	190	<u>939</u>	<u>190</u>	940	190	16	939	190	<u>939</u>	<u>190</u>	940	190
482.sphinx3	16	<u>1832</u>	<u>170</u>	1831	170	1833	170	16	1514	206	<u>1505</u>	<u>207</u>	1504	207

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Transparent huge pages were enabled for this run (OS default)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228
AMD Opteron 4276 HE

SPECfp_rate2006 = 194

SPECfp_rate_base2006 = 178

CPU2006 license: 49
Test sponsor: Advanced Micro Devices
Tested by: Advanced Micro Devices

Test date: Mar-2012
Hardware Availability: Jun-2012
Software Availability: Jul-2011

Operating System Notes (Continued)

Huge pages were not configured for this run.

Set kernel/randomize_va_space=0 in /etc/sysctl.conf

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/work/cpu2006v1.2/amd1104-rate-libs-revC/32:/root/work/cpu2006v1.2/amd1104-rate-libs-revC/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6274 chips + 64GB Memory using RHEL 6.1

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228
AMD Opteron 4276 HE

SPECfp_rate2006 = 194

SPECfp_rate_base2006 = 178

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Mar-2012

Hardware Availability: Jun-2012

Software Availability: Jul-2011

Base Portability Flags (Continued)

481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso

C++ benchmarks:

-march=bdver1 -Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1
-INLINE:aggressive=on -HP:bd=2m:heap=2m -D__OPEN64_FAST_SET

Fortran benchmarks:

-march=bdver1 -Ofast -LNO:blocking=off -OPT:rsqrt=2
-OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso

Benchmarks using both Fortran and C:

-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso -LNO:blocking=off
-OPT:rsqrt=2 -OPT:unroll_size=256

Peak Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

openc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228
AMD Opteron 4276 HE

SPECfp_rate2006 = 194

SPECfp_rate_base2006 = 178

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Mar-2012

Hardware Availability: Jun-2012

Software Availability: Jul-2011

Peak Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on
-HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso

470.lbm: -march=bdver1 -Ofast -CG:cmp_peep=on
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -HP:bdt=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=1000
-OPT:malloc_alg=2 -CG:cmp_peep=on -CG:local_sched_alg=2
-CG:p2align=0 -INLINE:aggressive=on -LNO:prefetch=2
-LNO:prefetch_ahead=4 -mso

```

C++ benchmarks:

```

444.namd: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=3000
-LNO:ignore_feedback=off -CG:local_sched_alg=2
-CG:load_exe=0 -OPT:unroll_size=256 -fno-exceptions
-HP:bdt=2m:heap=2m

447.dealIII: -march=bdver1 -Ofast -D__OPEN64_FAST_SET -static
-INLINE:aggressive=on -LNO:opt=0 -LNO:simd=0
-fno-emit-exceptions -m32 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
-GRA:unspill=on -CG:cmp_peep=on -CG:movext_icmp=off
-TENV:frame_pointer=off

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228
AMD Opteron 4276 HE

SPECfp_rate2006 = 194

SPECfp_rate_base2006 = 178

CPU2006 license: 49
Test sponsor: Advanced Micro Devices
Tested by: Advanced Micro Devices

Test date: Mar-2012
Hardware Availability: Jun-2012
Software Availability: Jul-2011

Peak Optimization Flags (Continued)

450.soplex: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:ignore_feedback=off
-INLINE:aggressive=on -OPT:RO=1 -OPT:IEEE_arith=3
-OPT:IEEE_NaN_Inf=off -OPT:fold_unsigned_relops=on
-fno-exceptions -CG:p2align=0 -m32 -HP:bd=2m:heap=2m
-WOPT:sib=on

453.povray: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:pre_local_sched=off
-CG:p2align=0 -CG:p2align_split=on -CG:dsched=on
-INLINE:aggressive=on -HP:bd=2m:heap=2m -OPT:transform=2
-OPT:alias=disjoint -WOPT:aggcm=0

Fortran benchmarks:

410.bwaves: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:Ofast -OPT:treeheight=on
-LNO:blocking=off -LNO:ignore_feedback=off -LNO:fu=4
-LNO:loop_model_simd=on -LNO:simd_rm_unity_remainder=on
-WOPT:aggstr=0 -HP:bd=2m:heap=2m -CG:cmp_peep=on

416.gamess: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-OPT:unroll_times_max=2 -CG:local_sched_alg=1
-HP:bd=2m:heap=2m -WOPT:sib=on

434.zeusmp: -march=bdver1 -Ofast -LNO:blocking=off -LNO:interchange=off
-IPA:plimit=1500 -HP:bd=2m:heap=2m

437.leslie3d: -march=bdver1 -Ofast -CG:pre_minreg_level=2 -LNO:simd=0
-LNO:fusion=2 -HP:bd=2m:heap=2m -mso

459.GemsFDTD: -march=bdver1 -Ofast -IPA:plimit=1500 -OPT:unroll_size=0
-LNO:fission=2 -CG:load_exe=0 -CG:local_sched_alg=2 -HP

465.tonto: -march=bdver1 -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525
-HP:bd=2m:heap=2m

Benchmarks using both Fortran and C:

435.gromacs: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2
-HP:bd=2m:heap=2m -CG:local_sched_alg=2 -GRA:unspill=ON
-CG:load_exe=3 -LNO:simd=3

436.cactusADM: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:blocking=off
-LNO:prefetch=2 -HP -CG:locs_shallow_depth=1 -CG:load_exe=0
-CG:dsched=on -WOPT:sib=on

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228
AMD Opteron 4276 HE

SPECfp_rate2006 = 194

SPECfp_rate_base2006 = 178

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Mar-2012

Hardware Availability: Jun-2012

Software Availability: Jul-2011

Peak Optimization Flags (Continued)

454.calculix: -march=bdver1 -Ofast -OPT:unroll_size=256
-GRA:optimize_boundary=on -CG:dsched=on -HP:bdt=2m:heap=2m

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC-I.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC-I.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 04:29:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 June 2012.