



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp[®]_rate2006 = 331

BladeSymphony BS520A (Intel Xeon E5-2440)

SPECfp_rate_base2006 = 322

CPU2006 license: 35


Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jun-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

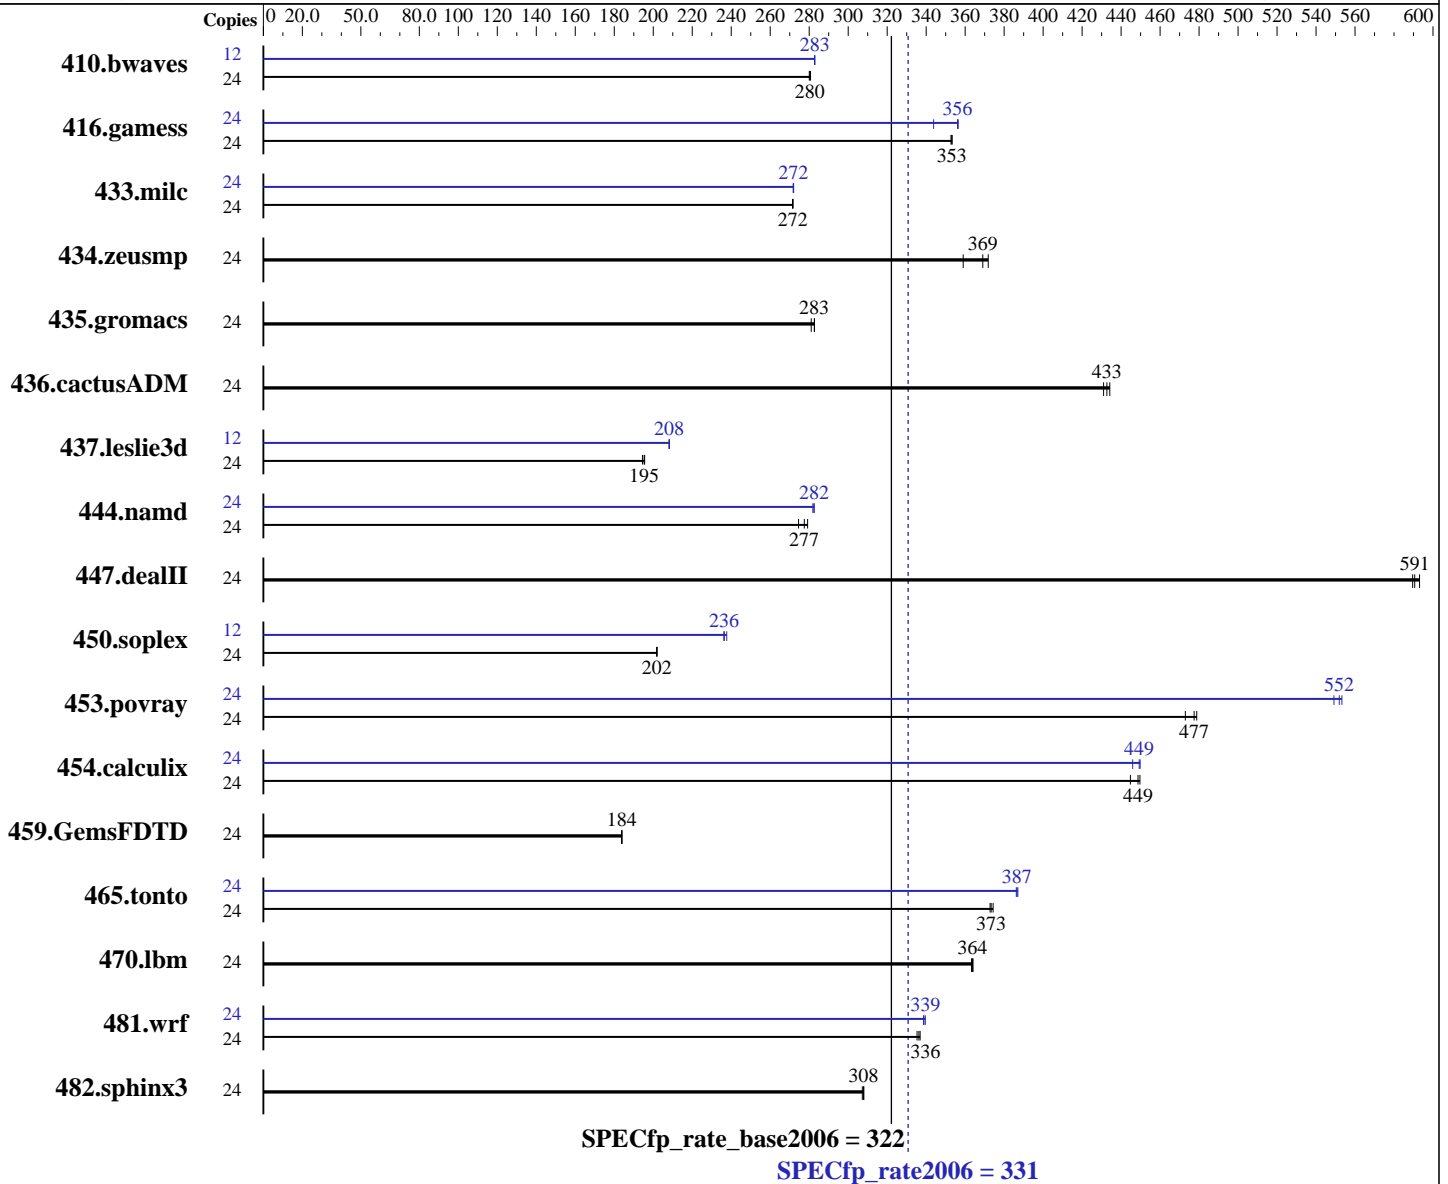

Hardware

CPU Name: Intel Xeon E5-2440
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2, Kernel 2.6.32-220.4.2.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux; Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp_rate2006 = 331

BladeSymphony BS520A (Intel Xeon E5-2440)

SPECfp_rate_base2006 = 322

CPU2006 license: 35

Test date: Jun-2012

Test sponsor: HITACHI

Hardware Availability: Jun-2012

Tested by: HITACHI

Software Availability: Feb-2012

L3 Cache: 15 MB I+D on chip per chip
Other Cache: None
Memory: 96 GB (12 x 8 GB 2Rx4 PC3L-10600R-9, ECC)
Disk Subsystem: 2 x 147 GB SAS, 15000 RPM RAID1 configuration
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1165	280	1162	281	<u>1163</u>	<u>280</u>	12	577	283	577	283	<u>577</u>	<u>283</u>
416.gamess	24	1330	353	1332	353	<u>1331</u>	<u>353</u>	24	1318	356	1367	344	<u>1320</u>	<u>356</u>
433.milc	24	811	272	<u>811</u>	<u>272</u>	812	271	24	811	272	<u>810</u>	<u>272</u>	810	272
434.zeusmp	24	608	359	<u>592</u>	<u>369</u>	587	372	24	608	359	<u>592</u>	<u>369</u>	587	372
435.gromacs	24	606	283	610	281	<u>606</u>	<u>283</u>	24	606	283	610	281	<u>606</u>	<u>283</u>
436.cactusADM	24	665	431	<u>663</u>	<u>433</u>	661	434	24	665	431	<u>663</u>	<u>433</u>	661	434
437.leslie3d	24	1160	194	1153	196	<u>1155</u>	<u>195</u>	12	542	208	542	208	<u>542</u>	<u>208</u>
444.namd	24	689	279	701	275	<u>694</u>	<u>277</u>	24	<u>681</u>	<u>282</u>	681	283	683	282
447.dealII	24	<u>465</u>	<u>591</u>	466	590	463	593	24	<u>465</u>	<u>591</u>	466	590	463	593
450.soplex	24	991	202	<u>992</u>	<u>202</u>	992	202	12	421	238	<u>423</u>	<u>236</u>	424	236
453.povray	24	<u>267</u>	<u>477</u>	270	473	267	479	24	231	553	232	549	<u>231</u>	<u>552</u>
454.calculix	24	<u>441</u>	<u>449</u>	445	445	440	450	24	<u>441</u>	<u>449</u>	440	450	444	446
459.GemsFDTD	24	1385	184	<u>1385</u>	<u>184</u>	1384	184	24	1385	184	<u>1385</u>	<u>184</u>	1384	184
465.tonto	24	634	373	631	374	<u>633</u>	<u>373</u>	24	610	387	<u>611</u>	<u>387</u>	611	386
470.lbm	24	908	363	906	364	<u>907</u>	<u>364</u>	24	908	363	906	364	<u>907</u>	<u>364</u>
481.wrf	24	796	337	799	335	<u>797</u>	<u>336</u>	24	<u>791</u>	<u>339</u>	789	340	792	339
482.sphinx3	24	1518	308	1522	307	<u>1519</u>	<u>308</u>	24	1518	308	1522	307	<u>1519</u>	<u>308</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /home/cpu2006/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
running on localhost.localdomain Fri Jun 15 21:52:47 2012

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp_rate2006 = 331

BladeSymphony BS520A (Intel Xeon E5-2440)

SPECfp_rate_base2006 = 322

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jun-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) CPU E5-2440 0 @ 2.40GHz
 2 "physical id"s (chips)
 24 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores      : 6
siblings       : 12
physical 0:    cores 0 1 2 3 4 5
physical 1:    cores 0 1 2 3 4 5
cache size     : 15360 KB
```

From /proc/meminfo

```
MemTotal:      99044504 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

/usr/bin/lsb_release -d

```
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

From /etc/*release* /etc/*version*

```
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux localhost.localdomain 2.6.32-220.4.2.el6.x86_64 #1 SMP Mon Feb 6
16:39:28 EST 2012 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jun 15 21:45

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 3



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp_rate2006 = 331

BladeSymphony BS520A (Intel Xeon E5-2440)

SPECfp_rate_base2006 = 322

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jun-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

General Notes (Continued)

numactl --interleave=all runspec <etc>

HITACHI BladeSymphony BS520A and HITACHI Compute Blade 520A are electronically equivalent. The results have been measured on a HITACHI BladeSymphony BS520A.

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp_rate2006 = 331

BladeSymphony BS520A (Intel Xeon E5-2440)

SPECfp_rate_base2006 = 322

CPU2006 license: 35

Test date: Jun-2012

Test sponsor: HITACHI

Hardware Availability: Jun-2012

Tested by: HITACHI

Software Availability: Feb-2012

Base Optimization Flags (Continued)

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp_rate2006 = 331

BladeSymphony BS520A (Intel Xeon E5-2440)

SPECfp_rate_base2006 = 322

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jun-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp_rate2006 = 331

BladeSymphony BS520A (Intel Xeon E5-2440)

SPECfp_rate_base2006 = 322

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jun-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 09:35:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 July 2012.