



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]2006 = 58.3

PowerEdge T320 (Intel Xeon E5-2430, 2.20 GHz)

SPECfp_base2006 = 56.1

CPU2006 license: 55


Test date: May-2012

Test sponsor: Dell Inc.

Hardware Availability: Jun-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

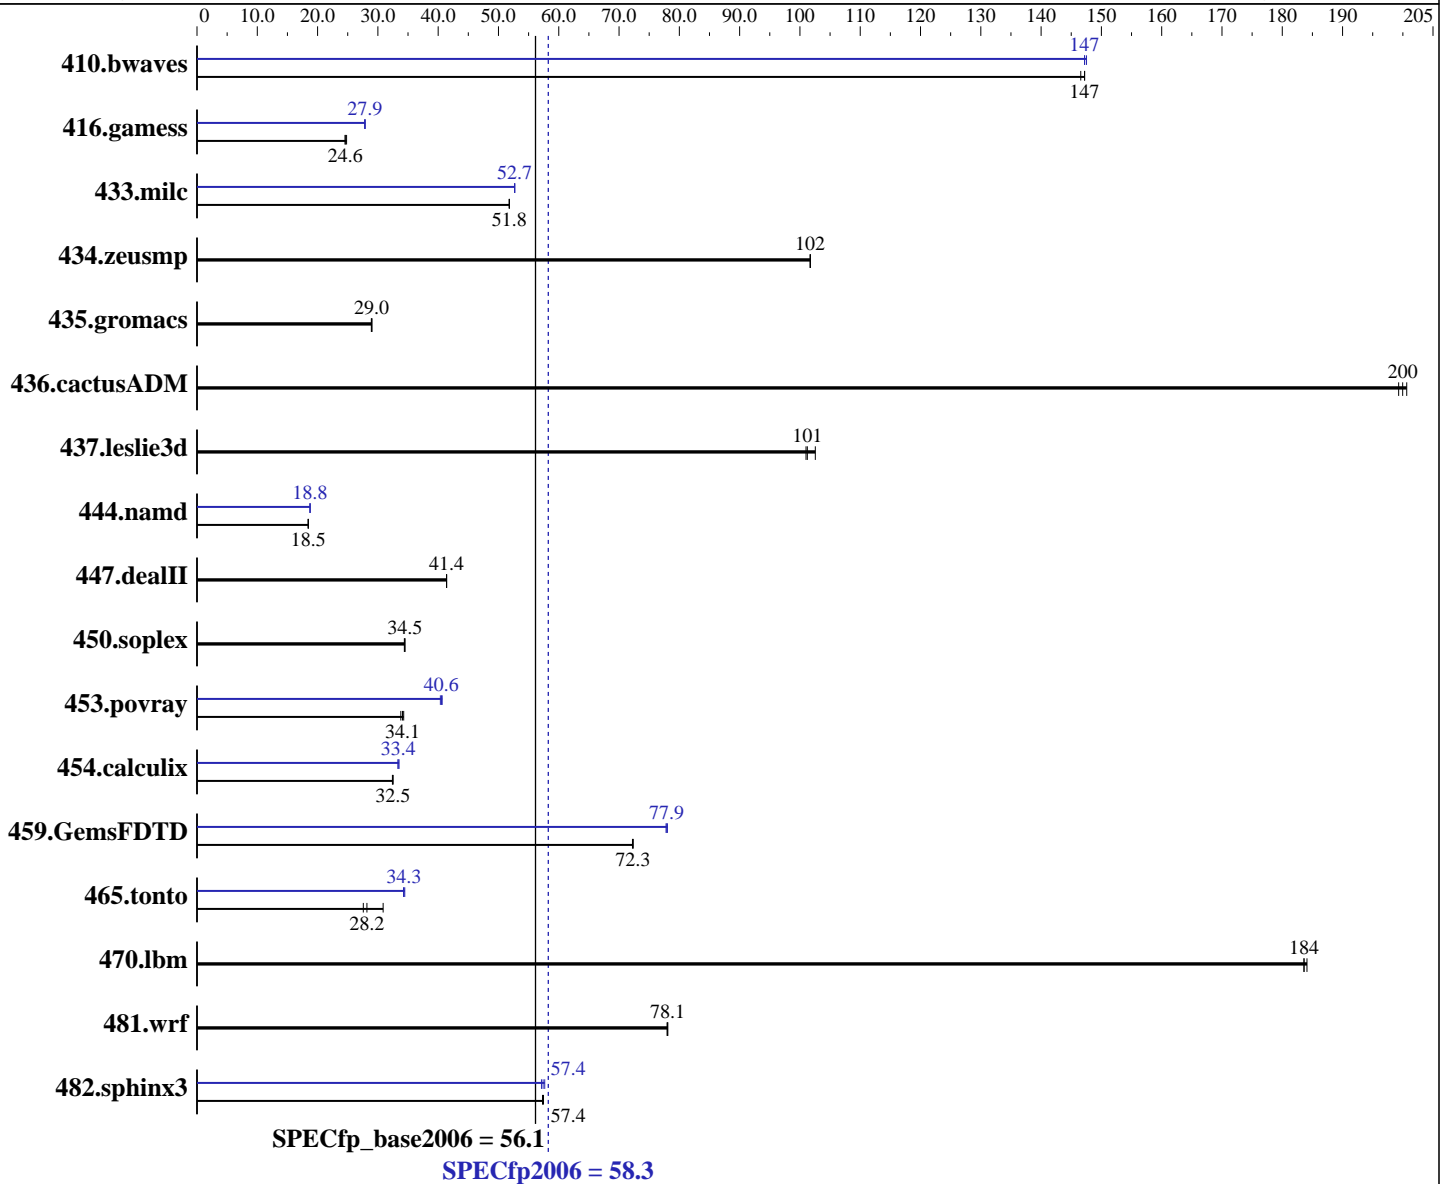

Hardware

CPU Name: Intel Xeon E5-2430
 CPU Characteristics: Intel Turbo Boost Technology up to 2.70 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 SP2(x86_64)
 3.0.13-0.27-default
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 58.3

PowerEdge T320 (Intel Xeon E5-2430, 2.20 GHz)

SPECfp_base2006 = 56.1

CPU2006 license: 55

Test date: May-2012

Test sponsor: Dell Inc.

Hardware Availability: Jun-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

L3 Cache: 15 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (6 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)
Disk Subsystem: 1 x 300 GB 15000 RPM SAS
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	92.7	147	92.3	147	92.3	147	92.3	147	92.3	147	92.1	148
416.gamess	789	24.8	797	24.6	796	24.6	702	27.9	704	27.8	703	27.9
433.milc	177	51.8	177	51.8	177	51.8	174	52.7	174	52.7	174	52.7
434.zeusmp	89.5	102	89.5	102	89.5	102	89.5	102	89.5	102	89.5	102
435.gromacs	246	29.0	246	29.0	247	28.9	246	29.0	246	29.0	247	28.9
436.cactusADM	59.6	201	60.0	199	59.8	200	59.6	201	60.0	199	59.8	200
437.leslie3d	91.7	103	93.1	101	92.9	101	91.7	103	93.1	101	92.9	101
444.namd	434	18.5	435	18.4	435	18.5	427	18.8	427	18.8	428	18.7
447.dealII	276	41.4	276	41.4	276	41.4	276	41.4	276	41.4	276	41.4
450.soplex	242	34.5	243	34.4	242	34.5	242	34.5	243	34.4	242	34.5
453.povray	157	33.8	155	34.3	156	34.1	131	40.7	131	40.6	132	40.4
454.calculix	254	32.5	254	32.5	255	32.4	247	33.4	246	33.5	248	33.3
459.GemsFDTD	147	72.2	147	72.3	147	72.3	136	78.0	136	77.9	136	77.8
465.tonto	349	28.2	319	30.9	357	27.6	287	34.3	286	34.5	287	34.3
470.lbm	74.8	184	74.6	184	74.8	184	74.8	184	74.6	184	74.8	184
481.wrf	143	78.0	143	78.1	143	78.1	143	78.0	143	78.1	143	78.1
482.sphinx3	339	57.5	340	57.3	340	57.4	338	57.7	340	57.4	341	57.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

CPU Power Management set to Maximum Performance
Memory Frequency set to Maximum Performance
Turbo Boost set to Enabled
C States/C1E set to Enabled
Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
running on linux-sxkz Mon May 28 16:29:11 2012

This section contains SUT (System Under Test) info as seen by

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 58.3

PowerEdge T320 (Intel Xeon E5-2430, 2.20 GHz)

SPECfp_base2006 = 56.1

CPU2006 license: 55

Test date: May-2012

Test sponsor: Dell Inc.

Hardware Availability: Jun-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Platform Notes (Continued)

some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2430 0 @ 2.20GHz
 1 "physical id"s (chips)
 12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 6
  siblings  : 12
  physical 0: cores 0 1 2 3 4 5
  cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      49348896 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 2
```

```
uname -a:
Linux linux-sxkz 3.0.13-0.27-default #1 SMP Wed Feb 15 13:33:49 UTC 2012
(d73692b) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 24 09:42 last=S
```

```
SPEC is set to: /root/CPU2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext3  271G   40G  218G  16% /
```

Additional information from dmidecode:

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64"
OMP_NUM_THREADS = "6"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 58.3

PowerEdge T320 (Intel Xeon E5-2430, 2.20 GHz)

SPECfp_base2006 = 56.1

CPU2006 license: 55

Test date: May-2012

Test sponsor: Dell Inc.

Hardware Availability: Jun-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

General Notes (Continued)

memory using RHEL5.5
 Transparent Huge Pages disabled with:
 echo never > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1> /proc/sys/vm/drop_caches
 The Dell PowerEdge T320 and
 the Bull NovaScale T820 F3 models are electronically equivalent.
 The results have been measured on a Dell PowerEdge T320 model

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.deallI: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 58.3

PowerEdge T320 (Intel Xeon E5-2430, 2.20 GHz)

SPECfp_base2006 = 56.1

CPU2006 license: 55

Test date: May-2012

Test sponsor: Dell Inc.

Hardware Availability: Jun-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 58.3

PowerEdge T320 (Intel Xeon E5-2430, 2.20 GHz)

SPECfp_base2006 = 56.1

CPU2006 license: 55

Test date: May-2012

Test sponsor: Dell Inc.

Hardware Availability: Jun-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.html>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 58.3

PowerEdge T320 (Intel Xeon E5-2430, 2.20 GHz)

SPECfp_base2006 = 56.1

CPU2006 license: 55

Test date: May-2012

Test sponsor: Dell Inc.

Hardware Availability: Jun-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 12:29:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 July 2012.