



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]2006 = 44.7

PowerEdge R715 (AMD Opteron 6284 SE, 2.70 GHz)

SPECfp_base2006 = 37.0

CPU2006 license: 55


Test date: Jul-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2011

Tested by: Dell Inc.

Software Availability: Jul-2011

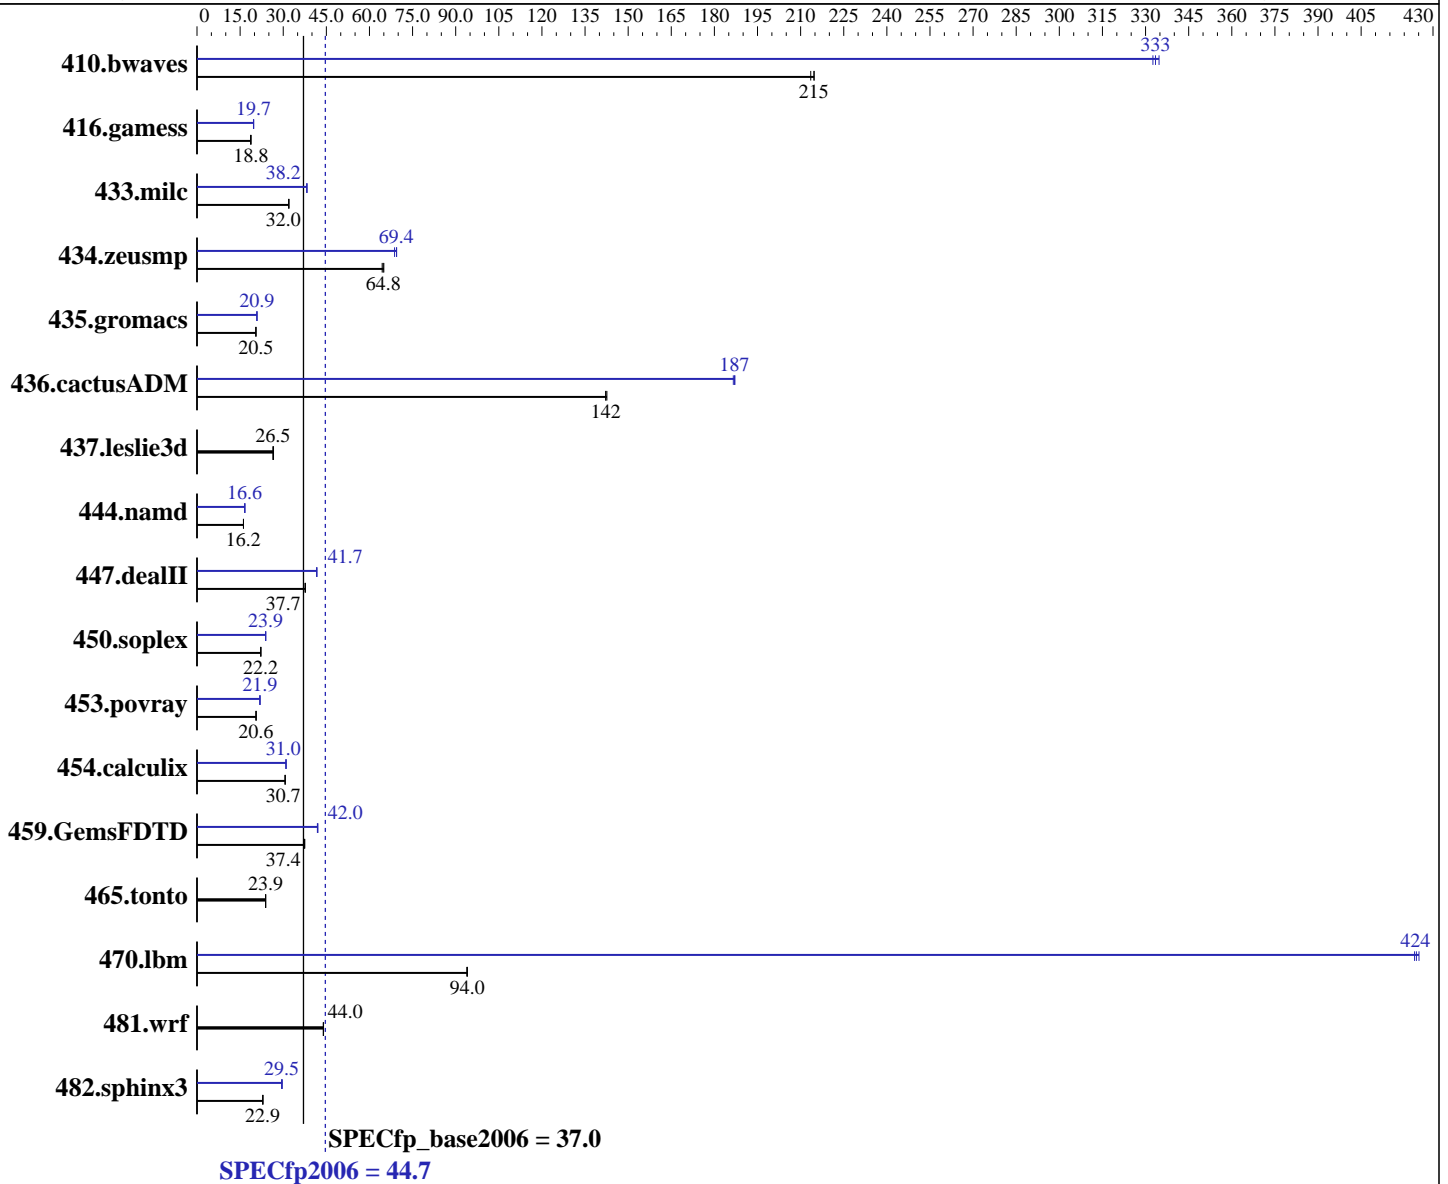

Hardware

CPU Name: AMD Opteron 6284 SE
 CPU Characteristics: AMD Turbo CORE technology up to 3.40 GHz
 CPU MHz: 2700
 FPU: Integrated
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip
 CPU(s) orderable: 1,2 chips

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86_64) 3.0.13-0.27-default
 Compiler: C/C++/Fortran: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 44.7

PowerEdge R715 (AMD Opteron 6284 SE, 2.70 GHz)

SPECfp_base2006 = 37.0

CPU2006 license: 55

Test date: Jul-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2011

Tested by: Dell Inc.

Software Availability: Jul-2011

Primary Cache: 512 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core

Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores

Other Cache: None

Memory: 64 GB (8 x 8 GB 2Rx4 PC3-12800R-11, ECC)

Disk Subsystem: 3 x 146 GB SAS, 15000 RPM

Other Hardware: None

Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<u>63.3</u>	<u>215</u>	63.3	215	63.6	214	40.6	335	40.9	333	<u>40.8</u>	<u>333</u>
416.gamess	<u>1043</u>	<u>18.8</u>	1050	18.6	1043	18.8	997	19.6	993	19.7	<u>994</u>	<u>19.7</u>
433.milc	288	31.9	287	32.0	<u>287</u>	<u>32.0</u>	240	38.2	<u>240</u>	<u>38.2</u>	240	38.2
434.zeusmp	<u>140</u>	<u>64.8</u>	141	64.4	140	65.0	<u>131</u>	<u>69.4</u>	131	69.5	132	68.7
435.gromacs	348	20.5	<u>348</u>	<u>20.5</u>	349	20.5	342	20.9	<u>342</u>	<u>20.9</u>	343	20.8
436.cactusADM	84.0	142	<u>84.0</u>	<u>142</u>	83.8	143	64.0	187	63.9	187	<u>63.9</u>	<u>187</u>
437.leslie3d	<u>355</u>	<u>26.5</u>	356	26.4	353	26.6	<u>355</u>	<u>26.5</u>	356	26.4	353	26.6
444.namd	496	16.2	496	16.2	<u>496</u>	<u>16.2</u>	482	16.6	<u>482</u>	<u>16.6</u>	482	16.6
447.dealII	304	37.6	<u>304</u>	<u>37.7</u>	303	37.7	<u>275</u>	<u>41.7</u>	274	41.7	275	41.6
450.soplex	376	22.2	375	22.2	<u>376</u>	<u>22.2</u>	<u>349</u>	<u>23.9</u>	349	23.9	349	23.9
453.povray	<u>259</u>	<u>20.6</u>	260	20.5	258	20.6	242	21.9	<u>243</u>	<u>21.9</u>	244	21.8
454.calculix	269	30.7	<u>269</u>	<u>30.7</u>	269	30.7	267	30.9	266	31.0	<u>266</u>	<u>31.0</u>
459.GemsFDTD	284	37.4	<u>283</u>	<u>37.4</u>	283	37.5	<u>253</u>	<u>42.0</u>	252	42.0	253	41.9
465.tonto	413	23.8	411	23.9	<u>412</u>	<u>23.9</u>	413	23.8	411	23.9	<u>412</u>	<u>23.9</u>
470.lbm	146	93.9	<u>146</u>	<u>94.0</u>	146	94.0	<u>32.4</u>	<u>424</u>	32.4	424	32.3	425
481.wrf	254	44.0	<u>254</u>	<u>44.0</u>	254	43.9	254	44.0	<u>254</u>	<u>44.0</u>	254	43.9
482.sphinx3	851	22.9	850	22.9	<u>851</u>	<u>22.9</u>	657	29.7	<u>660</u>	<u>29.5</u>	662	29.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 44.7

PowerEdge R715 (AMD Opteron 6284 SE, 2.70 GHz)

SPECfp_base2006 = 37.0

CPU2006 license: 55

Test date: Jul-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2011

Tested by: Dell Inc.

Software Availability: Jul-2011

Operating System Notes (Continued)

Set kernel/randomize_va_space=0 in /etc/sysctl.conf
cpuspeed stop was used to set the CPU frequency to its maximum.

Set vm/nr_hugepages=4000 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:

```
HUGETLB_LIMIT = "4000"
LD_LIBRARY_PATH = "/root/cpu2006/amd1104-speed-libs-revA/32:/root/cpu2006/amd1104-speed-libs-revA/64"
O64_OMP_AFFINITY_MAP = "0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23,24,25,26,27,28,29,30,31"
O64_OMP_SPIN_COUNT = "800000"
O64_OMP_SPIN_USER_LOCK = "true"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6220 chips + 64GB Memory using RHEL 6.1

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 44.7

PowerEdge R715 (AMD Opteron 6284 SE, 2.70 GHz)

SPECfp_base2006 = 37.0

CPU2006 license: 55

Test date: Jul-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2011

Tested by: Dell Inc.

Software Availability: Jul-2011

Base Portability Flags (Continued)

453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
 -fno-second-underscore
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-march=bdver1 -Ofast -HP:bdt=2m:heap=2m -apo -mso
 -OPT:alias=restricted -OPT:malloc_alg=2 -LNO:parallel_overhead=10000

C++ benchmarks:

-march=bdver1 -Ofast -static -CG:load_exe=0 -CG:p2align=0
 -INLINE:aggressive=on -HP:bdt=2m:heap=2m -D__OPEN64_FAST_SET

Fortran benchmarks:

-march=bdver1 -Ofast -LNO:blocking=off -LNO:fusion_peeling_limit=0
 -LNO:parallel_overhead=10000 -OPT:rsqrt=2 -OPT:unroll_size=256
 -HP:bdt=2m:heap=2m -apo

Benchmarks using both Fortran and C:

-march=bdver1 -Ofast -HP:bdt=2m:heap=2m -apo -mso
 -OPT:alias=restricted -OPT:malloc_alg=2 -LNO:parallel_overhead=10000
 -LNO:blocking=off -LNO:fusion_peeling_limit=0 -OPT:rsqrt=2
 -OPT:unroll_size=256

Peak Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

openc openf95



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 44.7

PowerEdge R715 (AMD Opteron 6284 SE, 2.70 GHz)

SPECfp_base2006 = 37.0

CPU2006 license: 55

Test date: Jul-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2011

Tested by: Dell Inc.

Software Availability: Jul-2011

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on
-HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive

470.lbm: -march=bdver1 -Ofast -mso -apo -CG:sse_cse_regs=0
-LNO:prefetch_ahead=4 -CG:locs_shallow_depth=1
-CG:cmp_peep=on -CG:compute_to=on -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
-OPT:alias=restricted -m3dnow -IPA:inline=off

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:loop_model_simd=on
-LNO:simd_rm_unity_remainder=on -OPT:malloc_alg=2
-CG:cmp_peep=on -CG:local_sched_alg=2 -CG:use_incdec=off
-INLINE:aggressive=on -WOPT:sib=on -HP

```

C++ benchmarks:

```

444.namd: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
-CG:local_sched_alg=2 -CG:load_exe=0 -OPT:unroll_size=256
-fno-exceptions -HP:bdt=2m:heap=2m

447.dealII: -march=bdver1 -Ofast -LNO:simd=0 -D__OPEN64_FAST_SET
-static -INLINE:aggressive=on -OPT:alias=disjoint
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 44.7

PowerEdge R715 (AMD Opteron 6284 SE, 2.70 GHz)

SPECfp_base2006 = 37.0

CPU2006 license: 55

Test date: Jul-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2011

Tested by: Dell Inc.

Software Availability: Jul-2011

Peak Optimization Flags (Continued)

450.soplex: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on -OPT:RO=1
 -OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
 -OPT:fold_unsigned_relops=on -fno-exceptions -CG:p2align=0
 -m32 -HP:bdt=2m:heap=2m -WOPT:sib=on

453.povray: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -CG:pre_local_sched=off
 -INLINE:aggressive=on -HP:bdt=2m:heap=2m -OPT:transform=2
 -OPT:alias=disjoint -WOPT:aggcm=0

Fortran benchmarks:

410.bwaves: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -apo -OPT:Ofast
 -OPT:treeheight=on -LNO:blocking=off -LNO:prefetch=2
 -LNO:pf2=0 -LNO:prefetch_ahead=3 -LNO:ignore_feedback=off
 -LNO:fu=4 -LNO:loop_model_simd=on
 -LNO:simd_rm_unity_remainder=on -WOPT:aggstr=0
 -HP:bdt=2m:heap=2m -CG:cmp_peep=on -CG:p2align=0

416.gamess: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
 -LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
 -OPT:unroll_times_max=2 -CG:local_sched_alg=1
 -HP:bdt=2m:heap=2m -WOPT:sib=on

434.zeusmp: -march=bdver1 -Ofast -apo -LNO:blocking=off
 -LNO:interchange=off -LNO:fusion_peeling_limit=0
 -OPT:treeheight=on -OPT:unroll_size=256 -CG:cmp_peep=on
 -CG:compute_to=on -GRA:prioritize_by_density=on
 -HP:bdt=2m:heap=2m

437.leslie3d: basepeak = yes

459.GemsFDTD: -march=bdver1 -Ofast -OPT:unroll_size=0 -LNO:fission=2
 -CG:load_exe=0 -CG:local_sched_alg=2 -HP -apo

465.tonto: basepeak = yes

Benchmarks using both Fortran and C:

435.gromacs: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2
 -HP:bdt=2m:heap=2m

436.cactusADM: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:blocking=off
 -LNO:prefetch=2 -HP:bdt=2m:heap=2m -CG:locs_shallow_depth=1

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 44.7

PowerEdge R715 (AMD Opteron 6284 SE, 2.70 GHz)

SPECfp_base2006 = 37.0

CPU2006 license: 55

Test date: Jul-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2011

Tested by: Dell Inc.

Software Availability: Jul-2011

Peak Optimization Flags (Continued)

436.cactusADM (continued):

-CG:load_exe=0 -WOPT:sib=on -apo

454.calculix: -march=bdver1 -Ofast -OPT:unroll_size=256

-GRA:optimize_boundary=on -HP:bdt=2m:heap=2m

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-speed-revA-I.html>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA-I.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-speed-revA-I.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA-I.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 11:22:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 31 July 2012.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 7