



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®_rate2006 = 195

PowerEdge R415 (AMD Opteron 4276 HE, 2.60 GHz)

SPECfp_rate_base2006 = 178

CPU2006 license: 55


Test date: Jul-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2011

Tested by: Dell Inc.

Software Availability: Jul-2011

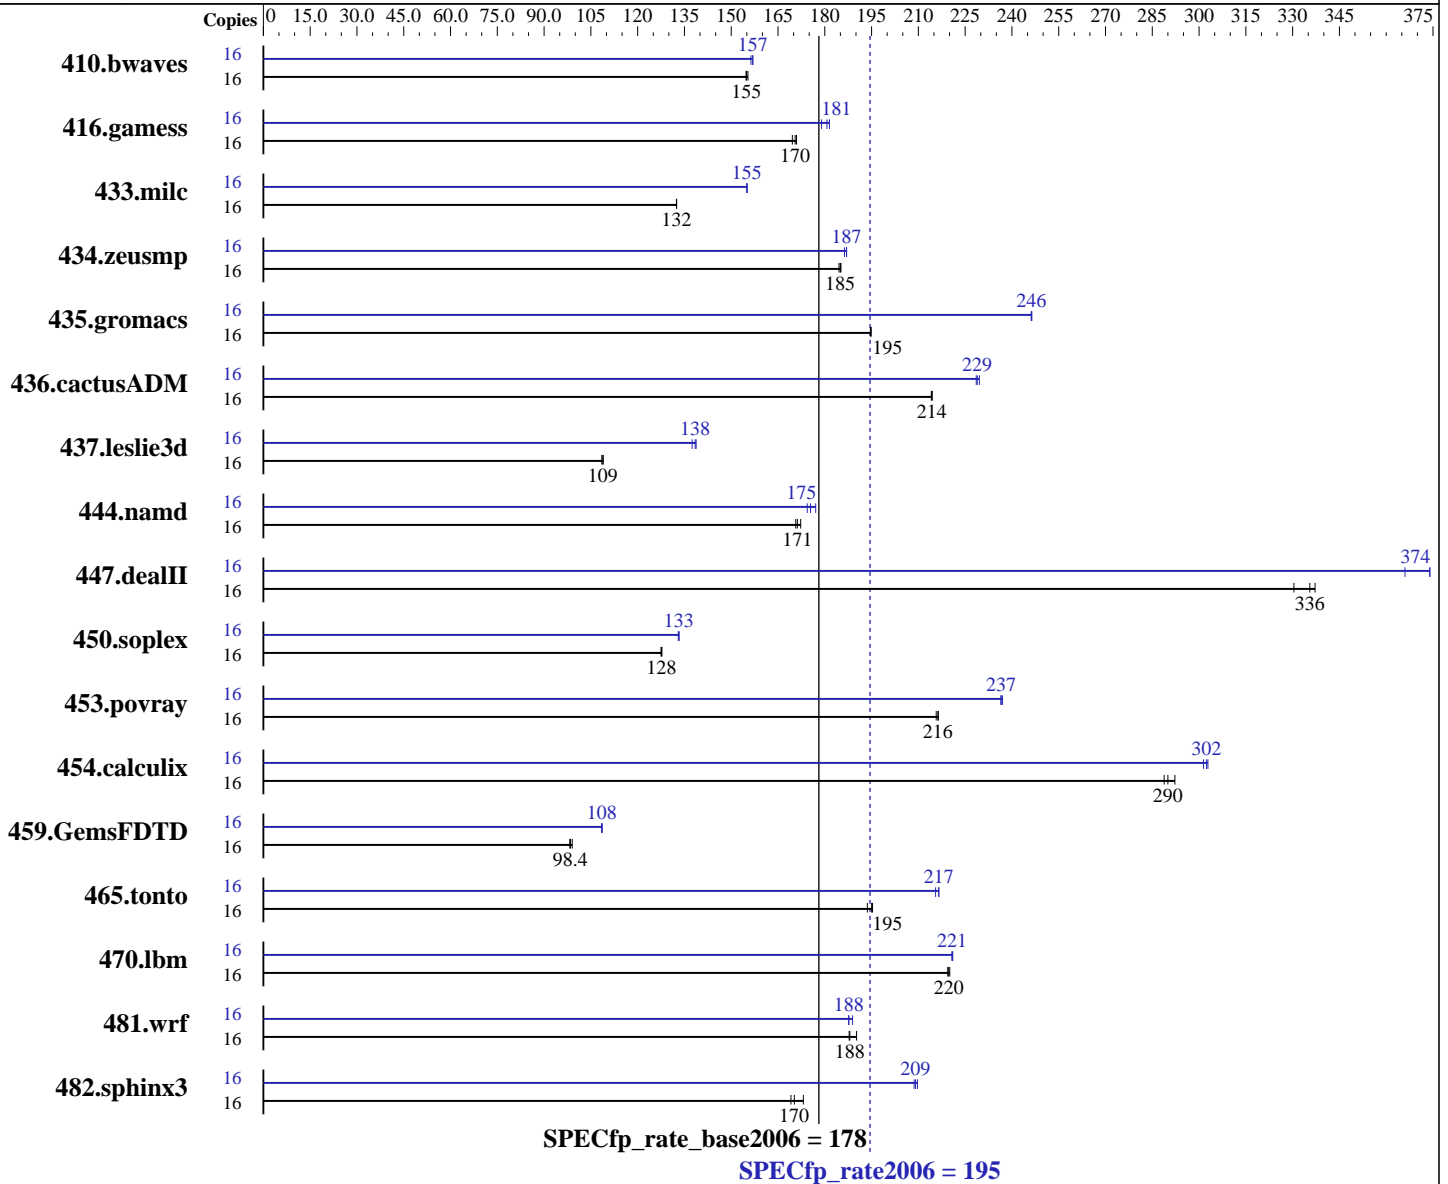

Hardware

CPU Name: AMD Opteron 4276 HE
 CPU Characteristics: AMD Turbo CORE technology up to 3.60 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip
 CPU(s) orderable: 1,2 chips

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86_64) 3.0.13-0.27-default
 Compiler: C/C++/Fortran: Version 4.5.1 of x86 Open64 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 195

PowerEdge R415 (AMD Opteron 4276 HE, 2.60 GHz)

SPECfp_rate_base2006 = 178

CPU2006 license: 55

Test date: Jul-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2011

Tested by: Dell Inc.

Software Availability: Jul-2011

Primary Cache: 256 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core

Secondary Cache: 8 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 8 MB I+D on chip per chip

Other Cache: None

Memory: 32 GB (4 x 8 GB 2Rx4 PC3-12800R-11, ECC)

Disk Subsystem: 1 x 250 GB SATA, 7200 RPM

Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1405	155	1400	155	1404	155	16	1391	156	1385	157	1386	157
416.gamess	16	1847	170	1833	171	1838	170	16	1726	182	1751	179	1734	181
433.milc	16	1109	132	1109	132	1108	133	16	947	155	947	155	948	155
434.zeusmp	16	787	185	786	185	789	185	16	779	187	781	186	779	187
435.gromacs	16	586	195	587	195	587	195	16	464	246	464	246	464	246
436.cactusADM	16	892	214	892	214	893	214	16	835	229	837	229	833	230
437.leslie3d	16	1381	109	1381	109	1386	108	16	1086	138	1094	137	1084	139
444.namd	16	745	172	752	171	750	171	16	732	175	736	174	725	177
447.dealII	16	554	330	546	336	543	337	16	500	366	489	374	489	374
450.soplex	16	1047	127	1045	128	1045	128	16	1003	133	1002	133	1001	133
453.povray	16	394	216	395	216	393	216	16	360	236	359	237	360	237
454.calculix	16	452	292	455	290	457	289	16	438	301	437	302	436	303
459.GemsFDTD	16	1724	98.4	1728	98.2	1715	99.0	16	1565	108	1563	109	1566	108
465.tonto	16	807	195	813	194	806	195	16	727	217	727	217	731	216
470.lbm	16	999	220	1002	219	1000	220	16	995	221	996	221	995	221
481.wrf	16	951	188	952	188	940	190	16	952	188	946	189	952	188
482.sphinx3	16	1801	173	1844	169	1832	170	16	1495	209	1487	210	1491	209

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Transparent huge pages were enabled for this run (OS default)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 195

PowerEdge R415 (AMD Opteron 4276 HE, 2.60 GHz)

SPECfp_rate_base2006 = 178

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jul-2012
Hardware Availability: Nov-2011
Software Availability: Jul-2011

Operating System Notes (Continued)

Huge pages were not configured for this run.

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/cpu2006/amd1104-rate-libs-revC/32:/root/cpu2006/amd1104-rate-libs-revC/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6274 chips + 64GB Memory using RHEL 6.1

Base Compiler Invocation

C benchmarks:
 opencc

C++ benchmarks:
 openCC

Fortran benchmarks:
 openf95

Benchmarks using both Fortran and C:
 opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
 -fno-second-underscore

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 195

PowerEdge R415 (AMD Opteron 4276 HE, 2.60 GHz)

SPECfp_rate_base2006 = 178

CPU2006 license: 55

Test date: Jul-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2011

Tested by: Dell Inc.

Software Availability: Jul-2011

Base Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso

C++ benchmarks:

-march=bdver1 -Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1
-INLINE:aggressive=on -HP:bd=2m:heap=2m -D__OPEN64_FAST_SET

Fortran benchmarks:

-march=bdver1 -Ofast -LNO:blocking=off -OPT:rsqrt=2
-OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso

Benchmarks using both Fortran and C:

-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso -LNO:blocking=off
-OPT:rsqrt=2 -OPT:unroll_size=256

Peak Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 195

PowerEdge R415 (AMD Opteron 4276 HE, 2.60 GHz)

SPECfp_rate_base2006 = 178

CPU2006 license: 55

Test date: Jul-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2011

Tested by: Dell Inc.

Software Availability: Jul-2011

Peak Portability Flags (Continued)

437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
 -fno-second-underscore
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on
 -HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200
 -OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso

470.lbm: -march=bdver1 -Ofast -CG:cmp_peep=on
 -OPT:unroll_times_max=8 -OPT:unroll_size=256
 -OPT:unroll_level=2 -OPT:keep_ext=on -HP:bdt=2m:heap=2m
 -IPA:plimit=8000 -IPA:small_pu=100 -mso

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=1000
 -OPT:malloc_alg=2 -CG:cmp_peep=on -CG:local_sched_alg=2
 -CG:p2align=0 -INLINE:aggressive=on -LNO:prefetch=2
 -LNO:prefetch_ahead=4 -mso

C++ benchmarks:

444.namd: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=3000
 -LNO:ignore_feedback=off -CG:local_sched_alg=2
 -CG:load_exe=0 -OPT:unroll_size=256 -fno-exceptions
 -HP:bdt=2m:heap=2m

447.dealIII: -march=bdver1 -Ofast -D__OPEN64_FAST_SET -static
 -INLINE:aggressive=on -LNO:opt=0 -LNO:simd=0
 -fno-emit-exceptions -m32 -OPT:unroll_times_max=8
 -OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
 -GRA:unspill=on -CG:cmp_peep=on -CG:movext_icmp=off
 -TENV:frame_pointer=off

450.soplex: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -LNO:ignore_feedback=off
 -INLINE:aggressive=on -OPT:RO=1 -OPT:IEEE_arith=3
 -OPT:IEEE_NaN_Inf=off -OPT:fold_unsigned_relops=on

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 195

PowerEdge R415 (AMD Opteron 4276 HE, 2.60 GHz)

SPECfp_rate_base2006 = 178

CPU2006 license: 55

Test date: Jul-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2011

Tested by: Dell Inc.

Software Availability: Jul-2011

Peak Optimization Flags (Continued)

450.soplex (continued):

-fno-exceptions -CG:p2align=0 -m32 -HP:bdt=2m:heap=2m
-WOPT:sib=on

453.povray:

-march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:pre_local_sched=off
-CG:p2align=0 -CG:p2align_split=on -CG:dsched=on
-INLINE:aggressive=on -HP:bd=2m:heap=2m -OPT:transform=2
-OPT:alias=disjoint -WOPT:aggcm=0

Fortran benchmarks:

410.bwaves:

-march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:Ofast -OPT:treeheight=on
-LNO:blocking=off -LNO:ignore_feedback=off -LNO:fu=4
-LNO:loop_model_simd=on -LNO:simd_rm_unity_remainder=on
-WOPT:aggstr=0 -HP:bdt=2m:heap=2m -CG:cmp_peep=on

416.gamess:

-march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-OPT:unroll_times_max=2 -CG:local_sched_alg=1
-HP:bdt=2m:heap=2m -WOPT:sib=on

434.zeusmp:

-march=bdver1 -Ofast -LNO:blocking=off -LNO:interchange=off
-IPA:plimit=1500 -HP:bdt=2m:heap=2m

437.leslie3d:

-march=bdver1 -Ofast -CG:pre_minreg_level=2 -LNO:simd=0
-LNO:fusion=2 -HP:bdt=2m:heap=2m -mso

459.GemsFDTD:

-march=bdver1 -Ofast -IPA:plimit=1500 -OPT:unroll_size=0
-LNO:fission=2 -CG:load_exe=0 -CG:local_sched_alg=2 -HP

465.tonto:

-march=bdver1 -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525
-HP:bdt=2m:heap=2m

Benchmarks using both Fortran and C:

435.gromacs:

-march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2
-HP:bdt=2m:heap=2m -CG:local_sched_alg=2 -GRA:unspill=ON
-CG:load_exe=3 -LNO:simd=3

436.cactusADM:

-march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:blocking=off
-LNO:prefetch=2 -HP -CG:locs_shallow_depth=1 -CG:load_exe=0
-CG:dsched=on -WOPT:sib=on

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 195

PowerEdge R415 (AMD Opteron 4276 HE, 2.60 GHz)

SPECfp_rate_base2006 = 178

CPU2006 license: 55

Test date: Jul-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2011

Tested by: Dell Inc.

Software Availability: Jul-2011

Peak Optimization Flags (Continued)

454.calculix: -march=bdver1 -Ofast -OPT:unroll_size=256
-GRA:optimize_boundary=on -CG:dsched=on -HP:bdt=2m:heap=2m

481.wrf: -march=bdver1 -Ofast -LNO:blocking=off -LANG:copyinout=off
-IPA:callee_limit=5000 -GRA:prioritize_by_density=on
-CG:load_exe=1 -HP -WOPT:sib=on

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA-I.html>
<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA-I.xml>
<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 11:46:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 July 2012.