



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®_rate2006 = 680

ProLiant BL685c G7
AMD Opteron 6238

SPECfp_rate_base2006 = 633

CPU2006 license: 3


Test date: Jul-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Dec-2011

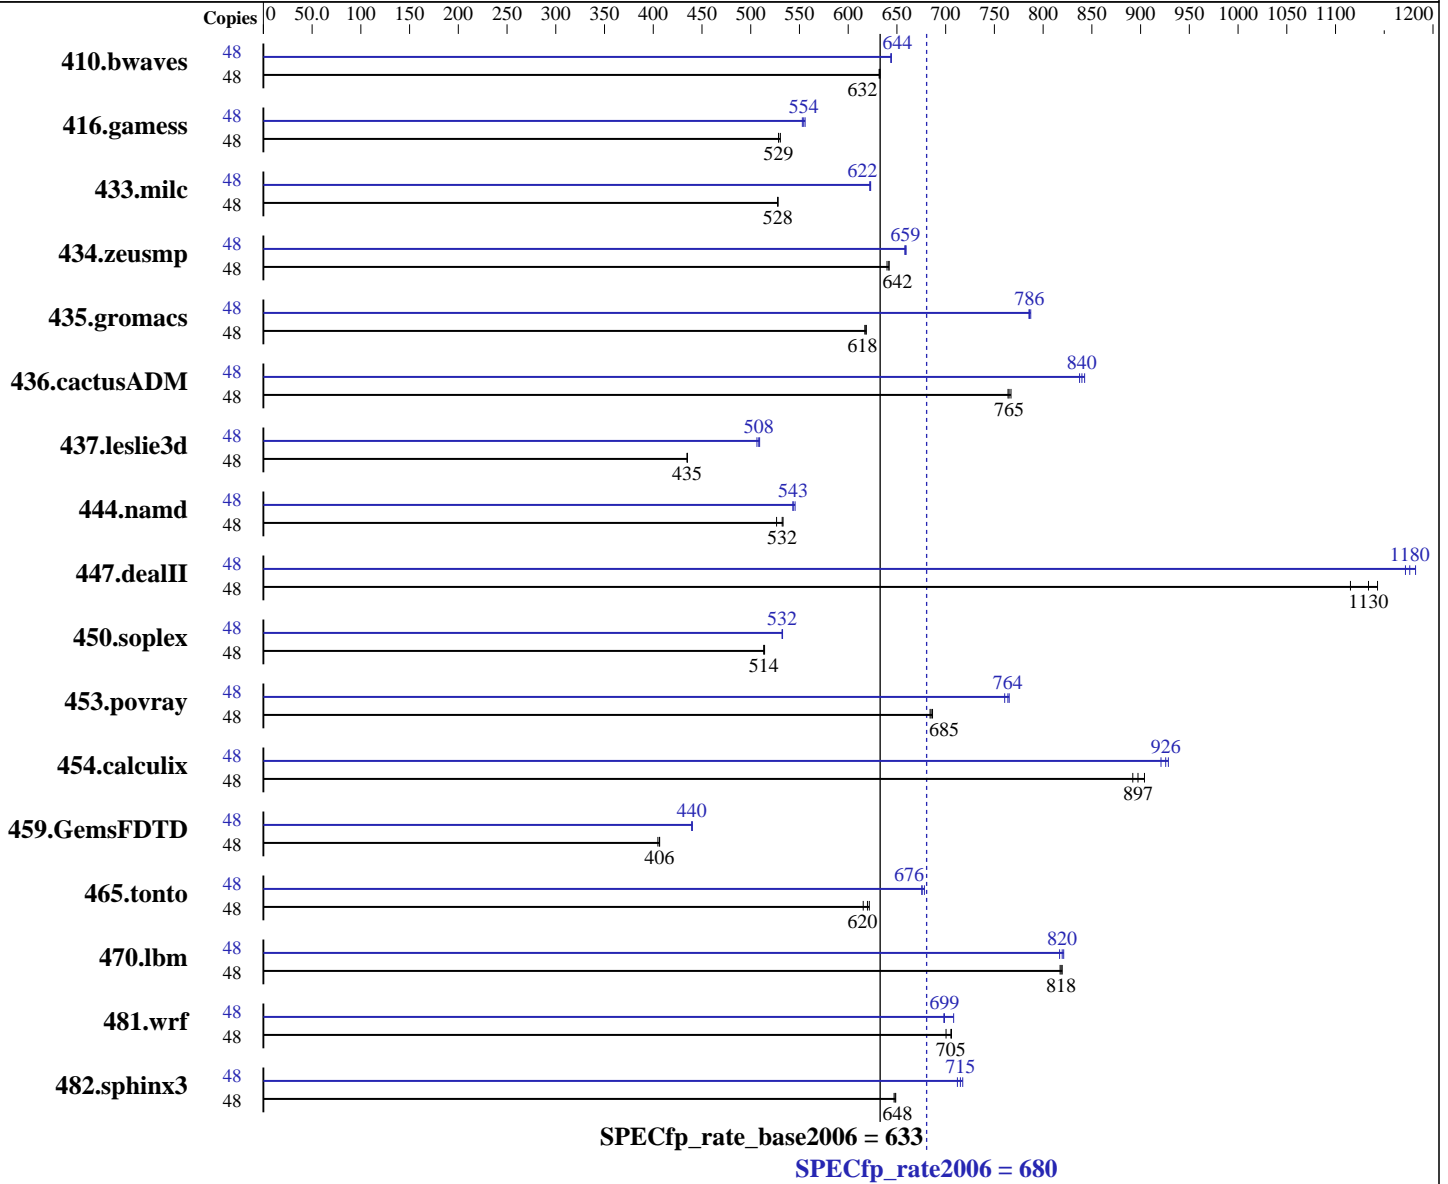

Hardware

CPU Name: AMD Opteron 6238
 CPU Characteristics: AMD Turbo CORE technology up to 3.20 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 48 cores, 4 chips, 12 cores/chip
 CPU(s) orderable: 2,4 chips

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2, Kernel 2.6.32-220.el6.x86_64
 Compiler: C/C++/Fortran: Version 4.5.1 of x86 Open64 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = **680**

ProLiant BL685c G7
AMD Opteron 6238

SPECfp_rate_base2006 = **633**

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jul-2012
Hardware Availability: Jun-2012
Software Availability: Dec-2011

Primary Cache: 384 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core
Secondary Cache: 12 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 6 cores
Other Cache: None
Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 146 GB SAS, 10 K
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	1033	632	1031	633	1031	632	48	1013	644	1013	644	1013	644
416.gamess	48	1778	529	1772	530	1778	529	48	1695	554	1691	556	1700	553
433.milc	48	835	528	835	528	835	528	48	708	622	707	623	708	622
434.zeusmp	48	683	640	680	642	681	642	48	662	659	664	658	663	659
435.gromacs	48	555	618	555	617	554	619	48	436	786	436	785	435	787
436.cactusADM	48	750	765	751	764	748	767	48	681	843	685	837	683	840
437.leslie3d	48	1037	435	1038	435	1038	435	48	888	508	886	509	891	506
444.namd	48	723	532	722	533	731	527	48	708	543	706	546	708	543
447.dealII	48	484	1130	492	1120	480	1140	48	469	1170	465	1180	467	1180
450.soplex	48	779	514	780	513	778	514	48	752	532	752	532	752	533
453.povray	48	372	687	373	684	373	685	48	334	764	334	765	336	761
454.calculix	48	444	892	438	904	441	897	48	430	921	428	926	426	929
459.GemsFDTD	48	1253	407	1254	406	1258	405	48	1158	440	1159	440	1157	440
465.tonto	48	760	622	767	615	762	620	48	699	676	696	678	699	676
470.lbm	48	806	818	805	820	807	817	48	807	817	805	820	803	821
481.wrf	48	760	705	759	706	766	700	48	768	698	757	708	767	699
482.sphinx3	48	1446	647	1442	649	1443	648	48	1304	718	1308	715	1314	712

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Transparent hugepage disabled: "echo never > /sys/kernel/mm/redhat_transparent_hugepage/enabled" before the run.
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 680

ProLiant BL685c G7
AMD Opteron 6238

SPECfp_rate_base2006 = 633

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jul-2012
Hardware Availability: Jun-2012
Software Availability: Dec-2011

Operating System Notes (Continued)

```
Set vm/nr_hugepages=43008 in /etc/sysctl.conf
"nodev /mnt/hugepages hugetlbfs defaults 0 0" set in /etc/fstab
```

Platform Notes

BIOS Configuration:

```
HP Power Profile - Maximum Performance
Thermal Configuration - Maximum Cooling
Sysinfo program /cpu2006/Docs/sysinfo-rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ bb9c007959452bf0f152f4fdd865dbe3
running on bl685c-g7-jfb Thu Jul 26 00:34:10 2012
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD Opteron(TM) Processor 6238
 4 "physical id"s (chips)
 48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 6
  siblings  : 12
  physical 0: cores 0 1 2 3 4 5
  physical 1: cores 0 1 2 3 4 5
  physical 2: cores 0 1 2 3 4 5
  physical 3: cores 0 1 2 3 4 5
cache size : 2048 KB
```

From /proc/meminfo

```
MemTotal:      529226632 kB
HugePages_Total: 43008
Hugepagesize:   2048 kB
```

/usr/bin/lsc_release -d

```
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

From /etc/*release* /etc/*version*

```
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux bl685c-g7-jfb 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 25 09:43
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 680

ProLiant BL685c G7
AMD Opteron 6238

SPECfp_rate_base2006 = 633

CPU2006 license: 3

Test date: Jul-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Dec-2011

Platform Notes (Continued)

SPEC is set to: /cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	ext4	133G	8.6G	118G	7%	/

Additional information from dmidecode:

BIOS HP A20 03/19/2012

Memory:

32x Not Specified Not Specified 16 GB 1600 MHz 2 rank

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "896"

LD_LIBRARY_PATH = "/cpu2006/amd1104-rate-libs-revC/32:/cpu2006/amd1104-rate-libs-revC/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6274 chips + 64GB Memory using RHEL 6.1

Base Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

openc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64

436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 680

ProLiant BL685c G7
AMD Opteron 6238

SPECfp_rate_base2006 = 633

CPU2006 license: 3

Test date: Jul-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Dec-2011

Base Portability Flags (Continued)

```

447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
        -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso

```

C++ benchmarks:

```

-march=bdver1 -Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1
-INLINE:aggressive=on -HP:bd=2m:heap=2m -D__OPEN64_FAST_SET

```

Fortran benchmarks:

```

-march=bdver1 -Ofast -LNO:blocking=off -OPT:rsqrt=2
-OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso

```

Benchmarks using both Fortran and C:

```

-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso -LNO:blocking=off
-OPT:rsqrt=2 -OPT:unroll_size=256

```

Peak Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

openc openf95



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 680

ProLiant BL685c G7
AMD Opteron 6238

SPECfp_rate_base2006 = 633

CPU2006 license: 3

Test date: Jul-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Dec-2011

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on
-HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso

470.lbm: -march=bdver1 -Ofast -CG:cmp_peep=on
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -HP:bdt=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=1000
-OPT:malloc_alg=2 -CG:cmp_peep=on -CG:local_sched_alg=2
-CG:p2align=0 -INLINE:aggressive=on -LNO:prefetch=2
-LNO:prefetch_ahead=4 -mso

```

C++ benchmarks:

```

444.namd: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=3000
-LNO:ignore_feedback=off -CG:local_sched_alg=2
-CG:load_exe=0 -OPT:unroll_size=256 -fno-exceptions
-HP:bdt=2m:heap=2m

447.dealIII: -march=bdver1 -Ofast -D__OPEN64_FAST_SET -static
-INLINE:aggressive=on -LNO:opt=0 -LNO:simd=0
-fno-emit-exceptions -m32 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
-GRA:unspill=on -CG:cmp_peep=on -CG:movext_icmp=off

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 680

ProLiant BL685c G7
AMD Opteron 6238

SPECfp_rate_base2006 = 633

CPU2006 license: 3

Test date: Jul-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

447.dealIII (continued):

-TENV:frame_pointer=off

450.soplex:

-march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:ignore_feedback=off
-INLINE:aggressive=on -OPT:RO=1 -OPT:IEEE_arith=3
-OPT:IEEE_NaN_Inf=off -OPT:fold_unsigned_relops=on
-fno-exceptions -CG:p2align=0 -m32 -HP:bdt=2m:heap=2m
-WOPT:sib=on

453.povray:

-march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:pre_local_sched=off
-CG:p2align=0 -CG:p2align_split=on -CG:dsched=on
-INLINE:aggressive=on -HP:bd=2m:heap=2m -OPT:transform=2
-OPT:alias=disjoint -WOPT:aggcm=0

Fortran benchmarks:

410.bwaves:

-march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:Ofast -OPT:treeheight=on
-LNO:blocking=off -LNO:ignore_feedback=off -LNO:fu=4
-LNO:loop_model_simd=on -LNO:simd_rm_unity_remainder=on
-WOPT:aggstr=0 -HP:bdt=2m:heap=2m -CG:cmp_peep=on

416.gamess:

-march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-OPT:unroll_times_max=2 -CG:local_sched_alg=1
-HP:bdt=2m:heap=2m -WOPT:sib=on

434.zeusmp:

-march=bdver1 -Ofast -LNO:blocking=off -LNO:interchange=off
-IPA:plimit=1500 -HP:bdt=2m:heap=2m

437.leslie3d:

-march=bdver1 -Ofast -CG:pre_minreg_level=2 -LNO:simd=0
-LNO:fusion=2 -HP:bdt=2m:heap=2m -mso

459.GemsFDTD:

-march=bdver1 -Ofast -IPA:plimit=1500 -OPT:unroll_size=0
-LNO:fission=2 -CG:load_exe=0 -CG:local_sched_alg=2 -HP

465.tonto:

-march=bdver1 -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525
-HP:bdt=2m:heap=2m

Benchmarks using both Fortran and C:

435.gromacs:

-march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2
-HP:bdt=2m:heap=2m -CG:local_sched_alg=2 -GRA:unspill=ON
-CG:load_exe=3 -LNO:simd=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL685c G7
AMD Opteron 6238

SPECfp_rate2006 = 680

SPECfp_rate_base2006 = 633

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Jul-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

436.cactusADM: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:blocking=off
-LNO:prefetch=2 -HP -CG:locs_shallow_depth=1 -CG:load_exe=0
-CG:dsched=on -WOPT:sib=on

454.calculix: -march=bdver1 -Ofast -OPT:unroll_size=256
-GRA:optimize_boundary=on -CG:dsched=on -HP:bdt=2m:heap=2m

481.wrf: -march=bdver1 -Ofast -LNO:blocking=off -LANG:copyinout=off
-IPA:callee_limit=5000 -GRA:prioritize_by_density=on
-CG:load_exe=1 -HP -WOPT:sib=on

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-AMD-V1.2-A.20120814.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-AMD-V1.2-A.20120814.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 11:57:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 August 2012.