



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®2006 = 34.6

IBM System x3630 M4 (Intel Pentium 1403)

SPECint_base2006 = 33.0

CPU2006 license: 11


Test date: Jul-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

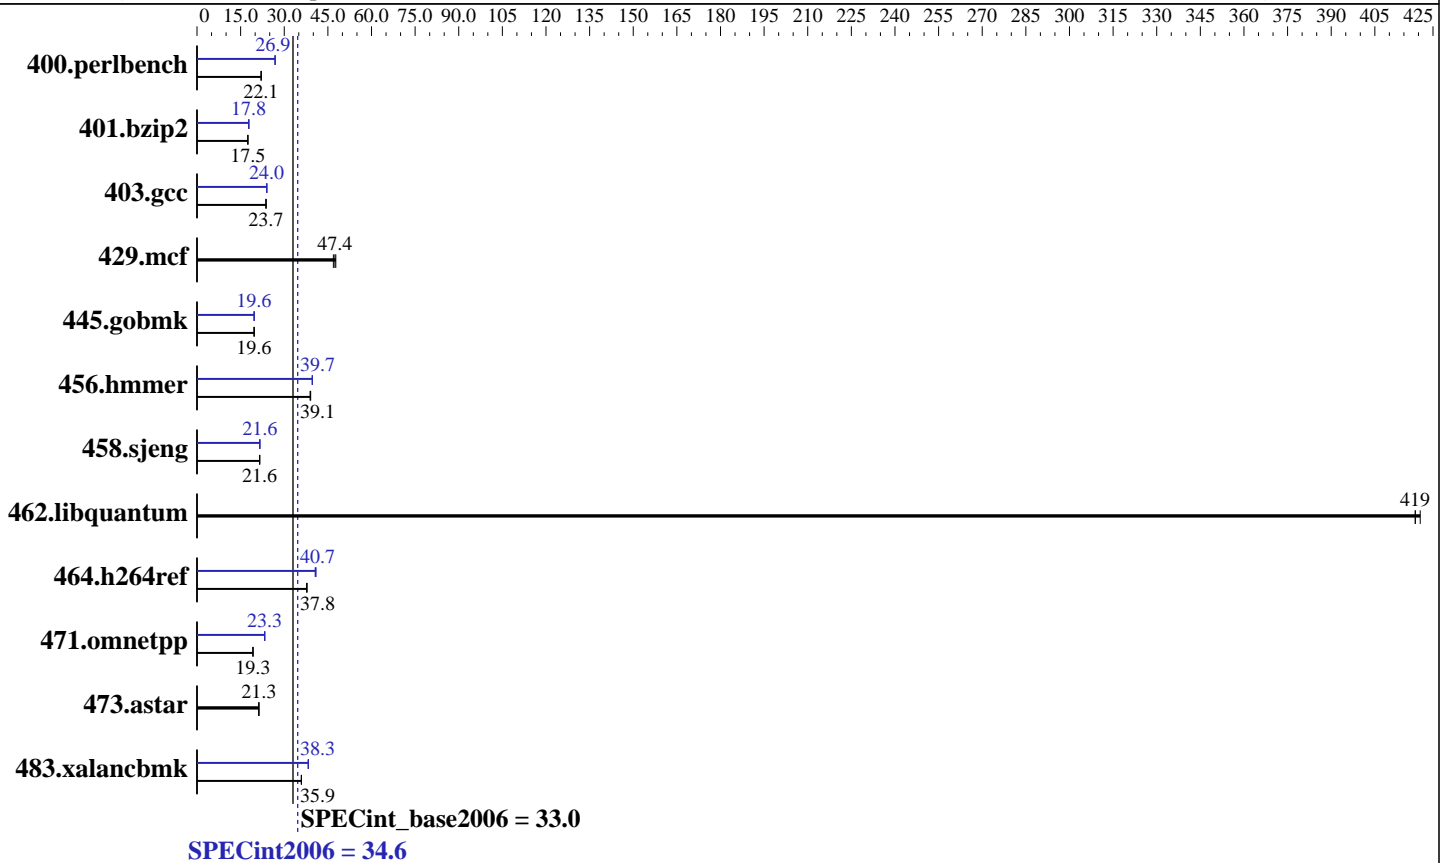

Hardware

CPU Name: Intel Pentium 1403
 CPU Characteristics:
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 5 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (6 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1066 MHz)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 34.6

IBM System x3630 M4 (Intel Pentium 1403)

SPECint_base2006 = 33.0

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	443	22.1	443	22.1	442	22.1	364	26.9	364	26.9	364	26.8
401.bzip2	552	17.5	552	17.5	552	17.5	543	17.8	541	17.8	542	17.8
403.gcc	338	23.8	340	23.7	339	23.7	335	24.0	336	24.0	335	24.0
429.mcf	194	46.9	191	47.7	192	47.4	194	46.9	191	47.7	192	47.4
445.gobmk	534	19.6	534	19.7	534	19.6	534	19.6	534	19.6	534	19.6
456.hammer	239	39.1	240	38.9	239	39.1	235	39.6	235	39.7	235	39.7
458.sjeng	562	21.5	561	21.6	561	21.6	560	21.6	560	21.6	560	21.6
462.libquantum	49.5	419	49.5	419	49.3	421	49.5	419	49.5	419	49.3	421
464.h264ref	587	37.7	585	37.8	586	37.8	540	40.9	544	40.7	544	40.7
471.omnetpp	324	19.3	325	19.2	325	19.3	268	23.3	269	23.3	268	23.3
473.astar	330	21.3	330	21.3	330	21.3	330	21.3	330	21.3	330	21.3
483.xalancbmk	192	35.9	193	35.8	192	35.9	180	38.3	180	38.3	181	38.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS setting:

Operating Mode set to Maximum Performance

Sysinfo program /home/SPECcpu-v1.2/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3

running on x3630m4-rhel62 Tue Jul 24 06:26:35 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Pentium(R) CPU 1403 @ 2.60GHz

1 "physical id"s (chips)

2 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 2

siblings : 2

physical 0: cores 0 1

cache size : 5120 KB

From /proc/meminfo

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 34.6

IBM System x3630 M4 (Intel Pentium 1403)

SPECint_base2006 = 33.0

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

Platform Notes (Continued)

MemTotal: 49405540 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux x3630m4-rhel62 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jul 23 11:21

SPEC is set to: /home/SPECcpu-v1.2
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/vg_x3630m4rhel62-lv_home
ext4 383G 9.6G 354G 3% /home

Additional information from dmidecode:
Memory:
6x Samsung M393B1K70DH0-CK0 8 GB 1066 MHz 2 rank

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/SPECcpu-v1.2/libs/32:/home/SPECcpu-v1.2/libs/64"
OMP_NUM_THREADS = "2"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 34.6

IBM System x3630 M4 (Intel Pentium 1403)

SPECint_base2006 = 33.0

CPU2006 license: 11

Test date: Jul-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs
-L/smartheap -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 34.6

IBM System x3630 M4 (Intel Pentium 1403)

SPECint_base2006 = 33.0

CPU2006 license: 11

Test date: Jul-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
               -ansi-alias

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch
           -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc
         -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
           -ansi-alias

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
           -ansi-alias

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
             -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2)
             -opt-ra-region-strategy=block -ansi-alias
             -Wl,-z,muldefs -L/smartheap -lsmartheap

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 34.6

IBM System x3630 M4 (Intel Pentium 1403)

SPECint_base2006 = 33.0

CPU2006 license: 11

Test date: Jul-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/smartheap -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 10:49:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 August 2012.