



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®\_rate2006 = 1230

PowerEdge M820 (Intel Xeon E5-4650, 2.70 GHz)

SPECint\_rate\_base2006 = 1180

CPU2006 license: 55


Test date: Aug-2012

Test sponsor: Dell Inc.

Hardware Availability: Aug-2012

Tested by: Dell Inc.

Software Availability: Jun-2012

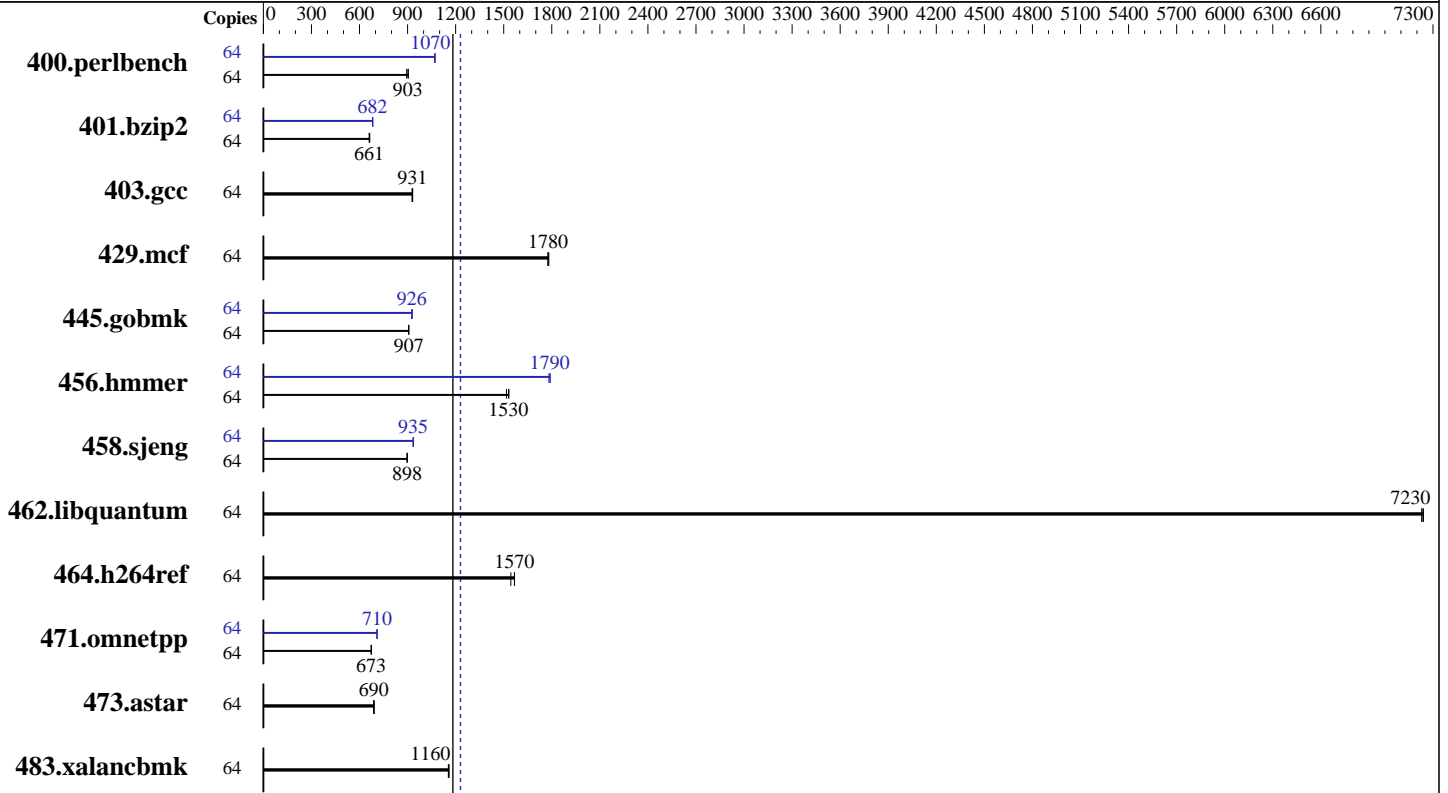

SPECint\_rate\_base2006 = 1180

SPECint\_rate2006 = 1230

## Hardware

CPU Name: Intel Xeon E5-4650  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 300 GB 15000 RPM SAS  
 Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 6.3 (Santiago)  
 2.6.32-279.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 1230

PowerEdge M820 (Intel Xeon E5-4650, 2.70 GHz)

SPECint\_rate\_base2006 = 1180

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Aug-2012  
Hardware Availability: Aug-2012  
Software Availability: Jun-2012

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	64	699	894	691	905	<b>693</b>	<b>903</b>	64	584	1070	<b>584</b>	<b>1070</b>	584	1070		
401.bzip2	64	934	661	930	664	<b>934</b>	<b>661</b>	64	<b>906</b>	<b>682</b>	906	682	904	683		
403.gcc	64	553	931	<b>553</b>	<b>931</b>	555	928	64	553	931	<b>553</b>	<b>931</b>	555	928		
429.mcf	64	<b>328</b>	<b>1780</b>	329	1780	328	1780	64	<b>328</b>	<b>1780</b>	329	1780	328	1780		
445.gobmk	64	740	907	<b>740</b>	<b>907</b>	740	907	64	722	929	<b>725</b>	<b>926</b>	725	926		
456.hammer	64	394	1520	<b>390</b>	<b>1530</b>	390	1530	64	334	1790	335	1780	<b>334</b>	<b>1790</b>		
458.sjeng	64	<b>863</b>	<b>898</b>	863	897	863	898	64	<b>828</b>	<b>935</b>	827	936	829	935		
462.libquantum	64	<b>183</b>	<b>7230</b>	183	7230	183	7240	64	<b>183</b>	<b>7230</b>	183	7230	183	7240		
464.h264ref	64	917	1540	904	1570	<b>904</b>	<b>1570</b>	64	917	1540	904	1570	<b>904</b>	<b>1570</b>		
471.omnetpp	64	<b>594</b>	<b>673</b>	594	673	594	674	64	564	709	564	710	<b>564</b>	<b>710</b>		
473.astar	64	650	692	<b>651</b>	<b>690</b>	653	688	64	650	692	<b>651</b>	<b>690</b>	653	688		
483.xalancbmk	64	383	1150	381	1160	<b>382</b>	<b>1160</b>	64	383	1150	381	1160	<b>382</b>	<b>1160</b>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

CPU Power Management set to Maximum Performance  
Memory Frequency set to Maximum Performance  
Turbo Boost set to Enabled  
C States/C1E set to Enabled  
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on localhost.localdomain Wed Aug 8 14:25:34 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-4650 0 @ 2.70GHz  
4 "physical id"s (chips)  
64 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 1230

PowerEdge M820 (Intel Xeon E5-4650, 2.70 GHz)

SPECint\_rate\_base2006 = 1180

CPU2006 license: 55

Test date: Aug-2012

Test sponsor: Dell Inc.

Hardware Availability: Aug-2012

Tested by: Dell Inc.

Software Availability: Jun-2012

## Platform Notes (Continued)

following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings  : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
physical 2: cores 0 1 2 3 4 5 6 7
physical 3: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

From /proc/meminfo

```
MemTotal:      264449440 kB
HugePages_Total: 0
Hugepagesize:   2048 kB
```

/usr/bin/lsb\_release -d

```
Red Hat Enterprise Linux Server release 6.3 (Santiago)
```

From /etc/\*release\* /etc/\*version\*

```
redhat-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux localhost.localdomain 2.6.32-279.el6.x86_64 #1 SMP Wed Jun 13 18:24:36
EDT 2012 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Aug 8 06:46

SPEC is set to: /root/cpu2006-1.2

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/VolGroup-lv_root
ext4            267G     12G  242G   5% /
```

Additional information from dmidecode:

Memory:

```
17x 00AD00B300AD HMT31GR7BFR4C-PB 8 GB 1600 MHz 2 rank
10x 00AD04B300AD HMT31GR7BFR4C-PB 8 GB 1600 MHz 2 rank
5x 00CE00B300CE M393B1K70DH0-CK0 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org  
http://www.spec.org/



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 1230

PowerEdge M820 (Intel Xeon E5-4650, 2.70 GHz)

SPECint\_rate\_base2006 = 1180

CPU2006 license: 55

Test date: Aug-2012

Test sponsor: Dell Inc.

Hardware Availability: Aug-2012

Tested by: Dell Inc.

Software Availability: Jun-2012

## General Notes (Continued)

Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/smartheap -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

400.perlbench: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 1230

PowerEdge M820 (Intel Xeon E5-4650, 2.70 GHz)

SPECint\_rate\_base2006 = 1180

CPU2006 license: 55

Test date: Aug-2012

Test sponsor: Dell Inc.

Hardware Availability: Aug-2012

Tested by: Dell Inc.

Software Availability: Jun-2012

## Peak Compiler Invocation (Continued)

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`  
 401.bzip2: `-DSPEC_CPU_LP64`  
 456.hmmer: `-DSPEC_CPU_LP64`  
 458.sjeng: `-DSPEC_CPU_LP64`  
 462.libquantum: `-DSPEC_CPU_LINUX`  
 483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32`

462.libquantum: `basepeak = yes`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 1230

PowerEdge M820 (Intel Xeon E5-4650, 2.70 GHz)

SPECint\_rate\_base2006 = 1180

CPU2006 license: 55

Test date: Aug-2012

Test sponsor: Dell Inc.

Hardware Availability: Aug-2012

Tested by: Dell Inc.

Software Availability: Jun-2012

## Peak Optimization Flags (Continued)

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 10:55:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 29 August 2012.