



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

**SPECint®2006 = 36.3**

## Tecal RH5885 V2 (Intel Xeon E7-4860)

**SPECint\_base2006 = 33.2**

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2013

Hardware Availability: Oct-2012

Software Availability: Oct-2012

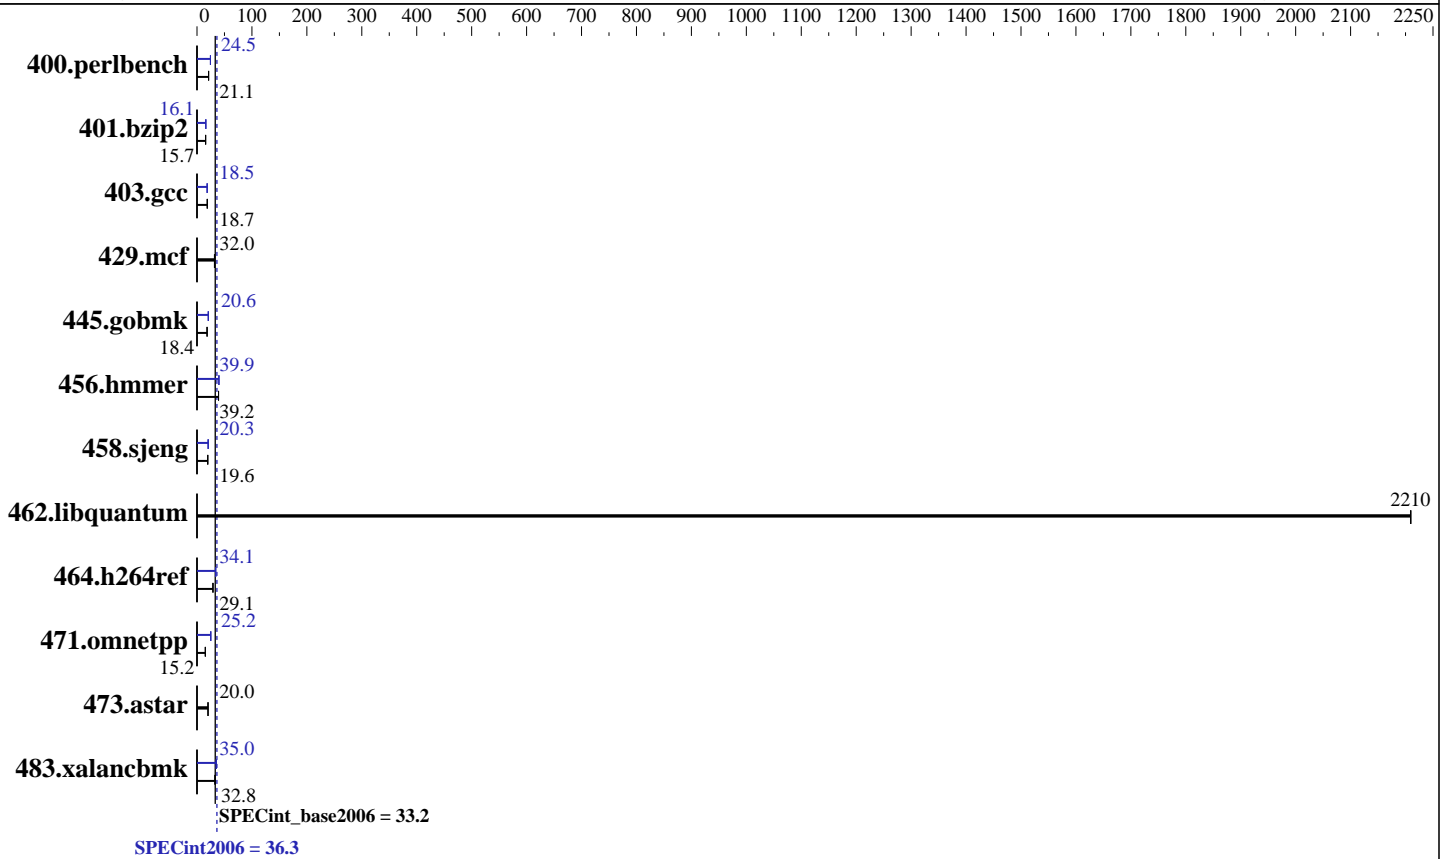

### Hardware

CPU Name: Intel Xeon E7-4860  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.67 GHz  
 CPU MHz: 2267  
 FPU: Integrated  
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 24 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 1 TB (64 x 16 GB 4Rx4 PC3-10600R-9, ECC, running at 1066 MHz)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 13.0.0.079 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 36.3

Tecal RH5885 V2 (Intel Xeon E7-4860)

SPECint\_base2006 = 33.2

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Feb-2013  
Hardware Availability: Oct-2012  
Software Availability: Oct-2012

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<b>463</b>	<b>21.1</b>	463	21.1	462	21.1	399	24.5	<b>399</b>	<b>24.5</b>	399	24.5
401.bzip2	<b>615</b>	<b>15.7</b>	615	15.7	614	15.7	601	16.1	<b>601</b>	<b>16.1</b>	601	16.1
403.gcc	<b>430</b>	<b>18.7</b>	431	18.7	430	18.7	<b>435</b>	<b>18.5</b>	435	18.5	435	18.5
429.mcf	<b>285</b>	<b>32.0</b>	285	32.0	288	31.7	<b>285</b>	<b>32.0</b>	285	32.0	288	31.7
445.gobmk	<b>571</b>	<b>18.4</b>	571	18.4	571	18.4	510	20.6	511	20.5	<b>510</b>	<b>20.6</b>
456.hammer	238	39.2	<b>238</b>	<b>39.2</b>	238	39.2	<b>234</b>	<b>39.9</b>	233	40.0	234	39.8
458.sjeng	618	19.6	618	19.6	<b>618</b>	<b>19.6</b>	<b>595</b>	<b>20.3</b>	595	20.3	595	20.3
462.libquantum	9.38	2210	9.38	2210	<b>9.38</b>	<b>2210</b>	9.38	2210	9.38	2210	<b>9.38</b>	<b>2210</b>
464.h264ref	760	29.1	763	29.0	<b>761</b>	<b>29.1</b>	650	34.1	650	34.1	<b>650</b>	<b>34.1</b>
471.omnetpp	413	15.1	<b>412</b>	<b>15.2</b>	411	15.2	248	25.2	<b>248</b>	<b>25.2</b>	251	24.9
473.astar	350	20.0	<b>350</b>	<b>20.0</b>	348	20.2	350	20.0	<b>350</b>	<b>20.0</b>	348	20.2
483.xalancbmk	<b>210</b>	<b>32.8</b>	210	32.9	211	32.7	<b>197</b>	<b>35.0</b>	197	35.0	197	35.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:

Intel Hyper-Threading set to Disabled  
Power Technology set to Custom, Performance/Watt set to Traditional  
Sysinfo program /home/cpu2006/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 # \$ 5569a0425e2ad530534e4c79a46e4d28  
running on RH5885-24 Fri Feb 1 11:16:46 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E7- 4860 @ 2.27GHz
4 "physical id"s (chips)
40 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 10
siblings : 10
physical 0: cores 0 1 2 8 9 16 17 18 24 25
physical 1: cores 0 1 2 8 9 16 17 18 24 25
physical 2: cores 0 1 2 8 9 16 17 18 24 25
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 36.3

Tecal RH5885 V2 (Intel Xeon E7-4860)

SPECint\_base2006 = 33.2

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2013

Hardware Availability: Oct-2012

Software Availability: Oct-2012

## Platform Notes (Continued)

physical 3: cores 0 1 2 8 9 16 17 18 24 25  
cache size : 24576 KB

```
From /proc/meminfo
MemTotal:      1058808572 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux RH5885-24 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Feb 1 11:08
```

```
SPEC is set to: /home/cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_rh588524-lv_home
                ext4      409G  14G  375G   4% /home
```

```
Additional information from dmidecode:
BIOS American Megatrends Inc. RGPUC-BIOS-V023 12/17/2012
Memory:
64x 16 GB
64x Hyundai HMT42GR7BMR4C-H9 16 GB 1067 MHz 4 rank
```

```
(End of data from sysinfo program)
Descriptions about memory generated by sysinfo are not correct,
only 64 DIMMs are installed not 128, see descriptions below.
Memory:
64x Hyundai HMT42GR7BMR4C-H9 16 GB 1067 MHz 4 rank
```

## General Notes

Environment variables set by runspec before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact,1,0"  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"  
OMP\_NUM\_THREADS = "40"

Binaries compiled on a system with 4x Xeon E7-8870 CPU + 1024GB memory using RHEL6.2  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
runspec command invoked through numactl i.e.:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 36.3

Tecal RH5885 V2 (Intel Xeon E7-4860)

SPECint\_base2006 = 33.2

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2013

Hardware Availability: Oct-2012

Software Availability: Oct-2012

## General Notes (Continued)

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/home/cpu2006/smartheap -lsmartheap64

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

<b>Huawei</b>	<b>SPECint2006 =</b>	<b>36.3</b>
<b>Tecal RH5885 V2 (Intel Xeon E7-4860)</b>	<b>SPECint_base2006 =</b>	<b>33.2</b>

**CPU2006 license:** 3175  
**Test sponsor:** Huawei  
**Tested by:** Huawei

**Test date:** Feb-2013  
**Hardware Availability:** Oct-2012  
**Software Availability:** Oct-2012

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32
```

C++ benchmarks (except as noted below):

```
icpc -m32

473.astar: icpc -m64
```

## Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
            -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc
          -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
            -ansi-alias
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 36.3

Tecal RH5885 V2 (Intel Xeon E7-4860)

SPECint\_base2006 = 33.2

CPU2006 license: 3175

Test date: Feb-2013

Test sponsor: Huawei

Hardware Availability: Oct-2012

Tested by: Huawei

Software Availability: Oct-2012

## Peak Optimization Flags (Continued)

456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-ansi-alias

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/home/cpu2006/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
-Wl,-z,muldefs -L/home/cpu2006/smartheap -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revG.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei	SPECint2006 = 36.3
Tecal RH5885 V2 (Intel Xeon E7-4860)	SPECint_base2006 = 33.2

**CPU2006 license:** 3175  
**Test sponsor:** Huawei  
**Tested by:** Huawei

**Test date:** Feb-2013  
**Hardware Availability:** Oct-2012  
**Software Availability:** Oct-2012

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
 For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
 Report generated on Thu Jul 24 15:12:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
 Originally published on 26 February 2013.