



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Fujitsu SPARC M10-4

SPECfp[®]_rate2006 = 1490

SPECfp_rate_base2006 = 1340

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2013

Hardware Availability: Mar-2013

Software Availability: Mar-2013

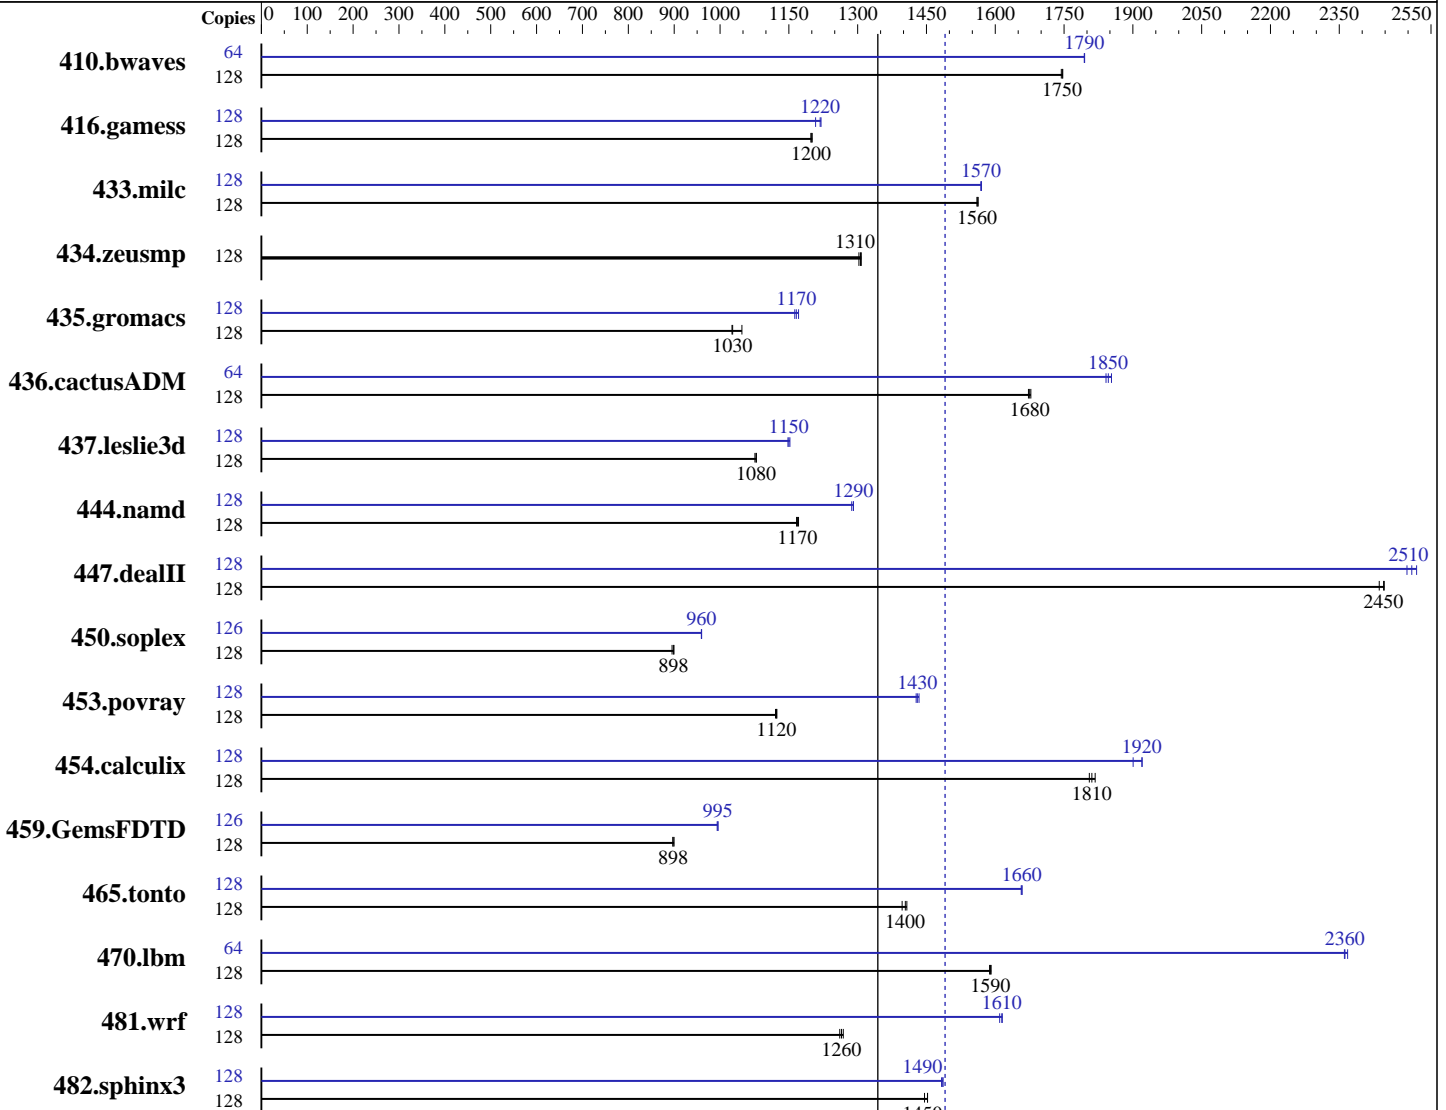

SPECfp_rate_base2006 = 1340

SPECfp_rate2006 = 1490

Hardware

CPU Name: SPARC64 X
 CPU Characteristics:
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip, 2 threads/core
 CPU(s) orderable: 2 or 4 CPU chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 24 MB I+D on chip per chip

Software

Operating System: Solaris 11.1.6.4.0
 Compiler: C/C++/Fortran: Version 12.3 of Oracle Solaris Studio, 1/13 Platform Specific Enhancement
 Auto Parallel: No
 File System: zfs and tmpfs
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: None

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
Fujitsu SPARC M10-4

SPECfp_rate2006 = 1490

SPECfp_rate_base2006 = 1340

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Apr-2013
Hardware Availability: Mar-2013
Software Availability: Mar-2013

L3 Cache: None
Other Cache: None
Memory: 512 GB (32 x 16 GB 2Rx4 PC3L-12800R-11, ECC, running at 1600 MHz)
Disk Subsystem: 1 x 600 GB SAS, 10025 RPM Toshiba MBF2600RC
Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	128	997	1740	996	1750	996	1750	64	485	1790	485	1790	485	1790
416.gamess	128	2092	1200	2087	1200	2090	1200	128	2054	1220	2074	1210	2057	1220
433.milc	128	753	1560	753	1560	752	1560	128	748	1570	749	1570	749	1570
434.zeusmp	128	891	1310	894	1300	892	1310	128	891	1310	894	1300	892	1310
435.gromacs	128	891	1030	872	1050	889	1030	128	780	1170	784	1170	786	1160
436.cactusADM	128	915	1670	912	1680	913	1680	64	414	1850	413	1850	415	1840
437.leslie3d	128	1115	1080	1118	1080	1116	1080	128	1046	1150	1044	1150	1048	1150
444.namd	128	877	1170	880	1170	878	1170	128	795	1290	795	1290	798	1290
447.dealII	128	599	2450	601	2440	598	2450	128	584	2510	581	2520	586	2500
450.soplex	128	1187	900	1188	898	1192	895	126	1096	959	1095	960	1095	960
453.povray	128	606	1120	608	1120	606	1120	128	476	1430	475	1430	477	1430
454.calculix	128	581	1820	583	1810	585	1810	128	550	1920	550	1920	556	1900
459.GemsFDTD	128	1509	900	1514	897	1513	898	126	1345	994	1343	995	1343	995
465.tonto	128	895	1410	902	1400	897	1400	128	760	1660	760	1660	760	1660
470.lbm	128	1106	1590	1105	1590	1108	1590	64	372	2360	372	2360	371	2370
481.wrf	128	1130	1260	1134	1260	1127	1270	128	888	1610	885	1620	886	1610
482.sphinx3	128	1725	1450	1718	1450	1718	1450	128	1679	1490	1682	1480	1679	1490

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

Processes were assigned to specific processors using 'pbind' commands. The config file option 'submit' was used, along with a list of processors in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)

Operating System Notes

Shell Environments:
ulimit -s 131072 was used to limit the space consumed by the stack (and therefore make more space available to the heap).

The "webconsole" service was turned off using svcadm disable webconsole.

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
Fujitsu SPARC M10-4

SPECfp_rate2006 = 1490

SPECfp_rate_base2006 = 1340

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Apr-2013
Hardware Availability: Mar-2013
Software Availability: Mar-2013

Operating System Notes (Continued)

System Tunables:
(/etc/system parameters)
lpg_alloc_prefer=1
Indicates that extra effort should be taken to ensure that pages are created in the nearby lgroup (NUMA location).

Platform Notes

Sysinfo program /export/cpu2006-v1.2/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on 4S-LGA05-D0 Sat Apr 27 22:06:39 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /usr/sbin/psrinfo
SPARC64-X (chipid 0, clock 2800 MHz)
SPARC64-X (chipid 1, clock 2800 MHz)
SPARC64-X (chipid 2, clock 2800 MHz)
SPARC64-X (chipid 3, clock 2800 MHz)
4 chips
128 threads
2800 MHz

From kstat: 64 cores

From prtconf: 522496 Megabytes

/etc/release:
Oracle Solaris 11.1 SPARC
uname -a:
SunOS 4S-LGA05-D0 5.11 11.1 sun4v sparc sun4v

disk: df -h \$SPEC
Filesystem Size Used Available Capacity Mounted on
rpool/export 547G 7.5G 465G 2% /export

(End of data from sysinfo program)

General Notes

output_root was used to put run directories in /tmp/cpu2006 (tmpfs).

Base Compiler Invocation

C benchmarks:
cc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M10-4

SPECfp_rate2006 = 1490

SPECfp_rate_base2006 = 1340

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2013

Hardware Availability: Mar-2013

Software Availability: Mar-2013

Base Compiler Invocation (Continued)

C++ benchmarks:
cc

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Base Optimization Flags

C benchmarks:

```
-fast -xtarget=sparc64x -fma=fused -xpagesize=4M -xipo=2  
-xalias_level=std -xprefetch_level=2  
-xprefetch_auto_type=indirect_array_access -lbsdmalloc  
-M /usr/lib/ld/map.bssalign
```

C++ benchmarks:

```
-fast -xtarget=sparc64x -fma=fused -xpagesize=4M -xipo=2  
-xalias_level=compatible -xunroll=7 -xprefetch_level=2  
-library=no%Cstd,no%stlport4 -I/export/cpu2006-v1.2/stdcxx-4.2.1/include  
-I/export/cpu2006-v1.2/stdcxx-4.2.1/build/include  
-L/export/cpu2006-v1.2/stdcxx-4.2.1/build/lib  
-R/export/cpu2006-v1.2/stdcxx-4.2.1/build/lib -lstd8d  
-M /usr/lib/ld/map.bssalign
```

Fortran benchmarks:

```
-fast -xtarget=sparc64x -fma=fused -xpagesize=4M -xipo=2  
-xvector=%none -M /usr/lib/ld/map.bssalign
```

Benchmarks using both Fortran and C:

```
-fast(cc) -fast(f90) -xtarget=sparc64x -fma=fused -xpagesize=4M  
-xipo=2 -xalias_level=std -xprefetch_level=2  
-xprefetch_auto_type=indirect_array_access -xvector=%none  
-M /usr/lib/ld/map.bssalign
```

Base Other Flags

C benchmarks:

```
-xjobs=16
```

C++ benchmarks:

```
-xjobs=16
```

Fortran benchmarks:

```
-xjobs=16
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
Fujitsu SPARC M10-4

SPECfp_rate2006 = 1490

SPECfp_rate_base2006 = 1340

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Apr-2013
Hardware Availability: Mar-2013
Software Availability: Mar-2013

Base Other Flags (Continued)

Benchmarks using both Fortran and C:
-xjobs=16

Peak Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Peak Optimization Flags

C benchmarks:

```
433.milc: -fast -xtarget=sparc64x -fma=fused -xpagesize=4M -xipo=2
          -xalias_level=std -fsimple=1
          -xprefetch_auto_type=indirect_array_access
          -xprefetch=latx:0.8 -W2,-Ainline:rs=400
          -Qoption cg -Qms_pipe+alldoall -M /usr/lib/ld/map.bssalign

470.lbm: -xprofile=collect:./feedback(pass 1)
          -xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
          -fma=fused -xpagesize=4M -xipo=2 -xalias_level=std
          -xprefetch_level=2 -xprefetch_auto_type=indirect_array_access
          -xpagesize=256M -lbsdmalloc

482.sphinx3: -xprofile=collect:./feedback(pass 1)
              -xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
              -fma=fused -xpagesize=4M -xtarget=sparc64vii -xipo=2
              -xunroll=4 -xprefetch=no%auto -lbsdmalloc
```

C++ benchmarks:

```
444.namd: -xprofile=collect:./feedback(pass 1)
           -xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
           -fma=fused -xpagesize=4M -xalias_level=simple
           -xprefetch=no%auto -Qoption cg -Qms_pipe+alldoall
           -xcache=32/128/4/1:768/128/24/1 -library=stlport4
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
Fujitsu SPARC M10-4

SPECfp_rate2006 = 1490

SPECfp_rate_base2006 = 1340

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Apr-2013
Hardware Availability: Mar-2013
Software Availability: Mar-2013

Peak Optimization Flags (Continued)

447.dealIII: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xpagesize=4M -xtarget=sparc64vii -xipo=1
-xalias_level=compatible -xrestrict -xprefetch=no%auto
-library=no%Cstd,no%stlport4
-I/export/cpu2006-v1.2/stdcxx-4.2.1/include
-I/export/cpu2006-v1.2/stdcxx-4.2.1/build/include
-L/export/cpu2006-v1.2/stdcxx-4.2.1/build/lib
-R/export/cpu2006-v1.2/stdcxx-4.2.1/build/lib -lstd8d

450.soplex: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xpagesize=4M -xtarget=sparc64vii
-library=stlport4 -xO3 -xunroll=7 -xrestrict
-xprefetch_auto_type=indirect_array_access
-Qoption cg -Qlp-ol=1 -Qoption cg -Qlp-it=3
-Qoption cg -Qlp-imb=1 -Qoption iropt -Apf:pdl=3
-xprefetch=latx:0.2 -lbsdmalloc

453.povray: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xpagesize=4M -xipo=2 -xalias_level=compatible
-xunroll=4 -xprefetch=no%auto -xlinkopt=2
-Qoption iropt -Ainline:rs=1024
-Qoption iropt -Ainline:cs=1024
-Qoption iropt -Ainline:inc=900
-xcache=32/128/4/1:768/128/24/1 -library=stlport4 -lfast

Fortran benchmarks:

410.bwaves: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xpagesize=4M -xipo=2 -xunroll=4 -xvector=%none
-xprefetch=no%auto

416.gamess: -fast -xtarget=sparc64x -fma=fused -xpagesize=4M
-xtarget=sparc64vii -xprefetch=no%auto -xunroll=6
-xcache=32/128/4/1:768/128/24/1 -M /usr/lib/ld/map.bssalign

434.zeusmp: basepeak = yes

437.leslie3d: -fast -xtarget=sparc64x -fma=fused -xpagesize=4M
-xtarget=sparc64vii -xvector=%none -xprefetch=latx:0.8
-Qoption cg -Qms_pipe+alldoall -W2,-Rloop_dist
-M /usr/lib/ld/map.bssalign

459.GemsFDTD: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xpagesize=4M -xunroll=9 -xprefetch=latx:0.2
-xprefetch_auto_type=indirect_array_access -xprefetch_level=3
-Qoption cg -Qlp-av=128 -Qoption iropt -Rujam

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
Fujitsu SPARC M10-4

SPECfp_rate2006 = 1490

SPECfp_rate_base2006 = 1340

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Apr-2013
Hardware Availability: Mar-2013
Software Availability: Mar-2013

Peak Optimization Flags (Continued)

465.tonto: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xpagesize=4M -xipo=1 -xO4 -xunroll=3
-xprefetch=no%auto -xcache=32/128/4/1:768/128/24/1
-lbsdmalloc

Benchmarks using both Fortran and C:

435.gromacs: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xtarget=sparc64x -fma=fused -xpagesize=4M
-xalias_level=strong -xprefetch=latx:0.4 -W2,-Rloop_dist
-xtarget=sparc64vii
-xprefetch_auto_type=indirect_array_access

436.cactusADM: -fast(cc) -fast(f90) -xtarget=sparc64x -fma=fused
-xpagesize=4M -xunroll=10 -xprefetch=latx:2.0
-M /export/cpu2006-v1.2/mapfiles/map.256M.align -lbsdmalloc
-M /usr/lib/ld/map.bssalign

454.calculix: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xtarget=sparc64x -fma=fused -xpagesize=4M -xipo=1
-xalias_level=strong -xprefetch=latx:2.0 -stackvar

481.wrf: -fast(cc) -fast(f90) -xtarget=sparc64x -fma=fused
-xpagesize=4M -xtarget=sparc64vii -xunroll=9
-xprefetch=latx:1.3 -Qoption iropt -Rujam -xO4
-xcache=32/128/4/1:768/128/24/1 -M /usr/lib/ld/map.bssalign

Peak Other Flags

C benchmarks:
-xjobs=16

C++ benchmarks:
-xjobs=16

Fortran benchmarks:
-xjobs=16

Benchmarks using both Fortran and C:
-xjobs=16



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M10-4

SPECfp_rate2006 = 1490

SPECfp_rate_base2006 = 1340

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2013

Hardware Availability: Mar-2013

Software Availability: Mar-2013

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.3-SPARC64X.20130522.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.3-SPARC64X.20130522.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 15:25:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 May 2013.