



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

**SPECfp<sup>®</sup>\_rate2006 = 501**

Huawei E9000 CH121 (Intel Xeon E5-2680)

**SPECfp\_rate\_base2006 = 489**

CPU2006 license: 3175


Test date: May-2013

Test sponsor: Huawei

Hardware Availability: Jun-2013

Tested by: Huawei

Software Availability: Mar-2013

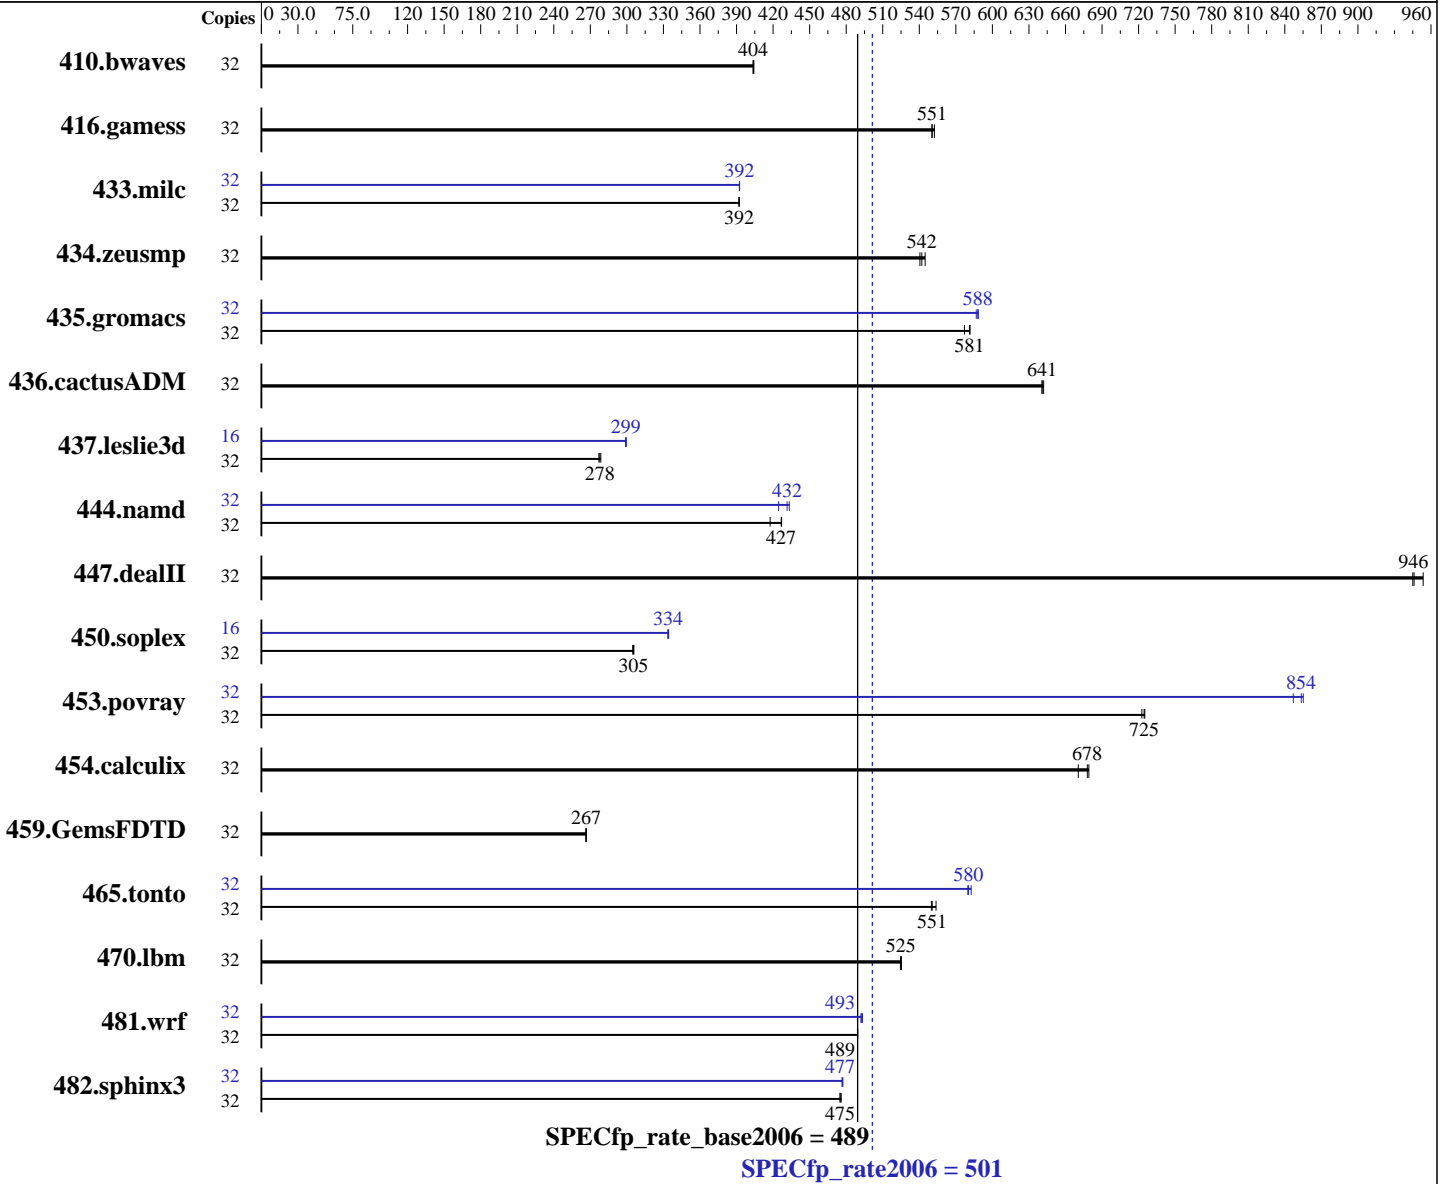

### Hardware

CPU Name: Intel Xeon E5-2680  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.3 (Santiago)  
 2.6.32-279.el6.x86\_64  
 Compiler: C/C++: Version 13.1.1.163 of Intel C++ Studio XE for Linux;  
 Fortran: Version 13.1.1.163 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECfp\_rate2006 = 501

Huawei E9000 CH121 (Intel Xeon E5-2680)

SPECfp\_rate\_base2006 = 489

CPU2006 license: 3175

Test date: May-2013

Test sponsor: Huawei

Hardware Availability: Jun-2013

Tested by: Huawei

Software Availability: Mar-2013

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 300 GB SAS, 10K RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1076	404	<b><u>1077</u></b>	<b><u>404</u></b>	1077	404	32	1076	404	<b><u>1077</u></b>	<b><u>404</u></b>	1077	404
416.gamess	32	1138	550	1134	552	<b><u>1138</u></b>	<b><u>551</u></b>	32	1138	550	1134	552	<b><u>1138</u></b>	<b><u>551</u></b>
433.milc	32	749	392	<b><u>749</u></b>	<b><u>392</u></b>	749	392	32	<b><u>749</u></b>	<b><u>392</u></b>	748	393	749	392
434.zeusmp	32	539	541	<b><u>537</u></b>	<b><u>542</u></b>	535	545	32	539	541	<b><u>537</u></b>	<b><u>542</u></b>	535	545
435.gromacs	32	393	582	<b><u>393</u></b>	<b><u>581</u></b>	396	577	32	389	587	388	588	<b><u>389</u></b>	<b><u>588</u></b>
436.cactusADM	32	<b><u>597</u></b>	<b><u>641</u></b>	597	641	596	642	32	<b><u>597</u></b>	<b><u>641</u></b>	597	641	596	642
437.leslie3d	32	<b><u>1083</u></b>	<b><u>278</u></b>	1086	277	1080	279	16	<b><u>503</u></b>	<b><u>299</u></b>	503	299	502	299
444.namd	32	615	418	601	427	<b><u>601</u></b>	<b><u>427</u></b>	32	605	425	592	433	<b><u>595</u></b>	<b><u>432</u></b>
447.dealII	32	387	945	384	954	<b><u>387</u></b>	<b><u>946</u></b>	32	387	945	384	954	<b><u>387</u></b>	<b><u>946</u></b>
450.soplex	32	<b><u>874</u></b>	<b><u>305</u></b>	873	306	876	305	16	400	334	399	334	<b><u>400</u></b>	<b><u>334</u></b>
453.povray	32	235	725	<b><u>235</u></b>	<b><u>725</u></b>	236	723	32	199	855	<b><u>199</u></b>	<b><u>854</u></b>	201	847
454.calculix	32	394	671	<b><u>389</u></b>	<b><u>678</u></b>	389	679	32	394	671	<b><u>389</u></b>	<b><u>678</u></b>	389	679
459.GemsFDTD	32	1275	266	1273	267	<b><u>1274</u></b>	<b><u>267</u></b>	32	1275	266	1273	267	<b><u>1274</u></b>	<b><u>267</u></b>
465.tonto	32	569	554	573	550	<b><u>572</u></b>	<b><u>551</u></b>	32	540	583	543	580	<b><u>543</u></b>	<b><u>580</u></b>
470.lbm	32	<b><u>838</u></b>	<b><u>525</u></b>	837	525	838	525	32	<b><u>838</u></b>	<b><u>525</u></b>	837	525	838	525
481.wrf	32	730	489	731	489	<b><u>731</u></b>	<b><u>489</u></b>	32	724	493	726	492	<b><u>725</u></b>	<b><u>493</u></b>
482.sphinx3	32	1313	475	<b><u>1313</u></b>	<b><u>475</u></b>	1311	476	32	1308	477	1307	477	<b><u>1308</u></b>	<b><u>477</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
 Transparent Huge Pages enabled with:  
 echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
 Filesystem page cache cleared with:  
 echo 1> /proc/sys/vm/drop\_caches  
 runspec command invoked through numactl i.e.:  
 numactl --interleave=all runspec <etc>  
 Select only test related files when installing the operating system



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

**SPECfp\_rate2006 = 501**

Huawei E9000 CH121 (Intel Xeon E5-2680)

**SPECfp\_rate\_base2006 = 489**

**CPU2006 license:** 3175

**Test sponsor:** Huawei

**Tested by:** Huawei

**Test date:** May-2013

**Hardware Availability:** Jun-2013

**Software Availability:** Mar-2013

### Platform Notes

Sysinfo program /opt/spec2006/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on SPEC1.huawei.com Wed May 15 21:20:01 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2680 0 @ 2.70GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

From /proc/meminfo

```
MemTotal:      132119924 kB
HugePages_Total:    0
Hugepagesize:      2048 kB
```

/usr/bin/lsb\_release -d

```
Red Hat Enterprise Linux Server release 6.3 (Santiago)
```

From /etc/\*release\* /etc/\*version\*

```
redhat-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux SPEC1.huawei.com 2.6.32-279.el6.x86_64 #1 SMP Wed Jun 13 18:24:36 EDT
2012 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 May 15 09:36

SPEC is set to: /opt/spec2006

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda2        ext4      451G   51G  378G  12% /
```

Additional information from dmidecode:

```
BIOS Insyde Corp. OARYV026 01/30/2013
Memory:
 16x Micron 36JSF1G72PZ-1G6K1 8 GB 1600 MHz
 8x NO DIMM NO DIMM
```

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 501

Huawei E9000 CH121 (Intel Xeon E5-2680)

SPECfp\_rate\_base2006 = 489

CPU2006 license: 3175

Test date: May-2013

Test sponsor: Huawei

Hardware Availability: Jun-2013

Tested by: Huawei

Software Availability: Mar-2013

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/opt/spec2006/libs/32:/opt/spec2006/libs/64:/opt/spec2006/sh"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL6.3

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 501

Huawei E9000 CH121 (Intel Xeon E5-2680)

SPECfp\_rate\_base2006 = 489

CPU2006 license: 3175

Test date: May-2013

Test sponsor: Huawei

Hardware Availability: Jun-2013

Tested by: Huawei

Software Availability: Mar-2013

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

447.deallI: -DSPEC\_CPU\_LP64

453.povray: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 501

Huawei E9000 CH121 (Intel Xeon E5-2680)

SPECfp\_rate\_base2006 = 489

CPU2006 license: 3175

Test date: May-2013

Test sponsor: Huawei

Hardware Availability: Jun-2013

Tested by: Huawei

Software Availability: Mar-2013

## Peak Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -static -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3  
 -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 501

Huawei E9000 CH121 (Intel Xeon E5-2680)

SPECfp\_rate\_base2006 = 489

CPU2006 license: 3175

Test date: May-2013

Test sponsor: Huawei

Hardware Availability: Jun-2013

Tested by: Huawei

Software Availability: Mar-2013

## Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 16:44:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 27 August 2013.