



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

SPECfp®2006 = **70.8**

Express5800/T110f-S (Intel Xeon E3-1265L v3)

SPECfp\_base2006 = **68.8**

CPU2006 license: 9006


Test date: Jul-2013

Test sponsor: NEC Corporation

Hardware Availability: Jul-2013

Tested by: NEC Corporation

Software Availability: Mar-2013

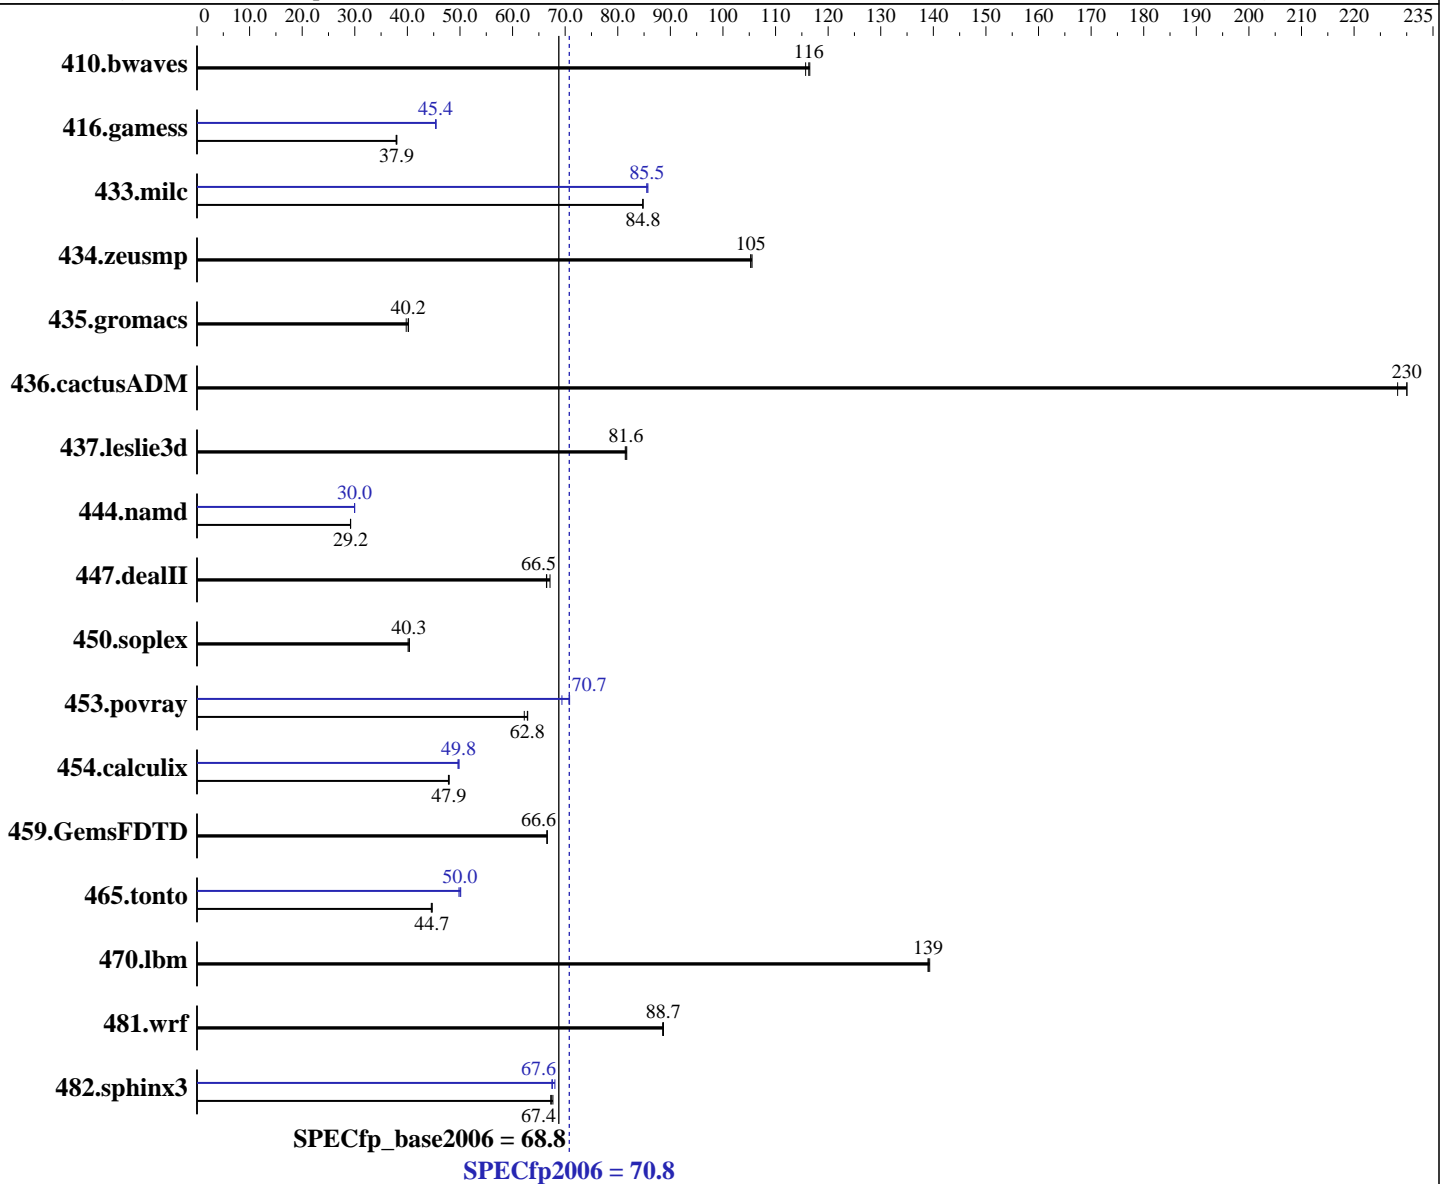

SPECfp\_base2006 = 68.8  
SPECfp2006 = 70.8

### Hardware

CPU Name: Intel Xeon E3-1265L v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 Kernel 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 13.1.1.163 of Intel C++ Studio XE for Linux;  
 Fortran: Version 13.1.1.163 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

SPECfp2006 = **70.8**

Express5800/T110f-S (Intel Xeon E3-1265L v3)

SPECfp\_base2006 = **68.8**

CPU2006 license: 9006

Test date: Jul-2013

Test sponsor: NEC Corporation

Hardware Availability: Jul-2013

Tested by: NEC Corporation

Software Availability: Mar-2013

L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (2 x 8 GB 2Rx8 PC3L-12800E-11, ECC)  
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b><u>117</u></b>	<b><u>116</u></b>	117	117	117	116	<b><u>117</u></b>	<b><u>116</u></b>	117	117	117	116
416.gamess	515	38.0	<b><u>516</u></b>	<b><u>37.9</u></b>	517	37.9	431	45.4	<b><u>431</u></b>	<b><u>45.4</u></b>	431	45.5
433.milc	108	84.8	108	84.8	<b><u>108</u></b>	<b><u>84.8</u></b>	107	85.5	<b><u>107</u></b>	<b><u>85.5</u></b>	107	85.7
434.zeusmp	86.2	106	<b><u>86.4</u></b>	<b><u>105</u></b>	86.4	105	86.2	106	<b><u>86.4</u></b>	<b><u>105</u></b>	86.4	105
435.gromacs	<b><u>178</u></b>	<b><u>40.2</u></b>	180	39.8	178	40.2	<b><u>178</u></b>	<b><u>40.2</u></b>	180	39.8	178	40.2
436.cactusADM	51.9	230	<b><u>51.9</u></b>	<b><u>230</u></b>	52.3	228	51.9	230	<b><u>51.9</u></b>	<b><u>230</u></b>	52.3	228
437.leslie3d	115	81.7	<b><u>115</u></b>	<b><u>81.6</u></b>	115	81.4	115	81.7	<b><u>115</u></b>	<b><u>81.6</u></b>	115	81.4
444.namd	<b><u>275</u></b>	<b><u>29.2</u></b>	275	29.2	275	29.2	<b><u>268</u></b>	<b><u>30.0</u></b>	268	30.0	268	30.0
447.dealII	172	66.4	<b><u>172</u></b>	<b><u>66.5</u></b>	170	67.1	172	66.4	<b><u>172</u></b>	<b><u>66.5</u></b>	170	67.1
450.soplex	<b><u>207</u></b>	<b><u>40.3</u></b>	208	40.1	207	40.4	<b><u>207</u></b>	<b><u>40.3</u></b>	208	40.1	207	40.4
453.povray	<b><u>84.7</u></b>	<b><u>62.8</u></b>	84.6	62.9	85.5	62.2	<b><u>75.2</u></b>	<b><u>70.7</u></b>	75.1	70.8	76.7	69.4
454.calculix	173	47.8	<b><u>172</u></b>	<b><u>47.9</u></b>	172	47.9	166	49.8	<b><u>166</u></b>	<b><u>49.8</u></b>	166	49.6
459.GemsFDTD	159	66.6	<b><u>159</u></b>	<b><u>66.6</u></b>	159	66.6	159	66.6	<b><u>159</u></b>	<b><u>66.6</u></b>	159	66.6
465.tonto	221	44.5	220	44.7	<b><u>220</u></b>	<b><u>44.7</u></b>	196	50.1	<b><u>197</u></b>	<b><u>50.0</u></b>	198	49.8
470.lbm	98.6	139	98.8	139	<b><u>98.8</u></b>	<b><u>139</u></b>	98.6	139	98.8	139	<b><u>98.8</u></b>	<b><u>139</u></b>
481.wrf	126	88.7	<b><u>126</u></b>	<b><u>88.7</u></b>	126	88.5	126	88.7	<b><u>126</u></b>	<b><u>88.7</u></b>	126	88.5
482.sphinx3	<b><u>289</u></b>	<b><u>67.4</u></b>	290	67.2	288	67.7	286	68.0	<b><u>288</u></b>	<b><u>67.6</u></b>	289	67.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
 Energy Performance: Performance  
 Hyper-Threading: Disabled

## General Notes

Environment variables set by runspec before the start of the run:  
 LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"  
 OMP\_NUM\_THREADS = "4"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 70.8

Express5800/T110f-S (Intel Xeon E3-1265L v3)

SPECfp\_base2006 = 68.8

CPU2006 license: 9006

Test date: Jul-2013

Test sponsor: NEC Corporation

Hardware Availability: Jul-2013

Tested by: NEC Corporation

Software Availability: Mar-2013

## General Notes (Continued)

Added glibc-static-2.12-1.107.el6.x86\_64.rpm  
to enable static linking

Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 70.8

Express5800/T110f-S (Intel Xeon E3-1265L v3)

SPECfp\_base2006 = 68.8

CPU2006 license: 9006

Test date: Jul-2013

Test sponsor: NEC Corporation

Hardware Availability: Jul-2013

Tested by: NEC Corporation

Software Availability: Mar-2013

## Base Optimization Flags (Continued)

C++ benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias`

Fortran benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static  
-auto-ilp32 -ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel`

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 70.8

Express5800/T110f-S (Intel Xeon E3-1265L v3)

SPECfp\_base2006 = 68.8

CPU2006 license: 9006

Test date: Jul-2013

Test sponsor: NEC Corporation

Hardware Availability: Jul-2013

Tested by: NEC Corporation

Software Availability: Mar-2013

## Peak Optimization Flags (Continued)

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.20130702.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.20130702.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 70.8

Express5800/T110f-S (Intel Xeon E3-1265L v3)

SPECfp\_base2006 = 68.8

CPU2006 license: 9006

Test date: Jul-2013

Test sponsor: NEC Corporation

Hardware Availability: Jul-2013

Tested by: NEC Corporation

Software Availability: Mar-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 16:18:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 13 August 2013.