



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M3 (Intel Xeon E5-2667 v2, 3.30 GHz)

SPECfp®_rate2006 = 621

SPECfp_rate_base2006 = 605

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Nov-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

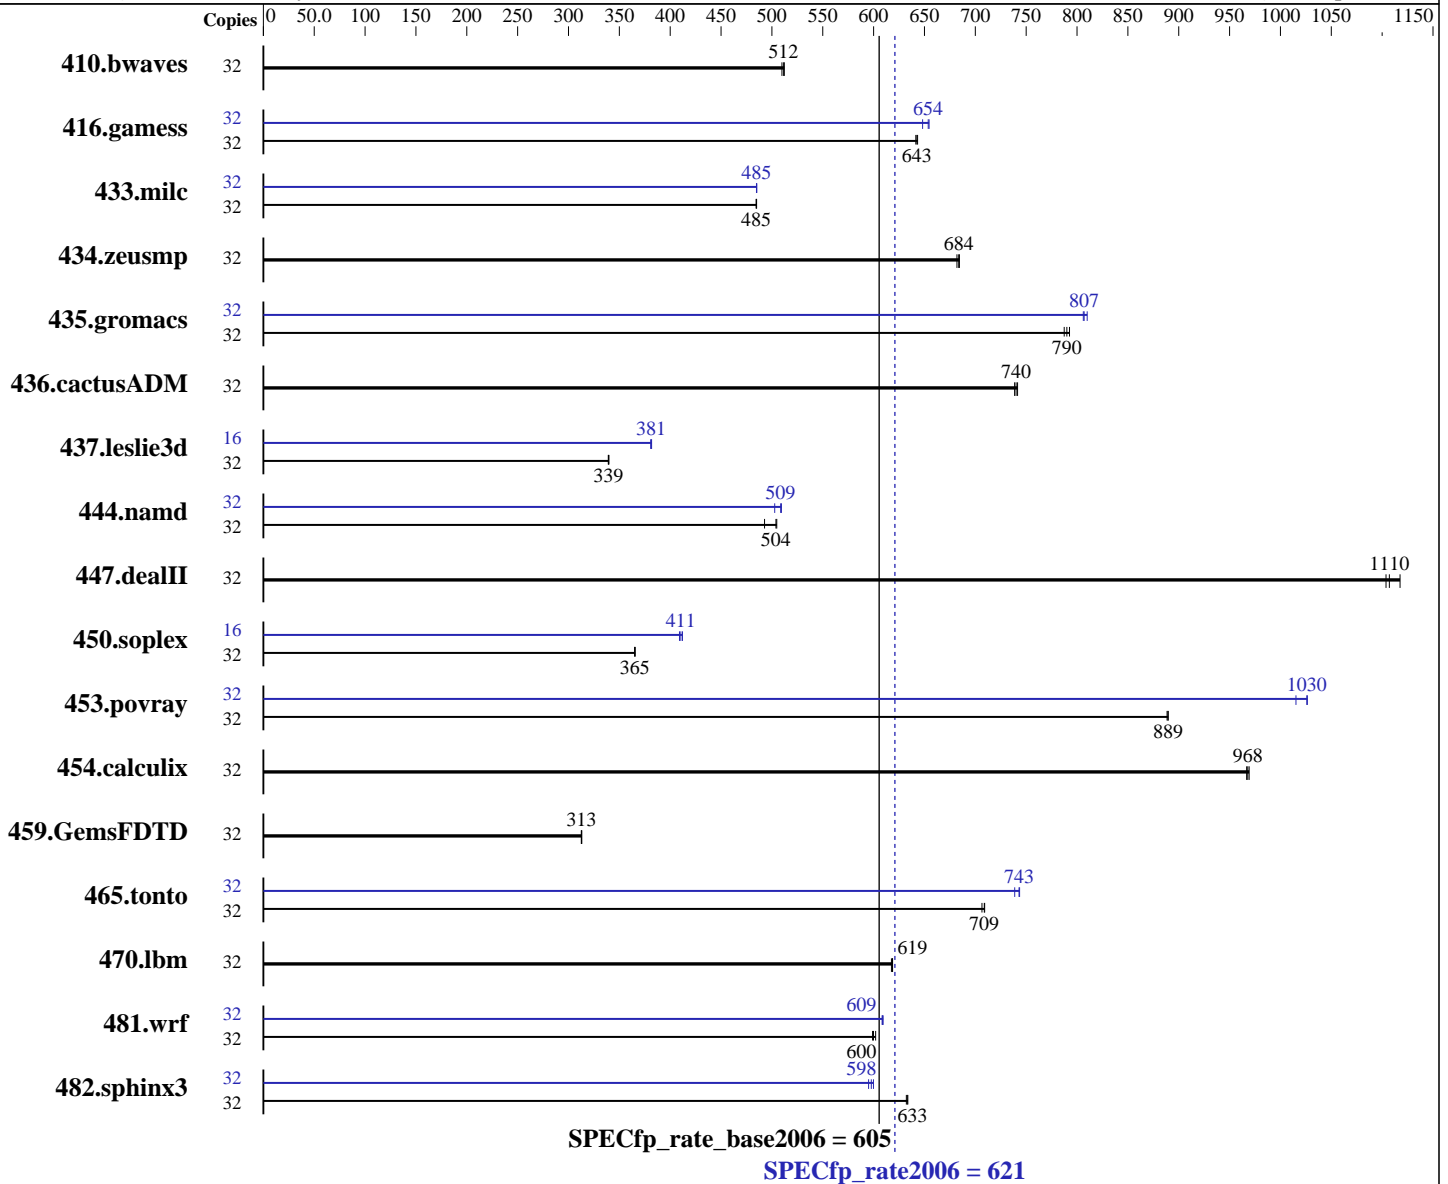

Hardware

CPU Name: Intel Xeon E5-2667 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 4.00 GHz
 CPU MHz: 3300
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 2.6.32-358.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M3 (Intel Xeon E5-2667 v2, 3.30 GHz)

SPECfp_rate2006 = 621

SPECfp_rate_base2006 = 605

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Nov-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC)
Disk Subsystem: 1 X 146 GB 15000 RPM SAS
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	853	510	850	512	849	512	32	853	510	850	512	849	512
416.gamess	32	977	641	975	643	974	643	32	967	648	957	655	959	654
433.milc	32	606	485	606	485	606	485	32	606	485	606	485	606	485
434.zeusmp	32	427	682	426	684	426	684	32	427	682	426	684	426	684
435.gromacs	32	288	793	289	790	290	787	32	283	806	282	810	283	807
436.cactusADM	32	516	742	517	740	518	739	32	516	742	517	740	518	739
437.leslie3d	32	886	339	885	340	887	339	16	395	381	394	382	394	381
444.namd	32	521	493	509	504	508	505	32	510	503	505	509	504	509
447.dealII	32	332	1100	328	1120	331	1110	32	332	1100	328	1120	331	1110
450.soplex	32	731	365	730	365	731	365	16	326	409	324	412	325	411
453.povray	32	192	889	191	889	191	890	32	168	1020	166	1030	166	1030
454.calculix	32	272	969	273	967	273	968	32	272	969	273	967	273	968
459.GemsFDTD	32	1085	313	1086	313	1085	313	32	1085	313	1086	313	1085	313
465.tonto	32	444	709	446	707	444	709	32	424	743	426	739	423	744
470.lbm	32	712	618	711	619	711	619	32	712	618	711	619	711	619
481.wrf	32	594	602	596	600	597	599	32	587	609	587	609	588	608
482.sphinx3	32	987	632	985	633	984	634	32	1048	595	1043	598	1040	600

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Intel HT Technology = Enabled
CPU performance set to HPC

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M3 (Intel Xeon E5-2667 v2, 3.30 GHz)

SPECfp_rate2006 = 621

SPECfp_rate_base2006 = 605

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Nov-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

Platform Notes (Continued)

Power Technology set to Custom
 CPU Power State C6 set to Enabled
 CPU Power State C1 Enhanced set to Disabled
 Energy Performance policy set to Performance
 Memory RAS configuration set to Maximum Performance
 DRAM Clock Throttling Set to Performance
 LV DDR Mode set to Performance-mode
 DRAM Refresh Rate Set to 1x
 Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6818
 \$Rev: 6818 \$ \$Date:: 2012-07-17 # \$ e86d102572650a6e4d596a3cee98f191
 running on B200M3CR CR Fri Nov 8 19:12:02 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2667 v2 @ 3.30GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 8
  siblings    : 16
  physical 0: cores 1 2 3 4 8 9 10 11
  physical 1: cores 1 2 3 4 8 9 10 11
cache size    : 25600 KB
```

```
From /proc/meminfo
MemTotal:      132087320 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux B200M3CR CR 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Nov 8 19:01

```
SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdal       ext4      134G  38G  90G  30% /
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M3 (Intel Xeon E5-2667 v2, 3.30 GHz)

SPECfp_rate2006 = 621

SPECfp_rate_base2006 = 605

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Nov-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

Platform Notes (Continued)

Additional information from dmidecode:

BIOS Cisco Systems, Inc. B200M3.2.1.2.12.080620131158 08/06/2013

Memory:

16x 0xAD00 HMT31GR7EFR4C-RD 8 GB 1866 MHz 2 rank

8x NO DIMM NO DIMM

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M3 (Intel Xeon E5-2667 v2, 3.30 GHz)

SPECfp_rate2006 = 621

SPECfp_rate_base2006 = 605

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Nov-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

Base Portability Flags (Continued)

```

447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

```
482.sphinx3: icc -m32
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M3 (Intel Xeon E5-2667 v2, 3.30 GHz)

SPECfp_rate2006 = 621

SPECfp_rate_base2006 = 605

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Nov-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -auto-ilp32

```

```

470.lbm: basepeak = yes

```

```

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
            -unroll2

```

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -fno-alias -auto-ilp32

```

```

447.dealII: basepeak = yes

```

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M3 (Intel Xeon E5-2667 v2, 3.30 GHz)

SPECfp_rate2006 = 621

SPECfp_rate_base2006 = 605

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Nov-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130717.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130717.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 18:11:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 December 2013.