



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY BX924 S4, Intel Xeon E5-2630L v2, 2.40 GHz

SPECfp<sup>®</sup>2006 = **80.0**

SPECfp\_base2006 = **77.1**

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Oct-2013

Hardware Availability: Oct-2013

Software Availability: Sep-2013

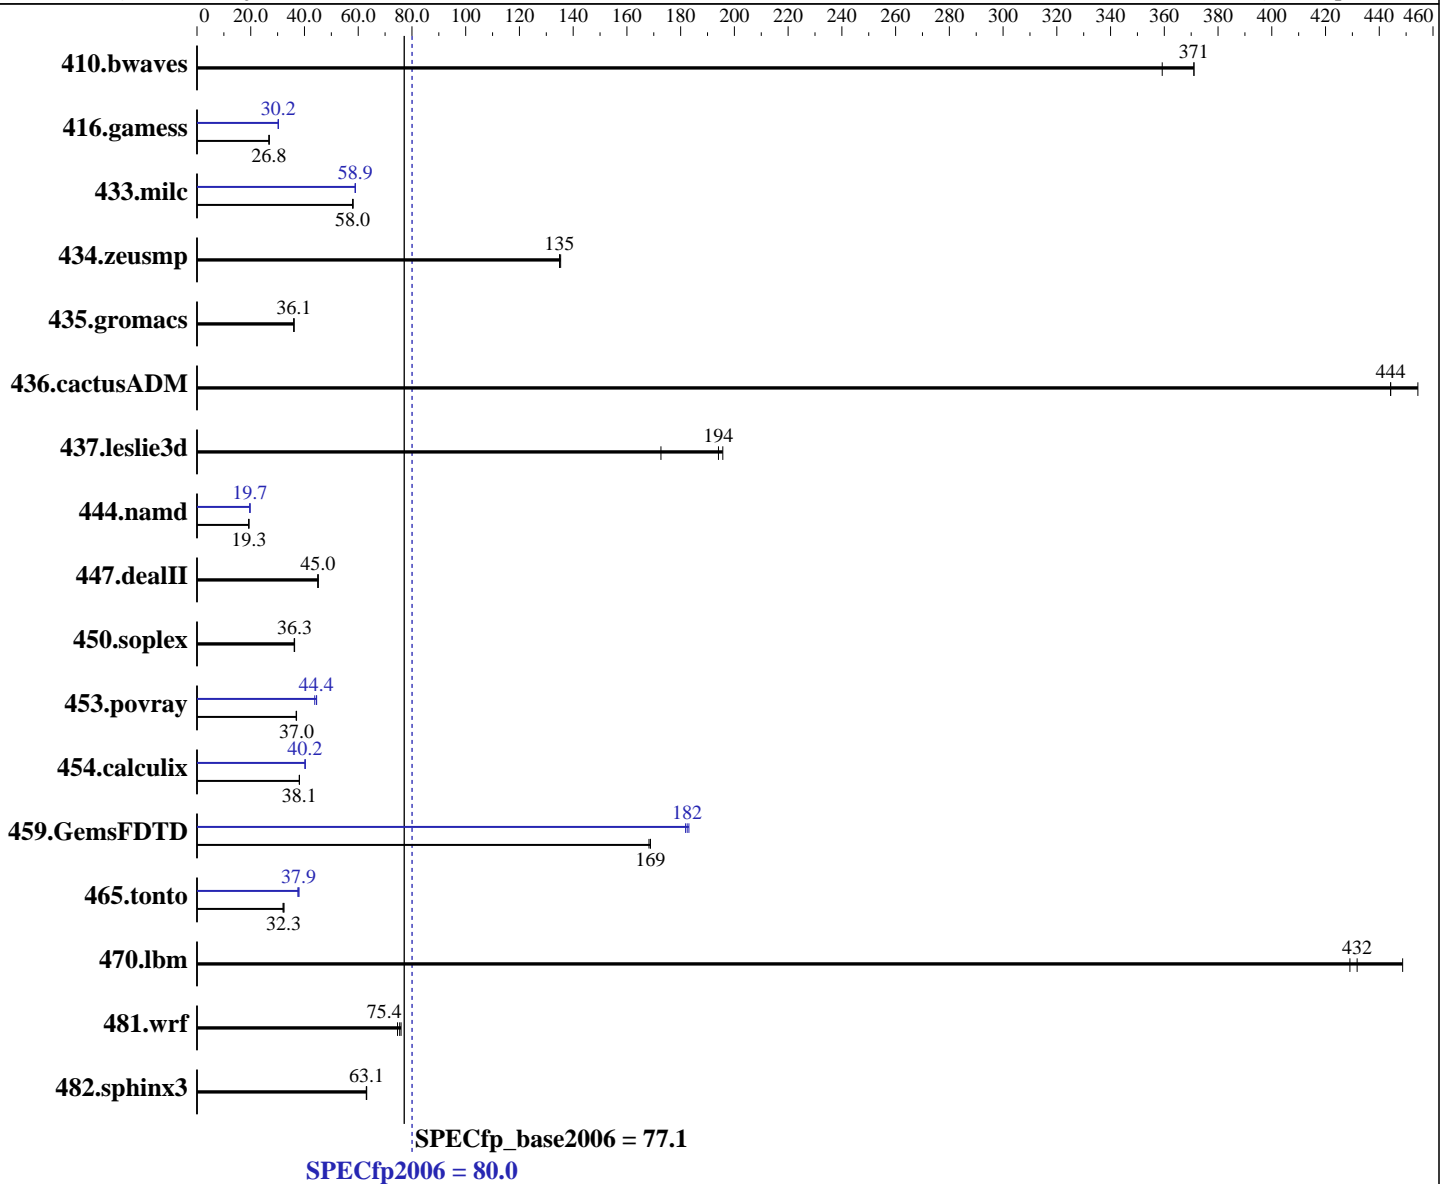

**Hardware**

CPU Name: Intel Xeon E5-2630L v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

**Software**

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.11.1.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY BX924 S4, Intel Xeon E5-2630L v2, 2.40 GHz

SPECfp2006 = **80.0**

SPECfp\_base2006 = **77.1**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Oct-2013

Hardware Availability: Oct-2013

Software Availability: Sep-2013

L3 Cache: 15 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC, running at 1600 MHz and CL11)  
Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	37.8	359	<b>36.6</b>	<b>371</b>	36.6	371	37.8	359	<b>36.6</b>	<b>371</b>	36.6	371
416.gamess	<b>730</b>	<b>26.8</b>	731	26.8	729	26.9	646	30.3	<b>647</b>	<b>30.2</b>	648	30.2
433.milc	158	58.1	<b>158</b>	<b>58.0</b>	158	57.9	156	58.9	156	58.9	<b>156</b>	<b>58.9</b>
434.zeusmp	67.2	135	67.4	135	<b>67.4</b>	<b>135</b>	67.2	135	67.4	135	<b>67.4</b>	<b>135</b>
435.gromacs	198	36.1	198	36.0	<b>198</b>	<b>36.1</b>	198	36.1	198	36.0	<b>198</b>	<b>36.1</b>
436.cactusADM	26.3	454	<b>26.9</b>	<b>444</b>	26.9	444	26.3	454	<b>26.9</b>	<b>444</b>	26.9	444
437.leslie3d	48.0	196	54.4	173	<b>48.4</b>	<b>194</b>	48.0	196	54.4	173	<b>48.4</b>	<b>194</b>
444.namd	417	19.3	416	19.3	<b>416</b>	<b>19.3</b>	<b>407</b>	<b>19.7</b>	408	19.7	407	19.7
447.dealII	254	45.0	<b>254</b>	<b>45.0</b>	254	45.1	254	45.0	<b>254</b>	<b>45.0</b>	254	45.1
450.soplex	<b>230</b>	<b>36.3</b>	231	36.2	230	36.3	<b>230</b>	<b>36.3</b>	231	36.2	230	36.3
453.povray	144	37.1	144	36.9	<b>144</b>	<b>37.0</b>	119	44.5	<b>120</b>	<b>44.4</b>	121	43.8
454.calculix	216	38.1	217	38.1	<b>216</b>	<b>38.1</b>	<b>205</b>	<b>40.2</b>	205	40.3	205	40.2
459.GemsFDTD	63.1	168	<b>62.9</b>	<b>169</b>	62.9	169	<b>58.2</b>	<b>182</b>	58.4	182	58.0	183
465.tonto	<b>305</b>	<b>32.3</b>	304	32.3	307	32.0	<b>260</b>	<b>37.9</b>	259	37.9	262	37.5
470.lbm	<b>31.8</b>	<b>432</b>	30.6	449	32.0	429	<b>31.8</b>	<b>432</b>	30.6	449	32.0	429
481.wrf	150	74.6	<b>148</b>	<b>75.4</b>	147	75.9	150	74.6	<b>148</b>	<b>75.4</b>	147	75.9
482.sphinx3	<b>309</b>	<b>63.1</b>	309	63.2	309	63.0	<b>309</b>	<b>63.1</b>	309	63.2	309	63.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Energy Performance = Performance  
Utilization Profile = Unbalanced



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY BX924 S4, Intel Xeon E5-2630L v2, 2.40 GHz

SPECfp2006 = 80.0

SPECfp\_base2006 = 77.1

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Oct-2013  
Hardware Availability: Oct-2013  
Software Availability: Sep-2013

## General Notes

Environment variables set by runspec before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact,1,0"  
LD\_LIBRARY\_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64:/SPECcpu2006/sh"  
OMP\_NUM\_THREADS = "12"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY BX924 S4, Intel Xeon E5-2630L v2, 2.40 GHz

**SPECfp2006 = 80.0**

**SPECfp\_base2006 = 77.1**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Oct-2013  
**Hardware Availability:** Oct-2013  
**Software Availability:** Sep-2013

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY BX924 S4, Intel Xeon E5-2630L v2, 2.40 GHz

SPECfp2006 = 80.0

SPECfp\_base2006 = 77.1

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Oct-2013  
Hardware Availability: Oct-2013  
Software Availability: Sep-2013

## Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20131009.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20131009.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY BX924 S4, Intel Xeon E5-2630L v2, 2.40 GHz

**SPECfp2006 = 80.0**

**SPECfp\_base2006 = 77.1**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Oct-2013

**Hardware Availability:** Oct-2013

**Software Availability:** Sep-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 17:57:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 3 December 2013.