



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint®_rate2006 = 894

I620-G10 (Intel Xeon E5-2690 v2, 3.00 GHz)

SPECint_rate_base2006 = 866

CPU2006 license: 9046


Test date: Nov-2013

Test sponsor: Sugon

Hardware Availability: Nov-2013

Tested by: Sugon

Software Availability: Nov-2013

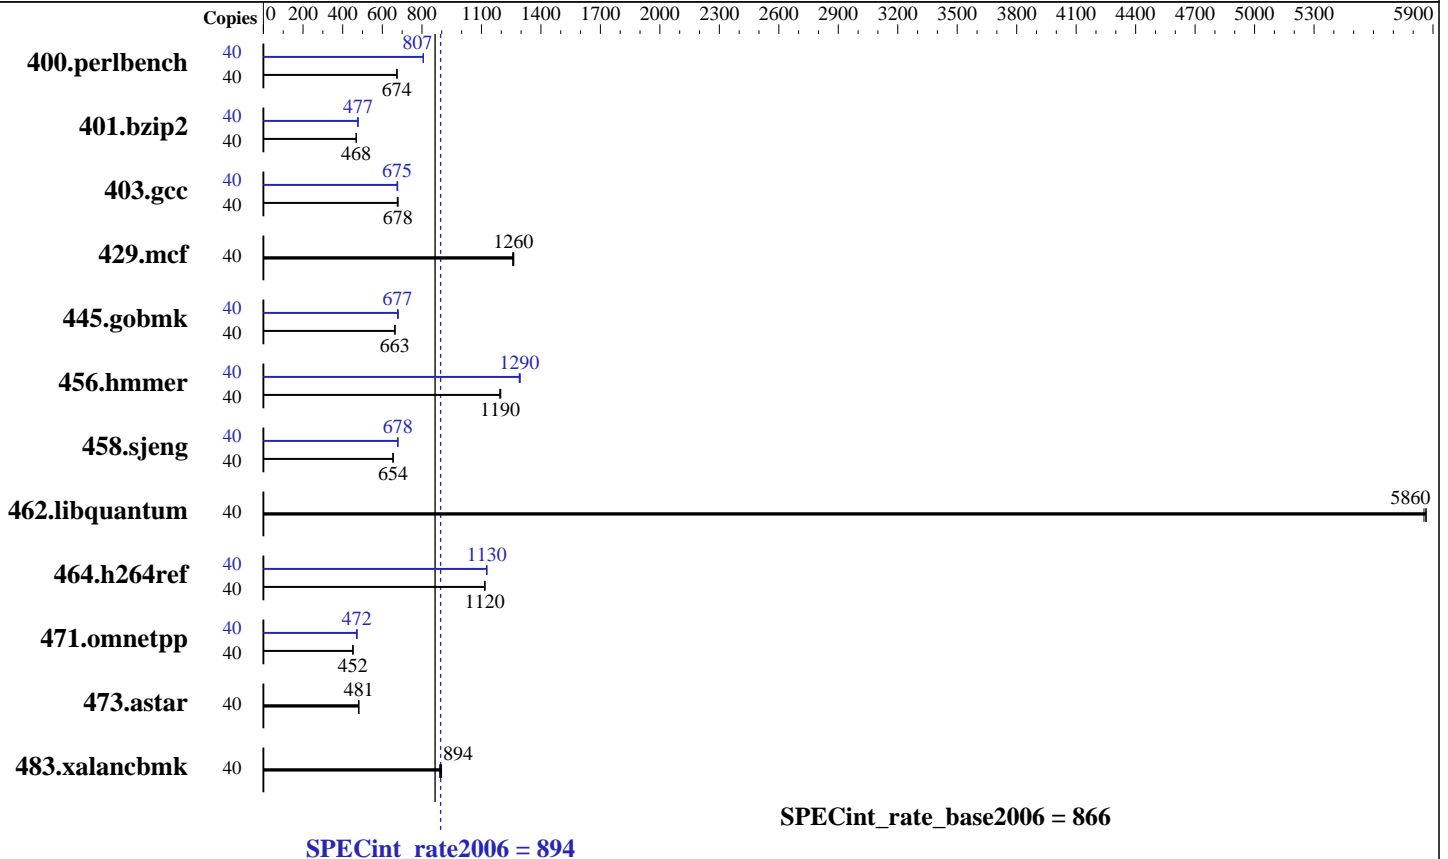

Hardware

CPU Name: Intel Xeon E5-2690 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)
 Disk Subsystem: 4 x 450 GB SAS 10K RPM, RAID0
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP3 (x86_64) 3.0.76-0.11-default
 Compiler: C/C++; Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint_rate2006 = **894**

I620-G10 (Intel Xeon E5-2690 v2, 3.00 GHz)

SPECint_rate_base2006 = **866**

CPU2006 license: 9046
Test sponsor: Sugon
Tested by: Sugon

Test date: Nov-2013
Hardware Availability: Nov-2013
Software Availability: Nov-2013

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	580	674	580	674	580	674	40	484	807	485	806	484	807
401.bzip2	40	824	468	823	469	824	468	40	809	477	811	476	808	478
403.gcc	40	474	679	477	675	475	678	40	475	678	477	675	477	675
429.mcf	40	290	1260	289	1260	289	1260	40	290	1260	289	1260	289	1260
445.gobmk	40	632	663	633	663	632	664	40	620	677	620	677	616	681
456.hammer	40	312	1190	312	1200	313	1190	40	288	1300	289	1290	289	1290
458.sjeng	40	740	654	740	654	739	655	40	713	679	713	678	714	678
462.libquantum	40	142	5850	141	5870	141	5860	40	142	5850	141	5870	141	5860
464.h264ref	40	793	1120	793	1120	792	1120	40	785	1130	785	1130	786	1130
471.omnetpp	40	553	452	554	452	553	452	40	533	469	528	473	530	472
473.astar	40	583	481	583	482	585	480	40	583	481	583	482	585	480
483.xalancbmk	40	310	889	309	894	307	899	40	310	889	309	894	307	899

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Configuration:
Intel Virtualization technology set to disabled
Power Technology set to performance
Turbo boost set to enabled
DDR Speed set to force 1866
Sysinfo program /home/spec/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on linux-tn7k Wed Nov 20 17:12:15 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2690 v2 @ 3.00GHz
2 "physical id"s (chips)
40 "processors"

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint_rate2006 = 894

I620-G10 (Intel Xeon E5-2690 v2, 3.00 GHz)

SPECint_rate_base2006 = 866

CPU2006 license: 9046
Test sponsor: Sugon
Tested by: Sugon

Test date: Nov-2013
Hardware Availability: Nov-2013
Software Availability: Nov-2013

Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 10
siblings  : 20
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:      264516912 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3
```

```
uname -a:
Linux linux-tn7k 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013
(ccab990) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 20 16:59 last=S
```

```
SPEC is set to: /home/spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/md126p1    ext3  784G   77G  668G  11% /home/spec
```

```
Additional information from dmidecode:
BIOS American Megatrends Inc. 3.0a 10/10/2013
Memory:
16x 16 GB
16x Hynix Semiconducto HMT42GR7AFR4C 16 GB 1866 MHz
```

(End of data from sysinfo program)
There is a error in sysinfo output. There are only 16 DIMMs in this system. The cause of this error is the sysinfo itself. The sysinfo of revsion 6818 can't identify the correct memory information. The memory information should be:
Memory:
16x Hynix Semiconducto HMT42GR7AFR4C 16 GB 1866 MHz



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint_rate2006 = 894

I620-G10 (Intel Xeon E5-2690 v2, 3.00 GHz)

SPECint_rate_base2006 = 866

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2013

Hardware Availability: Nov-2013

Software Availability: Nov-2013

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/spec/libs/32:/home/spec/libs/64:/home/spec/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint_rate2006 = 894

I620-G10 (Intel Xeon E5-2690 v2, 3.00 GHz)

SPECint_rate_base2006 = 866

CPU2006 license: 9046
Test sponsor: Sugon
Tested by: Sugon

Test date: Nov-2013
Hardware Availability: Nov-2013
Software Availability: Nov-2013

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64
401.bzip2: icc -m64
456.hmmer: icc -m64
458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint_rate2006 = 894

I620-G10 (Intel Xeon E5-2690 v2, 3.00 GHz)

SPECint_rate_base2006 = 866

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2013

Hardware Availability: Nov-2013

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-IVB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-IVB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 19:34:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 December 2013.