



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®_rate2006 = 421

ProLiant DL380e Gen8
(1.70 GHz, Intel Xeon E5-2450L v2)

SPECfp_rate_base2006 = 411

CPU2006 license: 3


Test date: Jan-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

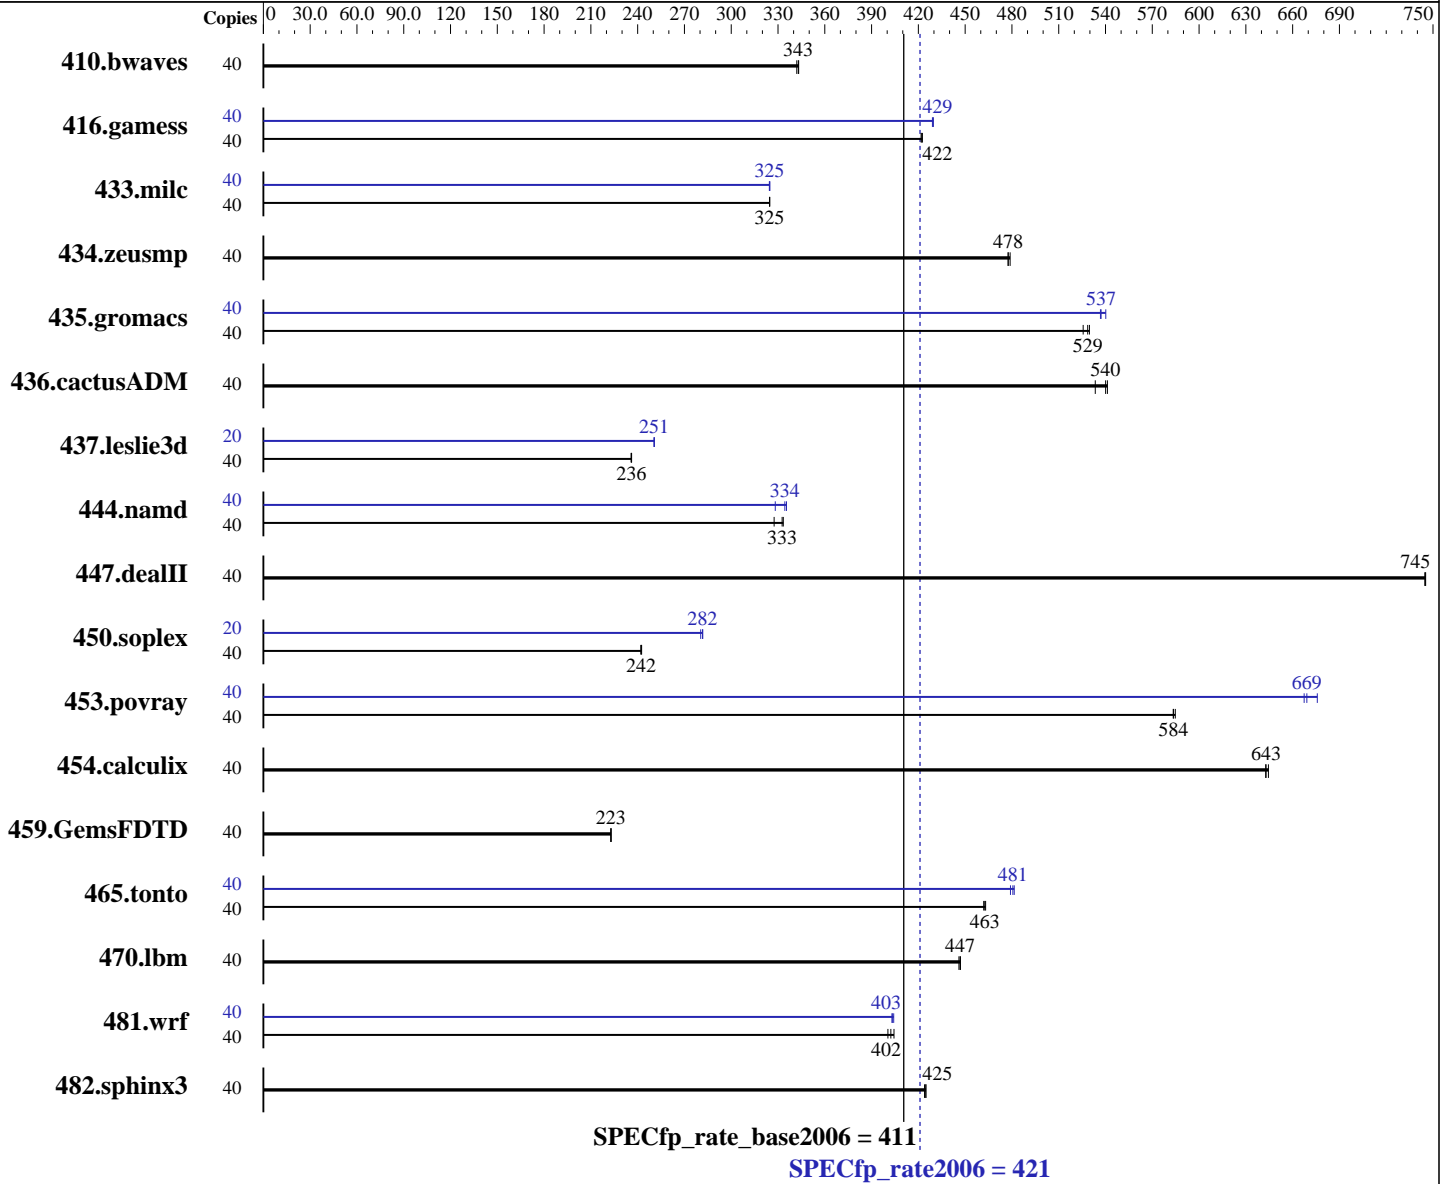

Hardware

CPU Name: Intel Xeon E5-2450L v2
 CPU Characteristics: Intel Turbo Boost Technology up to 2.10 GHz
 CPU MHz: 1700
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 Kernel 2.6.32-358.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = **421**

ProLiant DL380e Gen8
(1.70 GHz, Intel Xeon E5-2450L v2)

SPECfp_rate_base2006 = **411**

CPU2006 license: 3

Test date: Jan-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 300 GB 15 K RPM SAS, RAID 0
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	1589	342	1584	343	1585	343	40	1589	342	1584	343	1585	343
416.gamess	40	1853	423	1857	422	1855	422	40	1823	430	1826	429	1824	429
433.milc	40	1131	325	1131	325	1131	325	40	1132	324	1131	325	1131	325
434.zeusmp	40	760	479	762	478	762	478	40	760	479	762	478	762	478
435.gromacs	40	540	529	539	530	543	526	40	529	540	532	537	532	537
436.cactusADM	40	885	540	896	533	883	541	40	885	540	896	533	883	541
437.leslie3d	40	1593	236	1595	236	1593	236	20	750	251	750	251	750	251
444.namd	40	962	333	964	333	979	328	40	959	334	977	328	956	335
447.dealII	40	614	745	614	745	614	745	40	614	745	614	745	614	745
450.soplex	40	1375	243	1378	242	1377	242	20	595	280	592	282	592	282
453.povray	40	365	584	365	583	364	585	40	315	676	319	667	318	669
454.calculix	40	512	644	513	643	513	643	40	512	644	513	643	513	643
459.GemsFDTD	40	1904	223	1904	223	1904	223	40	1904	223	1904	223	1904	223
465.tonto	40	851	463	850	463	852	462	40	819	481	822	479	818	481
470.lbm	40	1230	447	1230	447	1232	446	40	1230	447	1230	447	1232	446
481.wrf	40	1105	404	1116	400	1110	402	40	1108	403	1108	403	1105	404
482.sphinx3	40	1839	424	1835	425	1835	425	40	1839	424	1835	425	1835	425

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
Used "stop-services" script before the run



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 421

ProLiant DL380e Gen8
(1.70 GHz, Intel Xeon E5-2450L v2)

SPECfp_rate_base2006 = 411

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jan-2014
Hardware Availability: Jan-2014
Software Availability: Sep-2013

Platform Notes

BIOS Configuration:

HP Power Profile set to Maximum Performance
Memory Power Savings Mode set to Maximum Performance
Thermal Configuration set to Maximum Cooling
Collaborative Power Control set to Disabled
Dynamic Power Capping Functionality set to Disabled
Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to 1x

Sysinfo program /cpu2006/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date: 2012-07-17 # \$ e86d102572650a6e4d596a3cee98f191
running on DL380e-Gen8-CXD Sun Jan 26 18:28:16 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2450L v2 @ 1.70GHz
 2 "physical id"s (chips)
 40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 10
  siblings  : 20
  physical 0: cores 0 1 2 3 4 8 9 10 11 12
  physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:      99032844 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux DL380e-Gen8-CXD 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST
2013 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 26 18:25
```

```
SPEC is set to: /cpu2006
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda3        ext4      548G      14G  507G   3% /
Continued on next page
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 421

ProLiant DL380e Gen8
(1.70 GHz, Intel Xeon E5-2450L v2)

SPECfp_rate_base2006 = 411

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jan-2014
Hardware Availability: Jan-2014
Software Availability: Sep-2013

Platform Notes (Continued)

Additional information from dmidecode:

BIOS HP P73 11/12/2013

Memory:

12x HP 689911-071 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)

Regarding the sysinfo display about the CPU cores from /proc/cpuinfo, the correct mapping should display as cores 0 through 9. The mapping should read as the following:

```
physical 0: cores 0 1 2 3 4 5 6 7 8 9
physical 1: cores 0 1 2 3 4 5 6 7 8 9
```

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 421

ProLiant DL380e Gen8
(1.70 GHz, Intel Xeon E5-2450L v2)

SPECfp_rate_base2006 = 411

CPU2006 license: 3

Test date: Jan-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Base Portability Flags (Continued)

```
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 421

ProLiant DL380e Gen8
(1.70 GHz, Intel Xeon E5-2450L v2)

SPECfp_rate_base2006 = 411

CPU2006 license: 3

Test date: Jan-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -auto-ilp32

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll14 -ansi-alias

```

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 421

ProLiant DL380e Gen8
(1.70 GHz, Intel Xeon E5-2450L v2)

SPECfp_rate_base2006 = 411

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jan-2014
Hardware Availability: Jan-2014
Software Availability: Sep-2013

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 19:55:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 February 2014.