



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation


IBM System x3530 M4  
(Intel Xeon E5-2470 v2, 2.40 GHz)

**SPECint®2006 = 54.6**

**SPECint\_base2006 = 50.8**

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Jan-2014  
Hardware Availability: Mar-2014  
Software Availability: Sep-2013

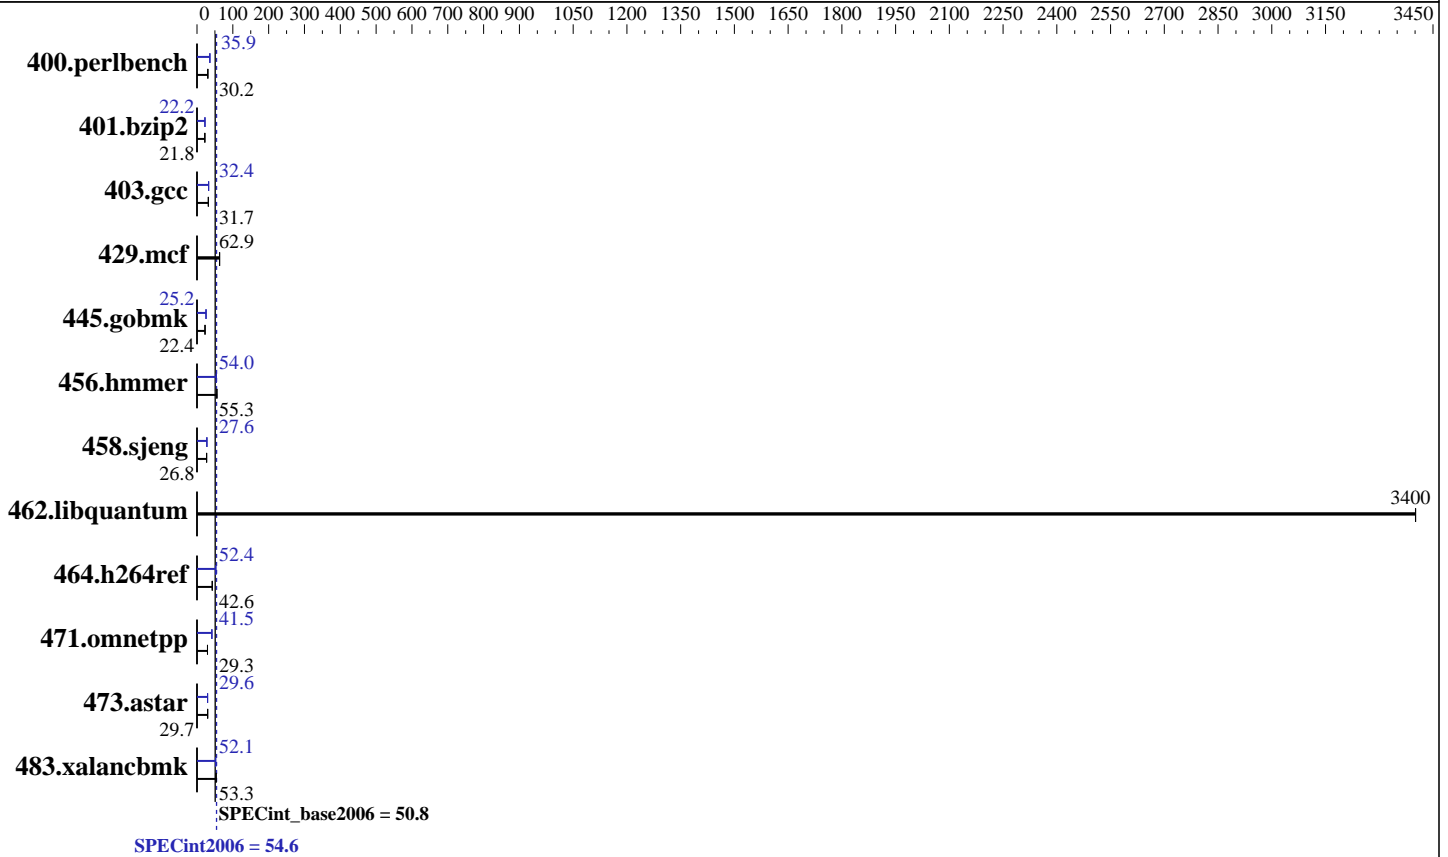

### Hardware

CPU Name: Intel Xeon E5-2470 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 192 GB (12 x 16 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3530 M4  
(Intel Xeon E5-2470 v2, 2.40 GHz)

SPECint2006 = **54.6**

SPECint\_base2006 = **50.8**

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Jan-2014  
Hardware Availability: Mar-2014  
Software Availability: Sep-2013

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	323	30.2	323	30.2	<u>323</u>	<u>30.2</u>	<u>272</u>	<u>35.9</u>	272	36.0	272	35.9
401.bzip2	<u>442</u>	<u>21.8</u>	442	21.9	442	21.8	<u>435</u>	<u>22.2</u>	435	22.2	435	22.2
403.gcc	254	31.7	<u>254</u>	<u>31.7</u>	254	31.7	247	32.5	248	32.4	<u>248</u>	<u>32.4</u>
429.mcf	<u>145</u>	<u>62.9</u>	144	63.5	145	62.7	<u>145</u>	<u>62.9</u>	144	63.5	145	62.7
445.gobmk	<u>468</u>	<u>22.4</u>	467	22.4	468	22.4	416	25.2	<u>416</u>	<u>25.2</u>	416	25.2
456.hammer	<u>169</u>	<u>55.3</u>	168	55.7	169	55.2	174	53.6	<u>173</u>	<u>54.0</u>	172	54.1
458.sjeng	451	26.8	451	26.8	<u>451</u>	<u>26.8</u>	<u>439</u>	<u>27.6</u>	439	27.6	439	27.6
462.libquantum	<u>6.09</u>	<u>3400</u>	6.09	3400	6.09	3400	<u>6.09</u>	<u>3400</u>	6.09	3400	6.09	3400
464.h264ref	520	42.6	519	42.7	<u>519</u>	<u>42.6</u>	422	52.5	422	52.4	<u>422</u>	<u>52.4</u>
471.omnetpp	214	29.2	213	29.4	<u>214</u>	<u>29.3</u>	151	41.5	<u>151</u>	<u>41.5</u>	150	41.6
473.astar	<u>236</u>	<u>29.7</u>	236	29.7	235	29.8	<u>237</u>	<u>29.6</u>	238	29.5	237	29.6
483.xalancbmk	130	53.3	129	53.4	<u>129</u>	<u>53.3</u>	132	52.1	133	52.0	<u>133</u>	<u>52.1</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Zone reclaim mode enabled with:  
echo 1 > /proc/sys/vm/zone\_reclaim\_mode

## Platform Notes

BIOS setting:  
Operating Mode set to Maximum Performance

## General Notes

Environment variables set by runspec before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/home/SPECcpu-new/libs/32:/home/SPECcpu-new/libs/64:/home/SPECcpu-new/sh"  
OMP\_NUM\_THREADS = "20"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3530 M4  
(Intel Xeon E5-2470 v2, 2.40 GHz)

**SPECint2006 = 54.6**

**SPECint\_base2006 = 50.8**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Jan-2014  
**Hardware Availability:** Mar-2014  
**Software Availability:** Sep-2013

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs  
-L/sh -lsmartheap64

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3530 M4  
(Intel Xeon E5-2470 v2, 2.40 GHz)

**SPECint2006 = 54.6**

**SPECint\_base2006 = 50.8**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Jan-2014

**Hardware Availability:** Mar-2014

**Software Availability:** Sep-2013

## Peak Compiler Invocation (Continued)

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

473.astar: `icpc -m64`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

401.bzip2: `-DSPEC_CPU_LP64`

403.gcc: `-DSPEC_CPU_LP64`

429.mcf: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

473.astar: `-DSPEC_CPU_LP64`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-ansi-alias`

401.bzip2: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch  
-ansi-alias`

403.gcc: `-xAVX -ipo -O3 -no-prec-div -inline-calloc  
-opt-malloc-options=3 -auto-ilp32`

429.mcf: `basepeak = yes`

445.gobmk: `-xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias`

456.hmmer: `-xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-ansi-alias`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3530 M4  
(Intel Xeon E5-2470 v2, 2.40 GHz)

**SPECint2006 = 54.6**

**SPECint\_base2006 = 50.8**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Jan-2014  
**Hardware Availability:** Mar-2014  
**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 21:52:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 11 March 2014.