



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu  
Fujitsu SPARC M10-4

SPECfp<sup>®</sup>\_rate2006 = 1750

SPECfp\_rate\_base2006 = 1580

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2014

Hardware Availability: Apr-2014

Software Availability: Feb-2014

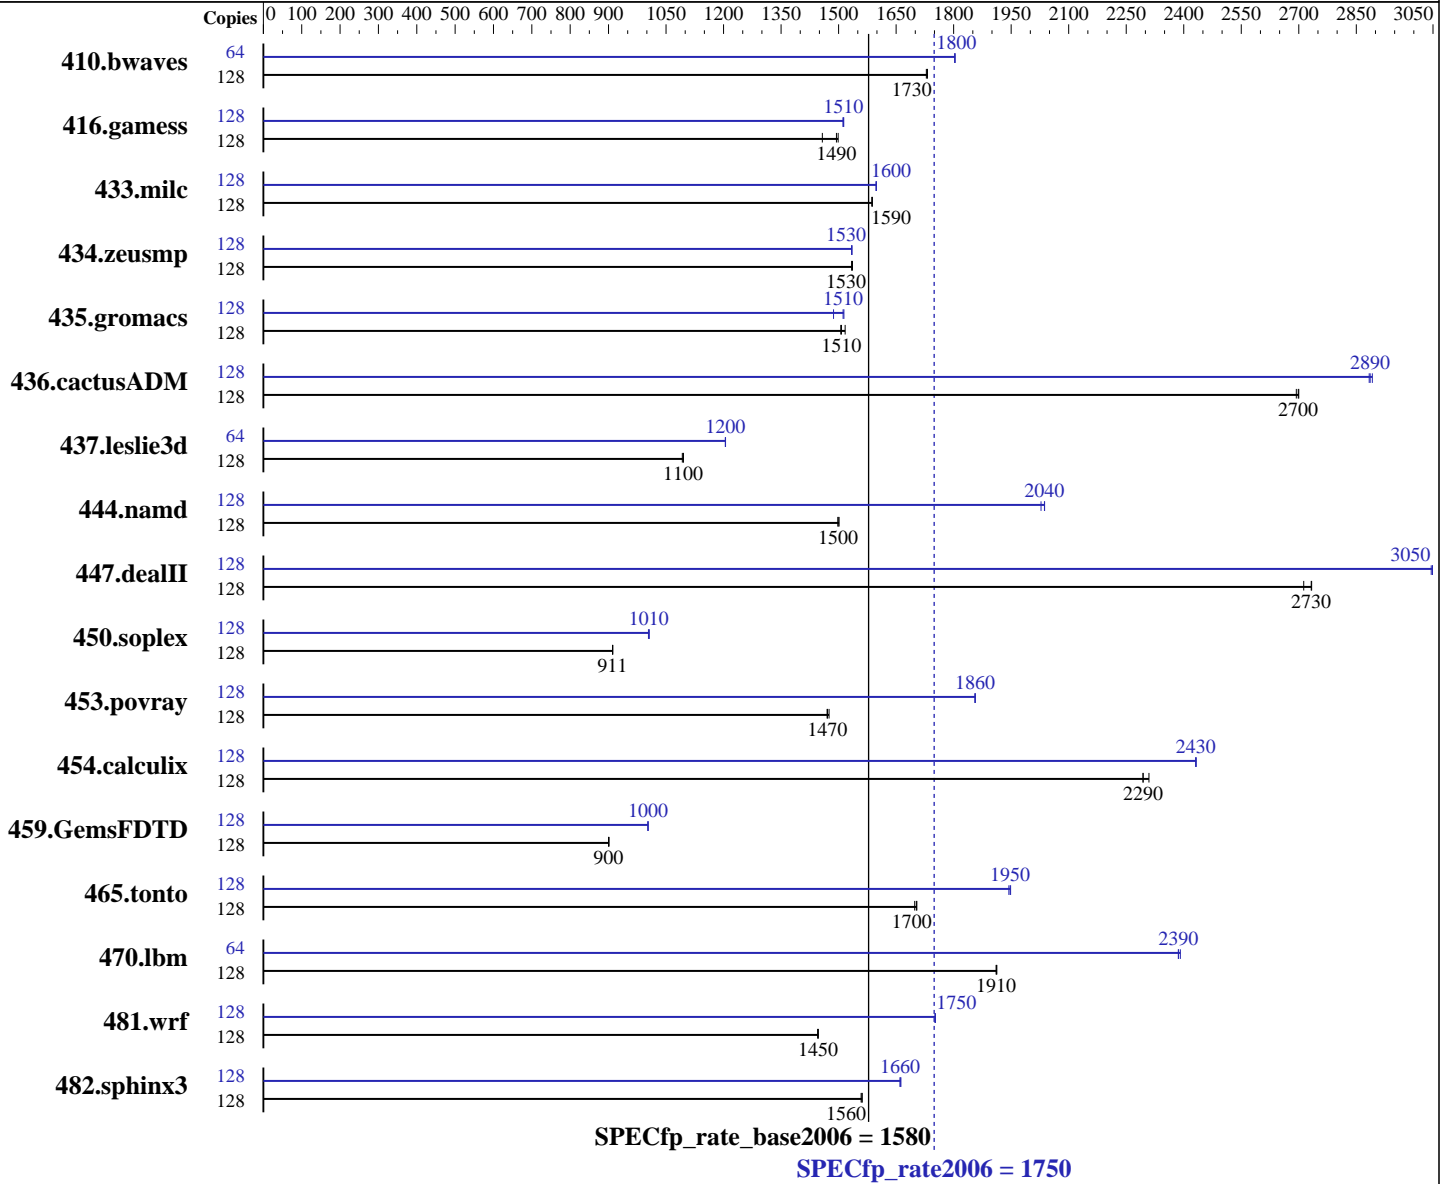

### Hardware

CPU Name: SPARC64 X+  
 CPU Characteristics:  
 CPU MHz: 3400  
 FPU: Integrated  
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip, 2 threads/core  
 CPU(s) orderable: 2 or 4 CPU chips; each CPU chip contains 4, 8, 12, 16 cores  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 24 MB I+D on chip per chip

Continued on next page

### Software

Operating System: Solaris 11.1 SRU 15.4  
 Compiler: C/C++/Fortran: Version 12.3 of Oracle Solaris Studio 10/13 Patch Set  
 Auto Parallel: No  
 File System: tmpfs  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu  
Fujitsu SPARC M10-4

SPECfp\_rate2006 = 1750

SPECfp\_rate\_base2006 = 1580

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Apr-2014  
Hardware Availability: Apr-2014  
Software Availability: Feb-2014

L3 Cache: None  
Other Cache: None  
Memory: 512 GB (32 x 16 GB 2Rx4 PC3L-12800R-11, ECC)  
Disk Subsystem: tmpfs  
600 GB 10,025 RPM Toshiba MBF2600RC SAS (for system disk)  
Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	128	1006	1730	<u>1005</u>	<u>1730</u>	1005	1730	64	482	1800	482	1800	<u>482</u>	<u>1800</u>
416.gamess	128	<u>1677</u>	<u>1490</u>	1672	1500	1719	1460	128	1656	1510	<u>1657</u>	<u>1510</u>	1658	1510
433.milc	128	740	1590	740	1590	<u>740</u>	<u>1590</u>	128	<u>735</u>	<u>1600</u>	735	1600	735	1600
434.zeusmp	128	758	1540	759	1530	<u>759</u>	<u>1530</u>	128	<u>759</u>	<u>1530</u>	759	1530	759	1530
435.gromacs	128	607	1510	602	1520	<u>606</u>	<u>1510</u>	128	604	1510	615	1490	<u>605</u>	<u>1510</u>
436.cactusADM	128	568	2690	567	2700	<u>567</u>	<u>2700</u>	128	529	2890	530	2880	<u>530</u>	<u>2890</u>
437.leslie3d	128	<u>1099</u>	<u>1100</u>	1101	1090	1099	1100	64	499	1200	499	1210	<u>499</u>	<u>1200</u>
444.namd	128	685	1500	684	1500	<u>685</u>	<u>1500</u>	128	504	2040	<u>504</u>	<u>2040</u>	506	2030
447.dealII	128	536	2730	<u>536</u>	<u>2730</u>	540	2710	128	481	3050	<u>480</u>	<u>3050</u>	480	3050
450.soplex	128	1172	911	<u>1172</u>	<u>911</u>	1172	911	128	1063	1000	1061	1010	<u>1062</u>	<u>1010</u>
453.povray	128	<u>463</u>	<u>1470</u>	463	1470	462	1480	128	367	1860	<u>367</u>	<u>1860</u>	367	1860
454.calculix	128	<u>460</u>	<u>2290</u>	460	2290	457	2310	128	434	2430	434	2430	<u>434</u>	<u>2430</u>
459.GemsFDTD	128	<u>1508</u>	<u>900</u>	1507	901	1509	900	128	1354	1000	1355	1000	<u>1354</u>	<u>1000</u>
465.tonto	128	742	1700	739	1700	<u>740</u>	<u>1700</u>	128	648	1940	646	1950	<u>647</u>	<u>1950</u>
470.lbm	128	<u>920</u>	<u>1910</u>	920	1910	920	1910	64	<u>368</u>	<u>2390</u>	368	2390	369	2390
481.wrf	128	<u>988</u>	<u>1450</u>	988	1450	989	1450	128	816	1750	<u>816</u>	<u>1750</u>	816	1750
482.sphinx3	128	<u>1598</u>	<u>1560</u>	1600	1560	1598	1560	128	<u>1502</u>	<u>1660</u>	1503	1660	1501	1660

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

Processes were assigned to specific processors using 'pbind' commands. The config file option 'submit' was used, along with a list of processors in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)

## Operating System Notes

### Shell Environments:

ulimit -s 131072 was used to limit the space consumed by the stack (and therefore make more space available to the heap).

The "Logical Domains Manager" service was turned off using the command "svcadm disable ldmd".

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**  
**Fujitsu SPARC M10-4**

**SPECfp\_rate2006 = 1750**

**SPECfp\_rate\_base2006 = 1580**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Apr-2014  
**Hardware Availability:** Apr-2014  
**Software Availability:** Feb-2014

## Operating System Notes (Continued)

System Tunables:  
(/etc/system parameters)  
autoup = 155200  
Causes pages older than the listed number of seconds to be written by fsflush.  
tune\_t\_fsflushr = 259200  
Controls how many seconds elapse between runs of the page flush daemon, fsflush.

## Platform Notes

Sysinfo program /export/cpu2006-v1.2/config/sysinfo  
\$Rev: 6874 \$ \$Date:: 2013-11-20 # \$ 5ec117938769af2bf59ae0ed87ea9ccd  
running on solaris Mon Apr 14 16:58:47 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /usr/sbin/psrinfo  
SPARC64-X+ (chipid 0, clock 3400 MHz)  
SPARC64-X+ (chipid 1, clock 3400 MHz)  
SPARC64-X+ (chipid 2, clock 3400 MHz)  
SPARC64-X+ (chipid 3, clock 3400 MHz)  
4 chips  
128 threads  
3400 MHz

From kstat: 64 cores

From prtconf: 522240 Megabytes

/etc/release:  
Oracle Solaris 11.1 SPARC  
uname -a:  
SunOS solaris 5.11 11.1 sun4v sparc sun4v

disk: df -h \$SPEC

Filesystem	Size	Used	Available	Capacity	Mounted on
rpool/export	547G	27G	442G	6%	/export

(End of data from sysinfo program)

## General Notes

File System:  
tmpfs: output\_root was used to put run directories in /tmp/cpu2006  
zfs: operating system



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M10-4

SPECfp\_rate2006 = 1750

SPECfp\_rate\_base2006 = 1580

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Apr-2014  
Hardware Availability: Apr-2014  
Software Availability: Feb-2014

## Base Compiler Invocation

C benchmarks:  
cc

C++ benchmarks:  
CC

Fortran benchmarks:  
f90

Benchmarks using both Fortran and C:  
cc f90

## Base Optimization Flags

C benchmarks:  
-fast -xtarget=sparc64x -fma=fused -xpagesize=4M -xipo=2  
-xalias\_level=std -xprefetch\_level=2 -M map.bssalign -lbsdmalloc

C++ benchmarks:  
-fast -xtarget=sparc64x -fma=fused -xpagesize=4M -xipo=2  
-xalias\_level=compatible -library=stdcxx4 -M map.bssalign

Fortran benchmarks:  
-fast -xtarget=sparc64x -fma=fused -xpagesize=4M -xipo=2  
-xvector=%none -M map.bssalign

Benchmarks using both Fortran and C:  
-fast(cc) -fast(f90) -xtarget=sparc64x -fma=fused -xpagesize=4M  
-xipo=2 -xalias\_level=std -xprefetch\_level=2 -xvector=%none  
-M map.bssalign

## Base Other Flags

C benchmarks:  
-xjobs=8

C++ benchmarks:  
-xjobs=8

Fortran benchmarks:  
-xjobs=8

Benchmarks using both Fortran and C:  
-xjobs=8



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu  
Fujitsu SPARC M10-4

SPECfp\_rate2006 = 1750

SPECfp\_rate\_base2006 = 1580

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Apr-2014  
Hardware Availability: Apr-2014  
Software Availability: Feb-2014

## Peak Compiler Invocation

C benchmarks:  
cc

C++ benchmarks:  
CC

Fortran benchmarks:  
f90

Benchmarks using both Fortran and C:  
cc f90

## Peak Optimization Flags

C benchmarks:

```
433.milc: -fast -xtarget=sparc64x -fma=fused -xpagesize=4M -xipo=2
-xalias_level=std -fsimple=1 -W2,-Ainline:rs=400
-Qoption cg -Qms_pipe+alldoall
-Wc,-Qpeep-Ex:minmax_use_cmov=2 -Wc,-Qms_pipe+ulmssc=1
-W2,-Asac -M map.bssalign
```

```
470.lbm: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xpagesize=4M -xipo=2 -xalias_level=std
-xprefetch_level=2 -xpagesize=256M -M map.256M.align
-lbsdmalloc
```

```
482.sphinx3: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xpagesize=4M -xipo=2 -xunroll=8
-xprefetch=latx:0.6 -M map.bssalign -lbsdmalloc
```

C++ benchmarks:

```
444.namd: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xpagesize=4M -xalias_level=compatible
-xprefetch=no%auto -Qoption cg -Qms_pipe+alldoall
-library=stlport4 -M map.bssalign
```

```
447.dealIII: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xpagesize=4M -xipo=1 -xalias_level=compatible
-xrestrict -xprefetch=no%auto -library=stdcxx4
-M map.bssalign
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M10-4

SPECfp\_rate2006 = 1750

SPECfp\_rate\_base2006 = 1580

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Apr-2014  
Hardware Availability: Apr-2014  
Software Availability: Feb-2014

## Peak Optimization Flags (Continued)

450.soplex: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x  
-fma=fused -xpagesize=4M -library=stlport4 -xO3 -xunroll=8  
-xrestrict -Qoption cg -Qlp-ol=1 -Qoption cg -Qlp-it=3  
-Qoption cg -Qlp-imb=1 -Qoption iropt -Apf:pdl=3  
-xprefetch=latx:0.2 -M map.bssalign -lbsdmalloc

453.povray: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x  
-fma=fused -xpagesize=4M -xO4 -xipo=2  
-xalias\_level=compatible -xlinkopt=2 -xprefetch=no%auto  
-xunroll=7 -Qoption iropt -Ainline:rs=1024  
-Qoption iropt -Ainline:cs=1024  
-Qoption iropt -Ainline:inc=900  
-Wc,-Qpeep-Ex:minmax\_use\_cmov=2 -Wc,-Qms\_pipe+ulmscc=1  
-library=stlport4 -M map.bssalign -lfast

### Fortran benchmarks:

410.bwaves: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x  
-fma=fused -xpagesize=4M -xipo=2 -xunroll=4 -xvector=%none  
-xprefetch=no%auto -M map.bssalign

416.gamess: -fast -xtarget=sparc64x -fma=fused -xpagesize=4M -xipo=1  
-xprefetch=no%auto -xunroll=6 -M map.bssalign

434.zeusmp: -fast -xtarget=sparc64x -fma=fused -xpagesize=4M  
-xvector=%none -M map.bssalign

437.leslie3d: -fast -xtarget=sparc64x -fma=fused -xpagesize=4M  
-xunroll=2 -xvector=%none -xprefetch=latx:0.8  
-Qoption cg -Qms\_pipe+alldoall -M map.bssalign

459.GemsFDTD: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x  
-fma=fused -xpagesize=4M -xunroll=9 -xprefetch=latx:0.2  
-xprefetch\_level=3 -Qoption cg -Qlp-av=128  
-Qoption iropt -Rujam -M map.bssalign

465.tonto: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x  
-fma=fused -xpagesize=4M -xipo=1 -xO4 -xunroll=3  
-xprefetch=no%auto -M map.bssalign -lbsdmalloc

### Benchmarks using both Fortran and C:

435.gromacs: -fast(cc) -fast(f90) -xtarget=sparc64x -fma=fused  
-xpagesize=4M -xipo=2 -xalias\_level=std -xprefetch\_level=2  
-xvector=%none -M map.bssalign

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M10-4

SPECfp\_rate2006 = 1750

SPECfp\_rate\_base2006 = 1580

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2014

Hardware Availability: Apr-2014

Software Availability: Feb-2014

## Peak Optimization Flags (Continued)

436.cactusADM: -fast(cc) -fast(f90) -xtarget=sparc64x -fma=fused  
-xpagesize=4M -xO4 -xunroll=16 -xprefetch=latx:1.4  
-Wc,-Qpeep-Ex:minmax\_use\_cmov=2 -Wc,-Qms\_pipe+ulmssc=1  
-W2,-Asac -M map.256M.align -lbsdmalloc

454.calculix: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)  
-xtarget=sparc64x -fma=fused -xpagesize=4M -xipo=1  
-xalias\_level=strong -xprefetch=latx:2.0 -stackvar  
-M map.bssalign

481.wrf: -fast(cc) -fast(f90) -xtarget=sparc64x -fma=fused  
-xpagesize=4M -xunroll=9 -xprefetch=latx:0.4  
-Qoption iropt -Rujam -xO4 -M map.bssalign

## Peak Other Flags

C benchmarks:  
-xjobs=8

C++ benchmarks:  
-xjobs=8

Fortran benchmarks:  
-xjobs=8

Benchmarks using both Fortran and C:  
-xjobs=8

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.3-SPARC64X.20140423.html>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Mseries.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.3-SPARC64X.20140423.xml>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Mseries.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu  
Fujitsu SPARC M10-4

SPECfp\_rate2006 = 1750

SPECfp\_rate\_base2006 = 1580

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Apr-2014  
Hardware Availability: Apr-2014  
Software Availability: Feb-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Fri Jul 25 00:01:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 9 May 2014.