



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Quanta Computer Inc.

SPECfp®_rate2006 = 1740

Quanta Q71L-4U(Intel Xeon E7-4890 v2)

SPECfp_rate_base2006 = 1700

CPU2006 license: 9050


Test date: Jun-2014

Test sponsor: Quanta Computer Inc.

Hardware Availability: Jun-2014

Tested by: Quanta Computer Inc.

Software Availability: Nov-2013

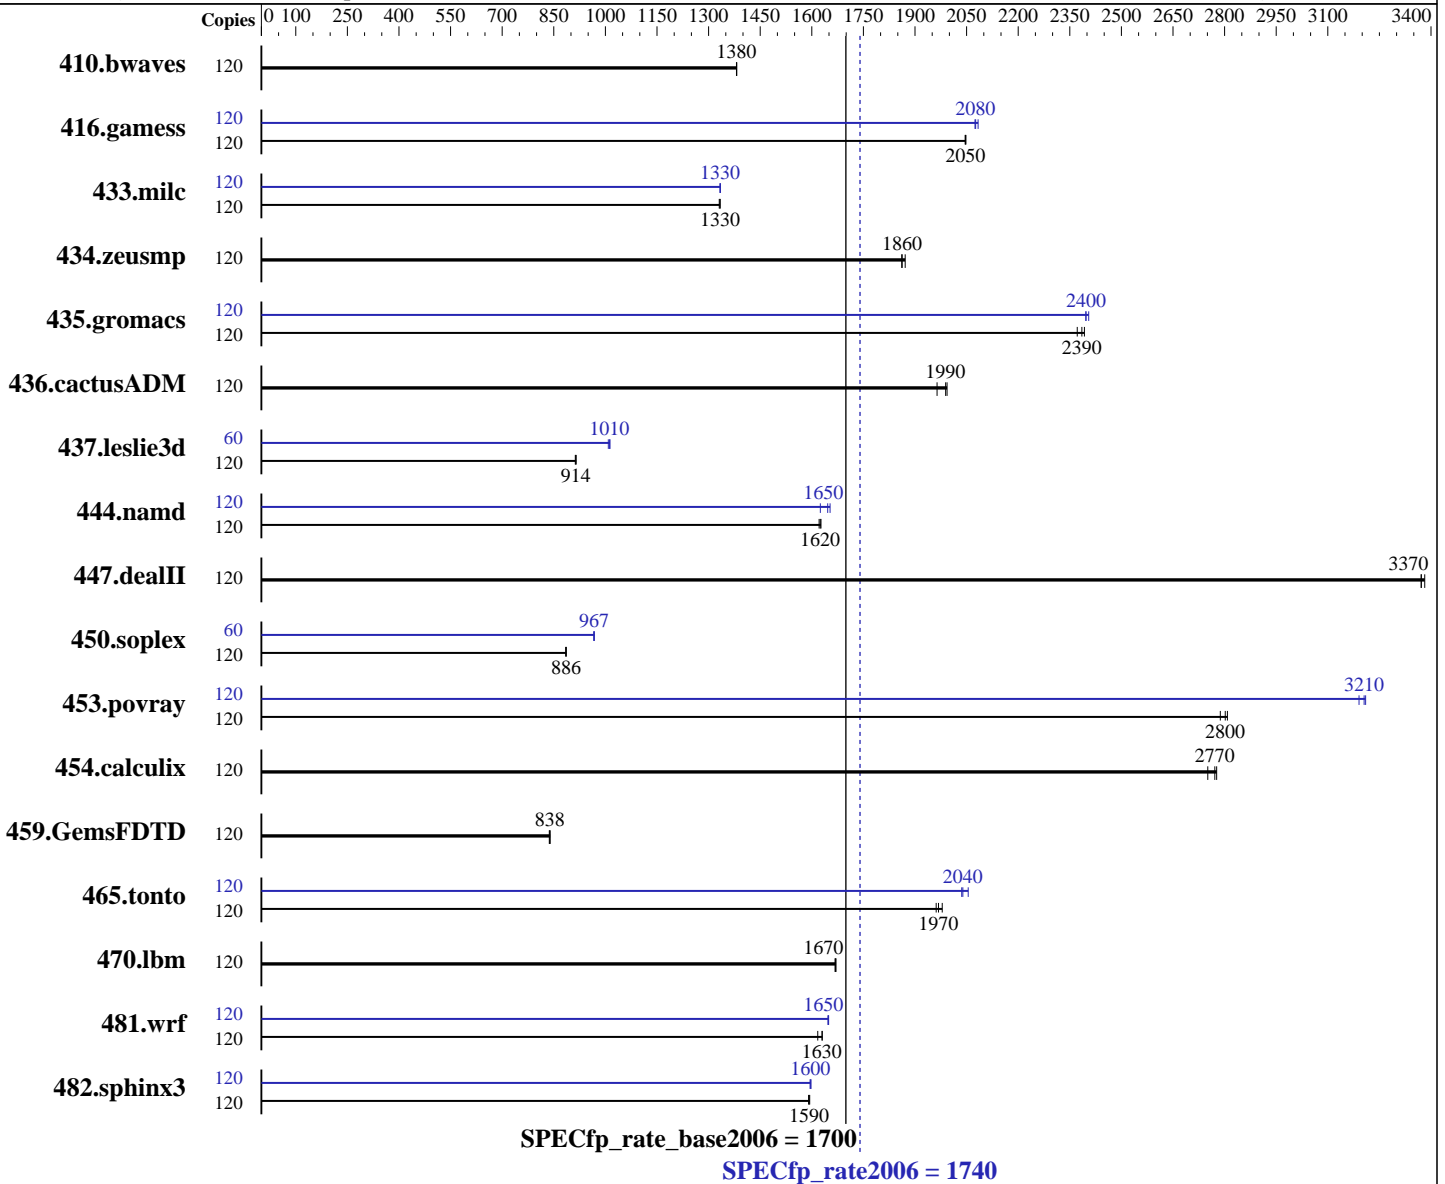

Hardware

CPU Name: Intel Xeon E7-4890 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 60 cores, 4 chips, 15 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2,3,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Quanta Computer Inc.

SPECfp_rate2006 = 1740

Quanta Q71L-4U(Intel Xeon E7-4890 v2)

SPECfp_rate_base2006 = 1700

CPU2006 license: 9050

Test date: Jun-2014

Test sponsor: Quanta Computer Inc.

Hardware Availability: Jun-2014

Tested by: Quanta Computer Inc.

Software Availability: Nov-2013

L3 Cache: 37.5 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (64 x 8 GB 2Rx4 PC3-10600R-13, ECC)
Disk Subsystem: 394 GB add more disk info here
Other Hardware: None

System State: Run level 3 (Multi-user mode)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	120	1180	1380	1181	1380	1180	1380	120	1180	1380	1181	1380	1180	1380
416.gamess	120	1147	2050	1148	2050	1148	2050	120	1128	2080	1132	2080	1133	2070
433.milc	120	826	1330	826	1330	828	1330	120	826	1330	826	1330	826	1330
434.zeusmp	120	587	1860	586	1860	583	1870	120	587	1860	586	1860	583	1870
435.gromacs	120	359	2390	358	2390	361	2370	120	357	2400	356	2400	358	2400
436.cactusADM	120	719	1990	730	1960	721	1990	120	719	1990	730	1960	721	1990
437.leslie3d	120	1234	914	1236	913	1233	915	60	559	1010	557	1010	557	1010
444.namd	120	592	1620	592	1630	594	1620	120	592	1620	585	1650	582	1650
447.dealII	120	406	3380	407	3370	407	3370	120	406	3380	407	3370	407	3370
450.soplex	120	1131	885	1130	886	1129	886	60	517	967	517	968	518	966
453.povray	120	227	2810	229	2790	228	2800	120	199	3210	199	3210	200	3190
454.calculix	120	357	2780	360	2750	357	2770	120	357	2780	360	2750	357	2770
459.GemsFDTD	120	1521	837	1519	838	1517	839	120	1521	837	1519	838	1517	839
465.tonto	120	597	1980	600	1970	602	1960	120	575	2050	579	2040	580	2040
470.lbm	120	989	1670	988	1670	987	1670	120	989	1670	988	1670	987	1670
481.wrf	120	829	1620	822	1630	822	1630	120	814	1650	813	1650	813	1650
482.sphinx3	120	1470	1590	1467	1590	1469	1590	120	1465	1600	1464	1600	1466	1590

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /root/speccpu_linux/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Sat Jun 21 08:02:53 2014

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Quanta Computer Inc.

SPECfp_rate2006 = 1740

Quanta Q71L-4U(Intel Xeon E7-4890 v2)

SPECfp_rate_base2006 = 1700

CPU2006 license: 9050

Test sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test date: Jun-2014

Hardware Availability: Jun-2014

Software Availability: Nov-2013

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) CPU E7-4890 v2 @ 2.80GHz
 4 "physical id"s (chips)
 120 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores      : 15
siblings       : 30
physical 0:    cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
physical 1:    cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
physical 2:    cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
physical 3:    cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
```

cache size : 38400 KB

From /proc/meminfo

```
MemTotal:      529144892 kB
HugePages_Total: 1
Hugepagesize:   2048 kB
```

/usr/bin/lsb_release -d

Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*

```
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54
EST 2013 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jun 20 19:31

SPEC is set to: /root/speccpu_linux

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext4  394G  113G  262G  31% /
```

Additional information from dmidecode:

BIOS American Megatrends Inc. S4L_3A06 04/18/2014

Memory:

32x NO DIMM NO DIMM

64x Samsung M393B1K70CH0-CH9 8 GB 1333 MHz 2 rank

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Quanta Computer Inc.

SPECfp_rate2006 = 1740

Quanta Q71L-4U(Intel Xeon E7-4890 v2)

SPECfp_rate_base2006 = 1700

CPU2006 license: 9050

Test date: Jun-2014

Test sponsor: Quanta Computer Inc.

Hardware Availability: Jun-2014

Tested by: Quanta Computer Inc.

Software Availability: Nov-2013

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/speccpu_linux/libs/32:/root/speccpu_linux/libs/64:/root/speccpu_linux/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Quanta Computer Inc.

SPECfp_rate2006 = 1740

Quanta Q71L-4U(Intel Xeon E7-4890 v2)

SPECfp_rate_base2006 = 1700

CPU2006 license: 9050

Test date: Jun-2014

Test sponsor: Quanta Computer Inc.

Hardware Availability: Jun-2014

Tested by: Quanta Computer Inc.

Software Availability: Nov-2013

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

447.deallI: -DSPEC_CPU_LP64

453.povray: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Quanta Computer Inc.

SPECfp_rate2006 = 1740

Quanta Q71L-4U(Intel Xeon E7-4890 v2)

SPECfp_rate_base2006 = 1700

CPU2006 license: 9050

Test date: Jun-2014

Test sponsor: Quanta Computer Inc.

Hardware Availability: Jun-2014

Tested by: Quanta Computer Inc.

Software Availability: Nov-2013

Peak Portability Flags (Continued)

454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
 -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Quanta Computer Inc.

SPECfp_rate2006 = 1740

Quanta Q71L-4U(Intel Xeon E7-4890 v2)

SPECfp_rate_base2006 = 1700

CPU2006 license: 9050

Test sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test date: Jun-2014

Hardware Availability: Jun-2014

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Quanta-Computer-Inc-Platform-Settings-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Quanta-Computer-Inc-Platform-Settings-V1.0.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Fri Aug 15 17:46:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 15 August 2014.