



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

**SPECint®2006 = 36.7**

Intel DQ77MK motherboard (Intel Pentium G2010)

**SPECint\_base2006 = 34.8**

CPU2006 license: 13


Test date: Nov-2013

Test sponsor: Intel Corporation

Hardware Availability: Jan-2013

Tested by: Intel Corporation

Software Availability: Apr-2013

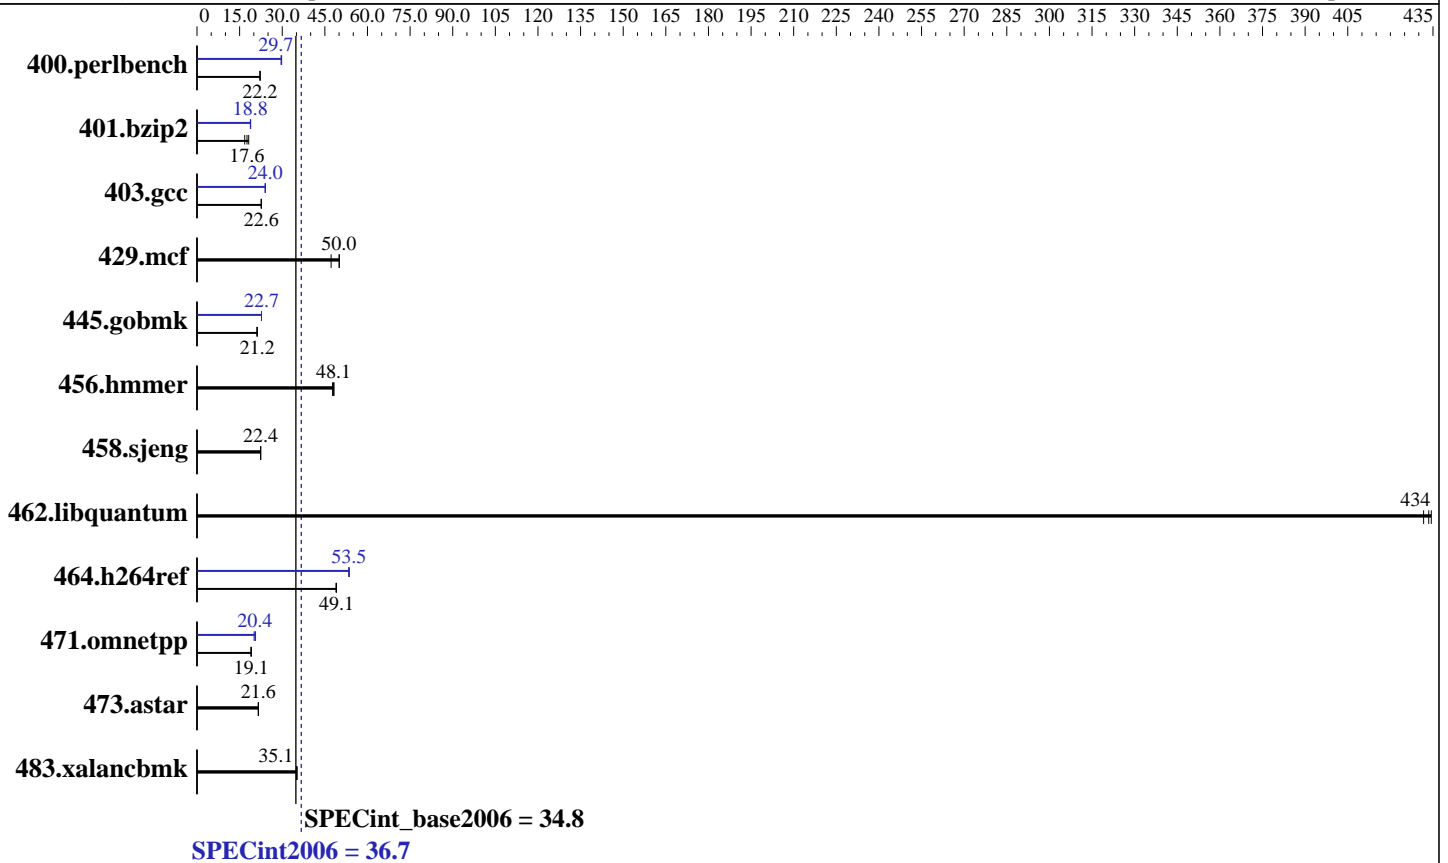

### Hardware

CPU Name: Intel Pentium G2010  
 CPU Characteristics: 2800  
 CPU MHz: Integrated  
 FPU: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) enabled: 1 chip  
 CPU(s) orderable: 32 KB I + 32 KB D on chip per core  
 Primary Cache: 256 KB I+D on chip per core  
 Secondary Cache: 3 MB I+D on chip per chip  
 L3 Cache: None  
 Other Cache: None  
 Memory: 4 GB (2 x 2 GB 1Rx8 PC3-12800U-11, running at 1333 MHz and CL9)  
 Disk Subsystem: 250 GB Seagate SATA HDD, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Microsoft Windows 7 Enterprise 6.1.7601 Service Pack 1 Build 7601  
 Compiler: C/C++: Version 13.1.1.171 of Intel C++ Studio XE for Windows;  
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1  
 Auto Parallel: Yes  
 File System: NTFS  
 System State: Default  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

SPECint2006 = **36.7**

Intel DQ77MK motherboard (Intel Pentium G2010)

SPECint\_base2006 = **34.8**

CPU2006 license: 13

Test date: Nov-2013

Test sponsor: Intel Corporation

Hardware Availability: Jan-2013

Tested by: Intel Corporation

Software Availability: Apr-2013

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<b>440</b>	<b>22.2</b>	440	22.2	440	22.2	330	29.6	328	29.8	<b>329</b>	<b>29.7</b>
401.bzip2	<b>549</b>	<b>17.6</b>	575	16.8	530	18.2	513	18.8	<b>513</b>	<b>18.8</b>	512	18.9
403.gcc	357	22.6	355	22.7	<b>356</b>	<b>22.6</b>	335	24.0	335	24.1	<b>335</b>	<b>24.0</b>
429.mcf	182	50.1	193	47.2	<b>182</b>	<b>50.0</b>	182	50.1	193	47.2	<b>182</b>	<b>50.0</b>
445.gobmk	496	21.1	<b>495</b>	<b>21.2</b>	495	21.2	<b>462</b>	<b>22.7</b>	462	22.7	462	22.7
456.hammer	196	47.7	<b>194</b>	<b>48.1</b>	193	48.2	196	47.7	<b>194</b>	<b>48.1</b>	193	48.2
458.sjeng	<b>540</b>	<b>22.4</b>	540	22.4	539	22.4	<b>540</b>	<b>22.4</b>	540	22.4	539	22.4
462.libquantum	<b>47.8</b>	<b>434</b>	48.0	432	47.7	434	<b>47.8</b>	<b>434</b>	48.0	432	47.7	434
464.h264ref	453	48.9	450	49.1	<b>450</b>	<b>49.1</b>	<b>414</b>	<b>53.5</b>	413	53.6	414	53.4
471.omnetpp	328	19.0	328	19.1	<b>328</b>	<b>19.1</b>	304	20.6	310	20.1	<b>306</b>	<b>20.4</b>
473.astar	<b>325</b>	<b>21.6</b>	325	21.6	325	21.6	<b>325</b>	<b>21.6</b>	325	21.6	325	21.6
483.xalancbmk	197	35.1	196	35.2	<b>197</b>	<b>35.1</b>	197	35.1	196	35.2	<b>197</b>	<b>35.1</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

To compile these binaries, the Intel Compiler 13.1 was set up to generate 64-bit binaries with the command:  
"ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

## Platform Notes

Sysinfo program C:\SPEC13.1\Docs\sysinfo  
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c  
running on Clt7054D217ADD3 Fri Nov 22 20:45:30 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
Trying 'systeminfo'
OS Name       : Microsoft Windows 7 Enterprise
OS Version    : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: INTEL_
System Model   : DQ77MK_
Processor(s)  : 1 Processor(s) Installed.
               [01]: Intel64 Family 6 Model 58 Stepping 9 GenuineIntel ~2800 Mhz
BIOS Version  : Intel Corp. MKQ7710H.86A.0054.2012.1120.1444, 11/20/2012
Total Physical Memory: 3,912 MB
```

```
Trying 'wmic cpu get /value'
DeviceID      : CPU0
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 36.7

Intel DQ77MK motherboard (Intel Pentium G2010)

SPECint\_base2006 = 34.8

CPU2006 license: 13

Test date: Nov-2013

Test sponsor: Intel Corporation

Hardware Availability: Jan-2013

Tested by: Intel Corporation

Software Availability: Apr-2013

## Platform Notes (Continued)

```

L2CacheSize      : 512
L3CacheSize      : 3072
MaxClockSpeed    : 2800
Name              : Intel(R) Pentium(R) CPU G2010 @ 2.80GHz
NumberOfCores     : 2
NumberOfLogicalProcessors: 2

```

(End of data from sysinfo program)

BIOS: SATA mode set to RAID

Windows Disk Driver: Intel Rapid Storage Technology 12.5.0.1066

Windows Chipset Driver: Intel Chipset Driver 9.4.0.1027

## Component Notes

Tested systems can be used with Shin-G ATX case,  
 PC Power and Cooling 1200W power supply  
 Micron MT8JTF25664AZ-1G6 Series Memory DIMMs

## General Notes

OMP\_NUM\_THREADS set to number of processors cores  
 KMP\_AFFINITY set to granularity=fine,scatter  
 Binaries compiled on a system with 1x Intel Core i7-860 CPU  
 + 8GB memory using Windows 7 Enterprise 64-bit

## Base Compiler Invocation

C benchmarks:

```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc10
```

## Base Portability Flags

```

400.perlbench: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64_X64
               -DSPEC_CPU_NO_NEED_VA_COPY
401.bzip2: -DSPEC_CPU_P64
403.gcc: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64
429.mcf: -DSPEC_CPU_P64
445.gobmk: -DSPEC_CPU_P64
456.hmmmer: -DSPEC_CPU_P64
458.sjeng: -DSPEC_CPU_P64
462.libquantum: -DSPEC_CPU_P64
464.h264ref: -DSPEC_CPU_P64 -DWIN32 -DSPEC_CPU_NO_INTTYPES

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 36.7

Intel DQ77MK motherboard (Intel Pentium G2010)

SPECint\_base2006 = 34.8

CPU2006 license: 13

Test date: Nov-2013

Test sponsor: Intel Corporation

Hardware Availability: Jan-2013

Tested by: Intel Corporation

Software Availability: Apr-2013

## Base Portability Flags (Continued)

471.omnetpp: -DSPEC\_CPU\_P64 -DSPEC\_CPU\_WIN64  
473.astar: -DSPEC\_CPU\_P64  
483.xalancbmk: -DSPEC\_CPU\_P64 -Qoption,cpp,--no\_wchar\_t\_keyword

## Base Optimization Flags

C benchmarks:  
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel  
-Qauto-ilp32 /F512000000

C++ benchmarks:  
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features  
-Qauto-ilp32 /F512000000 shlw64M.lib -link /FORCE:MULTIPLE

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks:  
icl -Qvc10 -Qstd=c99

C++ benchmarks:  
icl -Qvc10

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:  
400.perlbench: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
-Qauto-ilp32 /F512000000 shlw64M.lib  
-link /FORCE:MULTIPLE

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 36.7

Intel DQ77MK motherboard (Intel Pentium G2010)

SPECint\_base2006 = 34.8

CPU2006 license: 13

Test date: Nov-2013

Test sponsor: Intel Corporation

Hardware Availability: Jan-2013

Tested by: Intel Corporation

Software Availability: Apr-2013

## Peak Optimization Flags (Continued)

401.bzip2: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias  
-Qauto-ilp32 /F512000000

403.gcc: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qauto-ilp32 /F512000000

429.mcf: basepeak = yes

445.gobmk: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O2 -Qprec-div- -Qansi-alias -Qauto-ilp32  
/F512000000

456.hmmr: basepeak = yes

458.sjeng: basepeak = yes

462.libquantum: basepeak = yes

464.h264ref: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias  
-Qauto-ilp32 /F512000000

C++ benchmarks:

471.omnetpp: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias  
-Qopt-ra-region-strategy=block -Qauto-ilp32 /F512000000  
shlW64M.lib -link /FORCE:MULTIPLE

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 36.7

Intel DQ77MK motherboard (Intel Pentium G2010)

SPECint\_base2006 = 34.8

CPU2006 license: 13

Test date: Nov-2013

Test sponsor: Intel Corporation

Hardware Availability: Jan-2013

Tested by: Intel Corporation

Software Availability: Apr-2013

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Fri Jul 25 00:49:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 July 2014.