



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

**SPECint®2006 = 38.8**

Intel DQ87PG motherboard (Intel Celeron G1830)

**SPECint\_base2006 = 37.2**

CPU2006 license: 13


Test date: Feb-2014

Test sponsor: Intel Corporation

Hardware Availability: Dec-2013

Tested by: Intel Corporation

Software Availability: Apr-2013

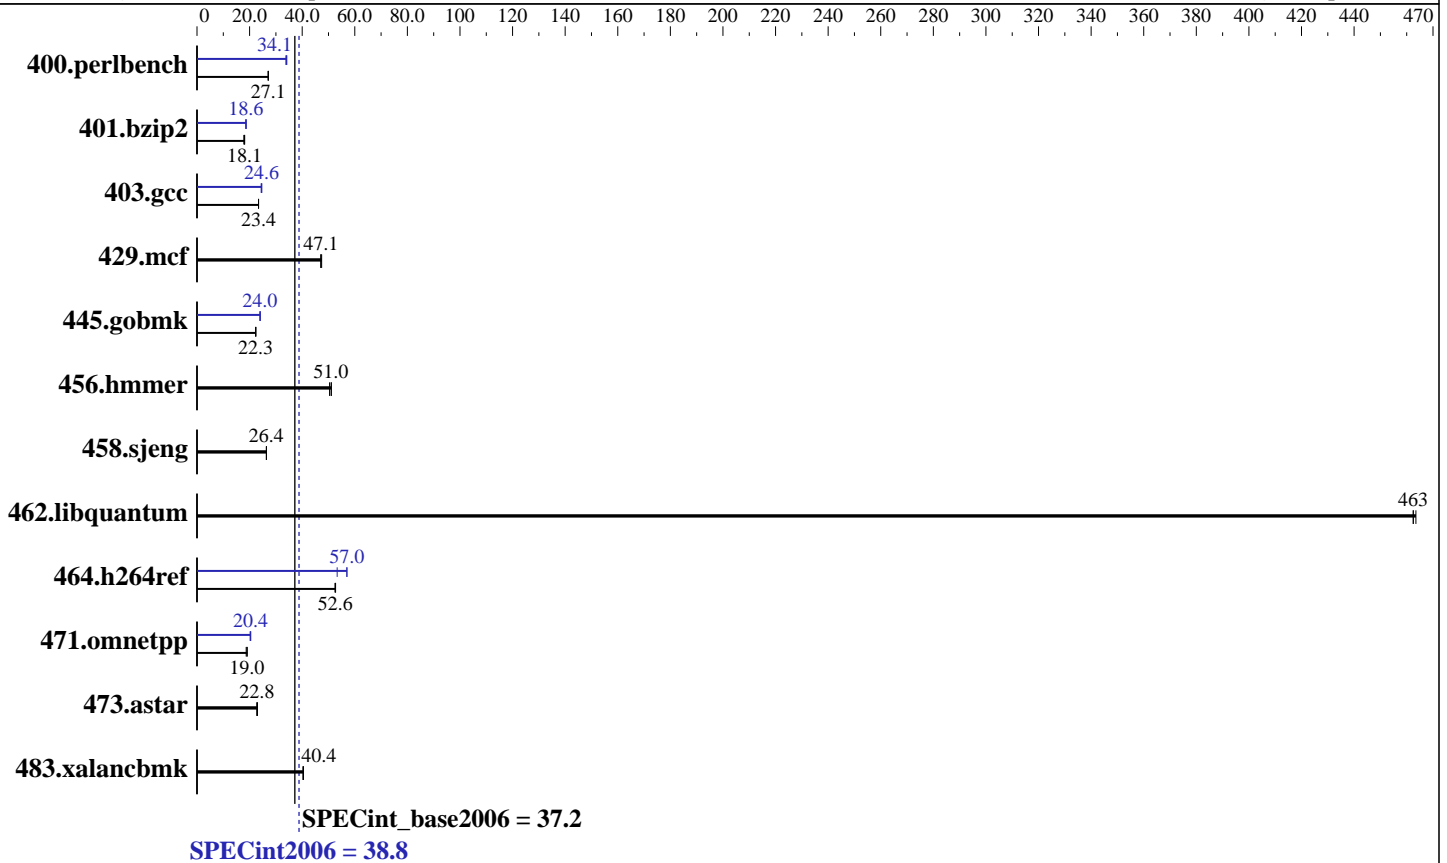

### Hardware

CPU Name: Intel Celeron G1830  
 CPU Characteristics: 2800  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 2 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 4 GB (2 x 2 GB 1Rx8 PC3-12800U-11, running at 1333 MHz and CL9)  
 Disk Subsystem: 250 GB Seagate SATA HDD, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Microsoft Windows 7 Enterprise 6.1.7601 Service Pack 1 Build 7601  
 Compiler: C/C++: Version 13.1.1.171 of Intel C++ Studio XE for Windows;  
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1  
 Auto Parallel: Yes  
 File System: NTFS  
 System State: Default  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 38.8

Intel DQ87PG motherboard (Intel Celeron G1830)

SPECint\_base2006 = 37.2

CPU2006 license: 13

Test date: Feb-2014

Test sponsor: Intel Corporation

Hardware Availability: Dec-2013

Tested by: Intel Corporation

Software Availability: Apr-2013

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	361	27.1	<b>361</b>	<b>27.1</b>	361	27.1	289	33.8	286	34.1	<b>286</b>	<b>34.1</b>
401.bzip2	543	17.8	<b>533</b>	<b>18.1</b>	533	18.1	519	18.6	517	18.7	<b>518</b>	<b>18.6</b>
403.gcc	344	23.4	344	23.4	<b>344</b>	<b>23.4</b>	330	24.4	327	24.6	<b>327</b>	<b>24.6</b>
429.mcf	<b>194</b>	<b>47.1</b>	192	47.4	194	47.1	<b>194</b>	<b>47.1</b>	192	47.4	194	47.1
445.gobmk	471	22.3	469	22.4	<b>470</b>	<b>22.3</b>	<b>437</b>	<b>24.0</b>	437	24.0	436	24.0
456.hammer	<b>183</b>	<b>51.0</b>	185	50.4	183	51.1	<b>183</b>	<b>51.0</b>	185	50.4	183	51.1
458.sjeng	458	26.4	459	26.4	<b>458</b>	<b>26.4</b>	458	26.4	459	26.4	<b>458</b>	<b>26.4</b>
462.libquantum	44.7	464	<b>44.8</b>	<b>463</b>	44.8	463	44.7	464	<b>44.8</b>	<b>463</b>	44.8	463
464.h264ref	420	52.7	421	52.5	<b>420</b>	<b>52.6</b>	388	57.0	415	53.3	<b>388</b>	<b>57.0</b>
471.omnetpp	328	19.1	<b>329</b>	<b>19.0</b>	334	18.7	309	20.2	306	20.4	<b>306</b>	<b>20.4</b>
473.astar	<b>308</b>	<b>22.8</b>	308	22.8	305	23.0	<b>308</b>	<b>22.8</b>	308	22.8	305	23.0
483.xalancbmk	<b>171</b>	<b>40.4</b>	170	40.5	171	40.3	<b>171</b>	<b>40.4</b>	170	40.5	171	40.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

To compile these binaries, the Intel Compiler 13.1 was set up to generate 64-bit binaries with the command:  
"ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

## Platform Notes

Sysinfo program C:\SPEC13.1\Docs\sysinfo  
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c  
running on Clt7C05070FB382 Wed Feb 12 23:18:37 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
Trying 'systeminfo'
OS Name       : Microsoft Windows 7 Enterprise
OS Version    : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: INTEL_
System Model   : DQ87PG__
Processor(s)  : 1 Processor(s) Installed.
               [01]: Intel64 Family 6 Model 60 Stepping 3 GenuineIntel ~2800 Mhz
BIOS Version  : Intel(R) Corp. PGQ8710H.86A.0036.2013.0702.1908, 7/2/2013
Total Physical Memory: 3,749 MB
```

```
Trying 'wmic cpu get /value'
DeviceID      : CPU0
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 38.8

Intel DQ87PG motherboard (Intel Celeron G1830)

SPECint\_base2006 = 37.2

CPU2006 license: 13

Test date: Feb-2014

Test sponsor: Intel Corporation

Hardware Availability: Dec-2013

Tested by: Intel Corporation

Software Availability: Apr-2013

## Platform Notes (Continued)

```

L2CacheSize      : 512
L3CacheSize      : 2048
MaxClockSpeed    : 2800
Name              : Intel(R) Celeron(R) CPU G1830 @ 2.80GHz
NumberOfCores    : 2
NumberOfLogicalProcessors: 2

```

(End of data from sysinfo program)

BIOS: SATA mode set to RAID

Windows Disk Driver: Intel Rapid Storage Technology 12.5.0.1066

Windows Chipset Driver: Intel Chipset Driver 9.4.0.1027

## Component Notes

Tested systems can be used with Shin-G ATX case,  
 PC Power and Cooling 1200W power supply  
 Micron MT8JTF25664AZ-1G6 Series Memory DIMMs

## General Notes

OMP\_NUM\_THREADS set to number of processors cores  
 KMP\_AFFINITY set to granularity=fine,scatter  
 Binaries compiled on a system with 1x Intel Core i7-860 CPU  
 + 8GB memory using Windows 7 Enterprise 64-bit

## Base Compiler Invocation

C benchmarks:

```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc10
```

## Base Portability Flags

```

400.perlbench: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64_X64
               -DSPEC_CPU_NO_NEED_VA_COPY
401.bzip2: -DSPEC_CPU_P64
403.gcc: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64
429.mcf: -DSPEC_CPU_P64
445.gobmk: -DSPEC_CPU_P64
456.hmmer: -DSPEC_CPU_P64
458.sjeng: -DSPEC_CPU_P64
462.libquantum: -DSPEC_CPU_P64
464.h264ref: -DSPEC_CPU_P64 -DWIN32 -DSPEC_CPU_NO_INTTYPES

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 38.8

Intel DQ87PG motherboard (Intel Celeron G1830)

SPECint\_base2006 = 37.2

CPU2006 license: 13

Test date: Feb-2014

Test sponsor: Intel Corporation

Hardware Availability: Dec-2013

Tested by: Intel Corporation

Software Availability: Apr-2013

## Base Portability Flags (Continued)

471.omnetpp: -DSPEC\_CPU\_P64 -DSPEC\_CPU\_WIN64  
473.astar: -DSPEC\_CPU\_P64  
483.xalancbmk: -DSPEC\_CPU\_P64 -Qoption,cpp,--no\_wchar\_t\_keyword

## Base Optimization Flags

C benchmarks:  
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel  
-Qauto-ilp32 /F512000000

C++ benchmarks:  
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features  
-Qauto-ilp32 /F512000000 shlw64M.lib -link /FORCE:MULTIPLE

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks:  
icl -Qvc10 -Qstd=c99

C++ benchmarks:  
icl -Qvc10

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:  
400.perlbench: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
-Qauto-ilp32 /F512000000 shlw64M.lib  
-link /FORCE:MULTIPLE

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 38.8

Intel DQ87PG motherboard (Intel Celeron G1830)

SPECint\_base2006 = 37.2

CPU2006 license: 13

Test date: Feb-2014

Test sponsor: Intel Corporation

Hardware Availability: Dec-2013

Tested by: Intel Corporation

Software Availability: Apr-2013

## Peak Optimization Flags (Continued)

401.bzip2: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias  
-Qauto-ilp32 /F512000000

403.gcc: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qauto-ilp32 /F512000000

429.mcf: basepeak = yes

445.gobmk: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O2 -Qprec-div- -Qansi-alias -Qauto-ilp32  
/F512000000

456.hmmr: basepeak = yes

458.sjeng: basepeak = yes

462.libquantum: basepeak = yes

464.h264ref: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias  
-Qauto-ilp32 /F512000000

C++ benchmarks:

471.omnetpp: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias  
-Qopt-ra-region-strategy=block -Qauto-ilp32 /F512000000  
shlW64M.lib -link /FORCE:MULTIPLE

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 38.8

Intel DQ87PG motherboard (Intel Celeron G1830)

SPECint\_base2006 = 37.2

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Feb-2014

Hardware Availability: Dec-2013

Software Availability: Apr-2013

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Fri Jul 25 00:48:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 July 2014.