



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R730 (Intel Xeon E5-2680 v3, 2.50 GHz)

SPECfp<sup>®</sup>\_rate2006 = 776

SPECfp\_rate\_base2006 = 756

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Aug-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

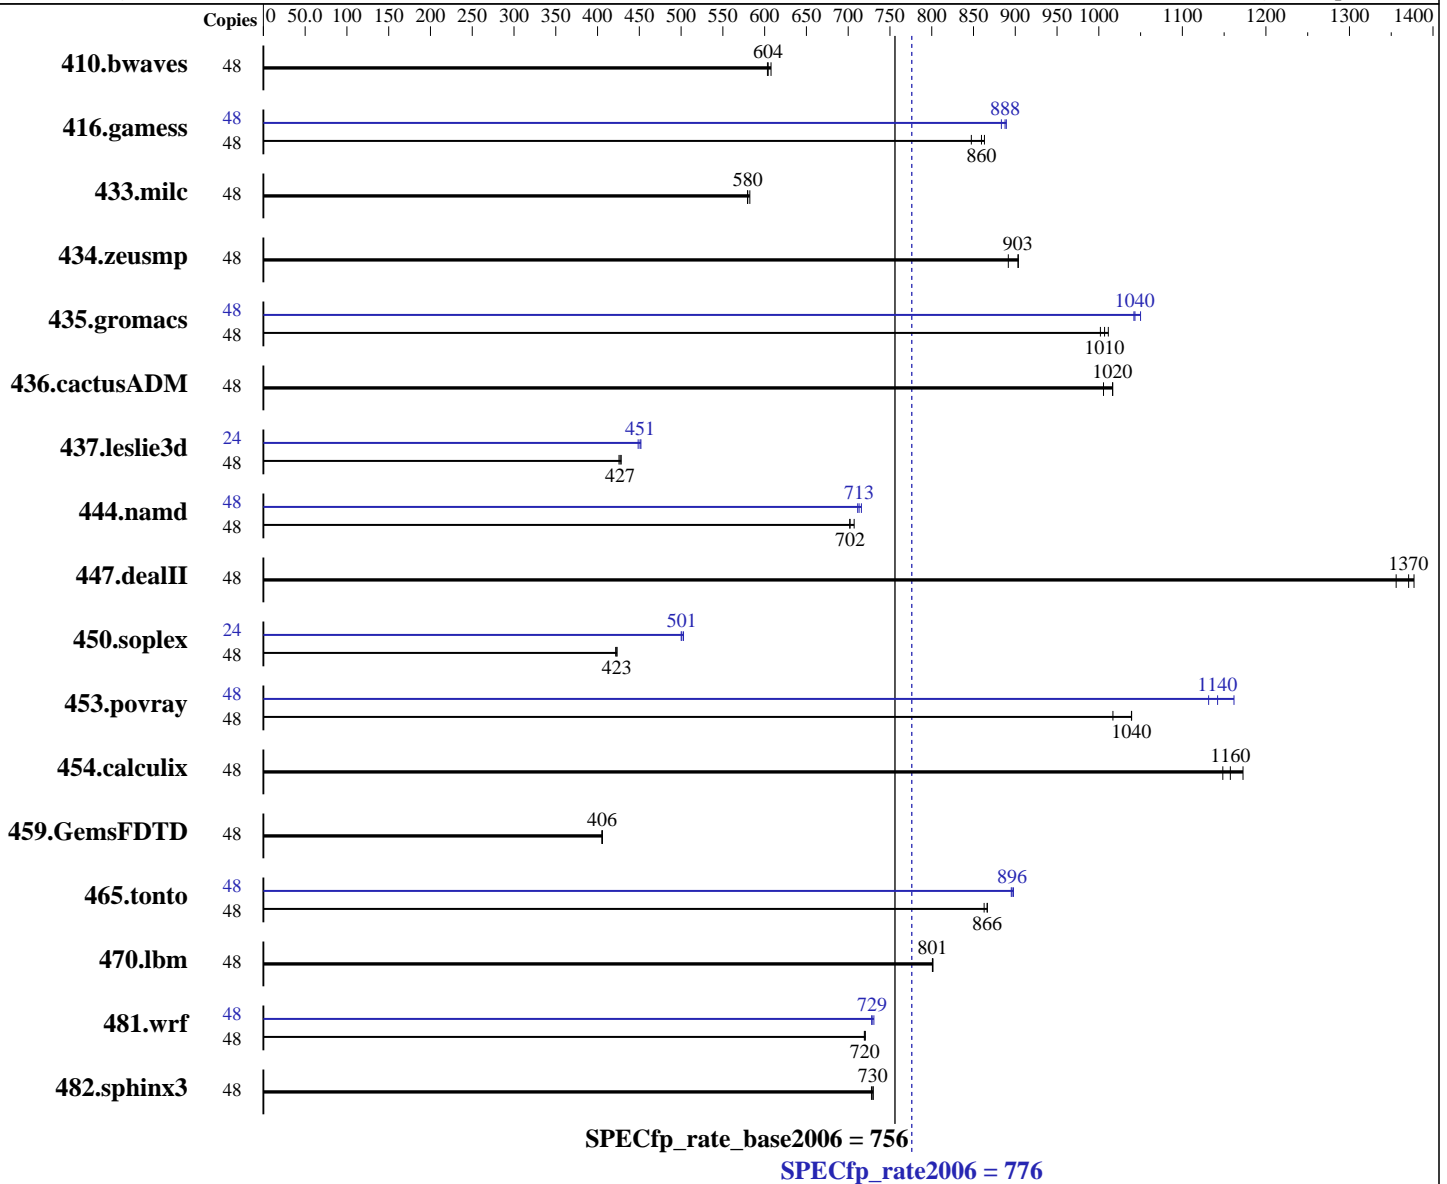

### Hardware

CPU Name: Intel Xeon E5-2680 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
 3.0.76-0.11-default  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R730 (Intel Xeon E5-2680 v3, 2.50 GHz)

SPECfp\_rate2006 = 776

SPECfp\_rate\_base2006 = 756

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Aug-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2133P-R)  
 64 GB (8 x 8 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 1000 GB 7200 RPM SATA  
 Other Hardware: None

Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

| Benchmark     | Base   |            |             |             |            |             |             | Peak   |            |             |             |             |             |             |
|---------------|--------|------------|-------------|-------------|------------|-------------|-------------|--------|------------|-------------|-------------|-------------|-------------|-------------|
|               | Copies | Seconds    | Ratio       | Seconds     | Ratio      | Seconds     | Ratio       | Copies | Seconds    | Ratio       | Seconds     | Ratio       | Seconds     | Ratio       |
| 410.bwaves    | 48     | 1074       | 608         | 1081        | 603        | <b>1080</b> | <b>604</b>  | 48     | 1074       | 608         | 1081        | 603         | <b>1080</b> | <b>604</b>  |
| 416.gamess    | 48     | 1109       | 847         | <b>1093</b> | <b>860</b> | 1089        | 863         | 48     | 1064       | 883         | <b>1059</b> | <b>888</b>  | 1057        | 889         |
| 433.milc      | 48     | 757        | 582         | 760         | 579        | <b>760</b>  | <b>580</b>  | 48     | 757        | 582         | 760         | 579         | <b>760</b>  | <b>580</b>  |
| 434.zeusmp    | 48     | 483        | 904         | <b>484</b>  | <b>903</b> | 490         | 892         | 48     | 483        | 904         | <b>484</b>  | <b>903</b>  | 490         | 892         |
| 435.gromacs   | 48     | 342        | 1000        | 339         | 1010       | <b>340</b>  | <b>1010</b> | 48     | 326        | 1050        | <b>329</b>  | <b>1040</b> | 329         | 1040        |
| 436.cactusADM | 48     | 570        | 1010        | 564         | 1020       | <b>564</b>  | <b>1020</b> | 48     | 570        | 1010        | 564         | 1020        | <b>564</b>  | <b>1020</b> |
| 437.leslie3d  | 48     | 1053       | 428         | 1060        | 426        | <b>1056</b> | <b>427</b>  | 24     | 499        | 452         | <b>500</b>  | <b>451</b>  | 503         | 449         |
| 444.namd      | 48     | 544        | 707         | <b>548</b>  | <b>702</b> | 548         | 702         | 48     | 538        | 716         | <b>540</b>  | <b>713</b>  | 541         | 711         |
| 447.dealII    | 48     | 399        | 1380        | 405         | 1360       | <b>401</b>  | <b>1370</b> | 48     | 399        | 1380        | 405         | 1360        | <b>401</b>  | <b>1370</b> |
| 450.soplex    | 48     | <b>946</b> | <b>423</b>  | 949         | 422        | 946         | 423         | 24     | <b>400</b> | <b>501</b>  | 400         | 500         | 398         | 503         |
| 453.povray    | 48     | <b>246</b> | <b>1040</b> | 251         | 1020       | 246         | 1040        | 48     | <b>224</b> | <b>1140</b> | 226         | 1130        | 220         | 1160        |
| 454.calculix  | 48     | 345        | 1150        | 338         | 1170       | <b>342</b>  | <b>1160</b> | 48     | 345        | 1150        | 338         | 1170        | <b>342</b>  | <b>1160</b> |
| 459.GemsFDTD  | 48     | 1257       | 405         | 1255        | 406        | <b>1256</b> | <b>406</b>  | 48     | 1257       | 405         | 1255        | 406         | <b>1256</b> | <b>406</b>  |
| 465.tonto     | 48     | 545        | 867         | <b>545</b>  | <b>866</b> | 547         | 863         | 48     | 526        | 898         | <b>527</b>  | <b>896</b>  | 528         | 895         |
| 470.lbm       | 48     | 823        | 802         | <b>823</b>  | <b>801</b> | 824         | 801         | 48     | 823        | 802         | <b>823</b>  | <b>801</b>  | 824         | 801         |
| 481.wrf       | 48     | <b>745</b> | <b>720</b>  | 745         | 719        | 744         | 720         | 48     | <b>736</b> | <b>729</b>  | 736         | 728         | 734         | 731         |
| 482.sphinx3   | 48     | 1282       | 730         | 1285        | 728        | <b>1282</b> | <b>730</b>  | 48     | 1282       | 730         | 1285        | 728         | <b>1282</b> | <b>730</b>  |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECfp\_rate2006 = 776**

PowerEdge R730 (Intel Xeon E5-2680 v3, 2.50 GHz)

**SPECfp\_rate\_base2006 = 756**

**CPU2006 license:** 55

**Test date:** Aug-2014

**Test sponsor:** Dell Inc.

**Hardware Availability:** Sep-2014

**Tested by:** Dell Inc.

**Software Availability:** Sep-2014

## Platform Notes

BIOS settings:

Snoop Mode set to Cluster on Die  
Virtualization Technology disabled  
Execute Disable disabled  
System Profile set to Performance  
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on linux-khqw Sat Aug 30 04:18:59 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2680 v3 @ 2.50GHz
 2 "physical id"s (chips)
 48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 12
  siblings  : 24
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
  physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 15360 KB
```

From /proc/meminfo

```
MemTotal:      198249228 kB
HugePages_Total:       0
Hugepagesize:       2048 kB
```

/usr/bin/lsb\_release -d

```
SUSE Linux Enterprise Server 11 (x86_64)
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3
```

uname -a:

```
Linux linux-khqw 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013
(ccab990) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Aug 29 16:55 last=S

SPEC is set to: /root/cpu2006-1.2

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext3  915G  10G  905G   2% /
```

Additional information from dmidecode:

```
BIOS Dell Inc. 1.0.4 08/28/2014
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECfp\_rate2006 = 776**

PowerEdge R730 (Intel Xeon E5-2680 v3,  
2.50 GHz)

**SPECfp\_rate\_base2006 = 756**

**CPU2006 license:** 55

**Test date:** Aug-2014

**Test sponsor:** Dell Inc.

**Hardware Availability:** Sep-2014

**Tested by:** Dell Inc.

**Software Availability:** Sep-2014

## Platform Notes (Continued)

### Memory:

```

1x 00AD00B300AD HMA42GR7MFR4N-TFTD 16 GB 2133 MHz
5x 00AD063200AD HMA42GR7MFR4N-TFT1 16 GB 2133 MHz
8x 00CE00B300CE M393A1G43DB0-CPB 8 GB 2133 MHz
2x 00CE00B300CE M393A2G40DB0-CPB 16 GB 2133 MHz
8x Not Specified Not Specified

```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

### C benchmarks:

```
icc -m64
```

### C++ benchmarks:

```
icpc -m64
```

### Fortran benchmarks:

```
ifort -m64
```

### Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R730 (Intel Xeon E5-2680 v3,  
2.50 GHz)

**SPECfp\_rate2006 = 776**

**SPECfp\_rate\_base2006 = 756**

**CPU2006 license:** 55  
**Test sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test date:** Aug-2014  
**Hardware Availability:** Sep-2014  
**Software Availability:** Sep-2014

## Base Portability Flags (Continued)

444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

**C benchmarks:**  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

**C++ benchmarks:**  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

**Fortran benchmarks:**  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

**Benchmarks using both Fortran and C:**  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

**C benchmarks:**  
icc -m64

**C++ benchmarks (except as noted below):**  
icpc -m64  
  
450.soplex: icpc -m32

**Fortran benchmarks:**  
ifort -m64

**Benchmarks using both Fortran and C:**  
icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R730 (Intel Xeon E5-2680 v3,  
2.50 GHz)

**SPECfp\_rate2006 = 776**

**SPECfp\_rate\_base2006 = 756**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Aug-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Sep-2014

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
         -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2)
           -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
           -opt-malloc-options=3

```

```

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2)
           -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14
           -ansi-alias

```

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECfp\_rate2006 = 776**

PowerEdge R730 (Intel Xeon E5-2680 v3,  
2.50 GHz)

**SPECfp\_rate\_base2006 = 756**

**CPU2006 license:** 55

**Test date:** Aug-2014

**Test sponsor:** Dell Inc.

**Hardware Availability:** Sep-2014

**Tested by:** Dell Inc.

**Software Availability:** Sep-2014

## Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Sep 24 16:19:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 24 September 2014.