



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T630 (Intel Xeon E5-2623 v3, 3.00 GHz)

SPECfp[®]_rate2006 = 388

SPECfp_rate_base2006 = 378

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jul-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

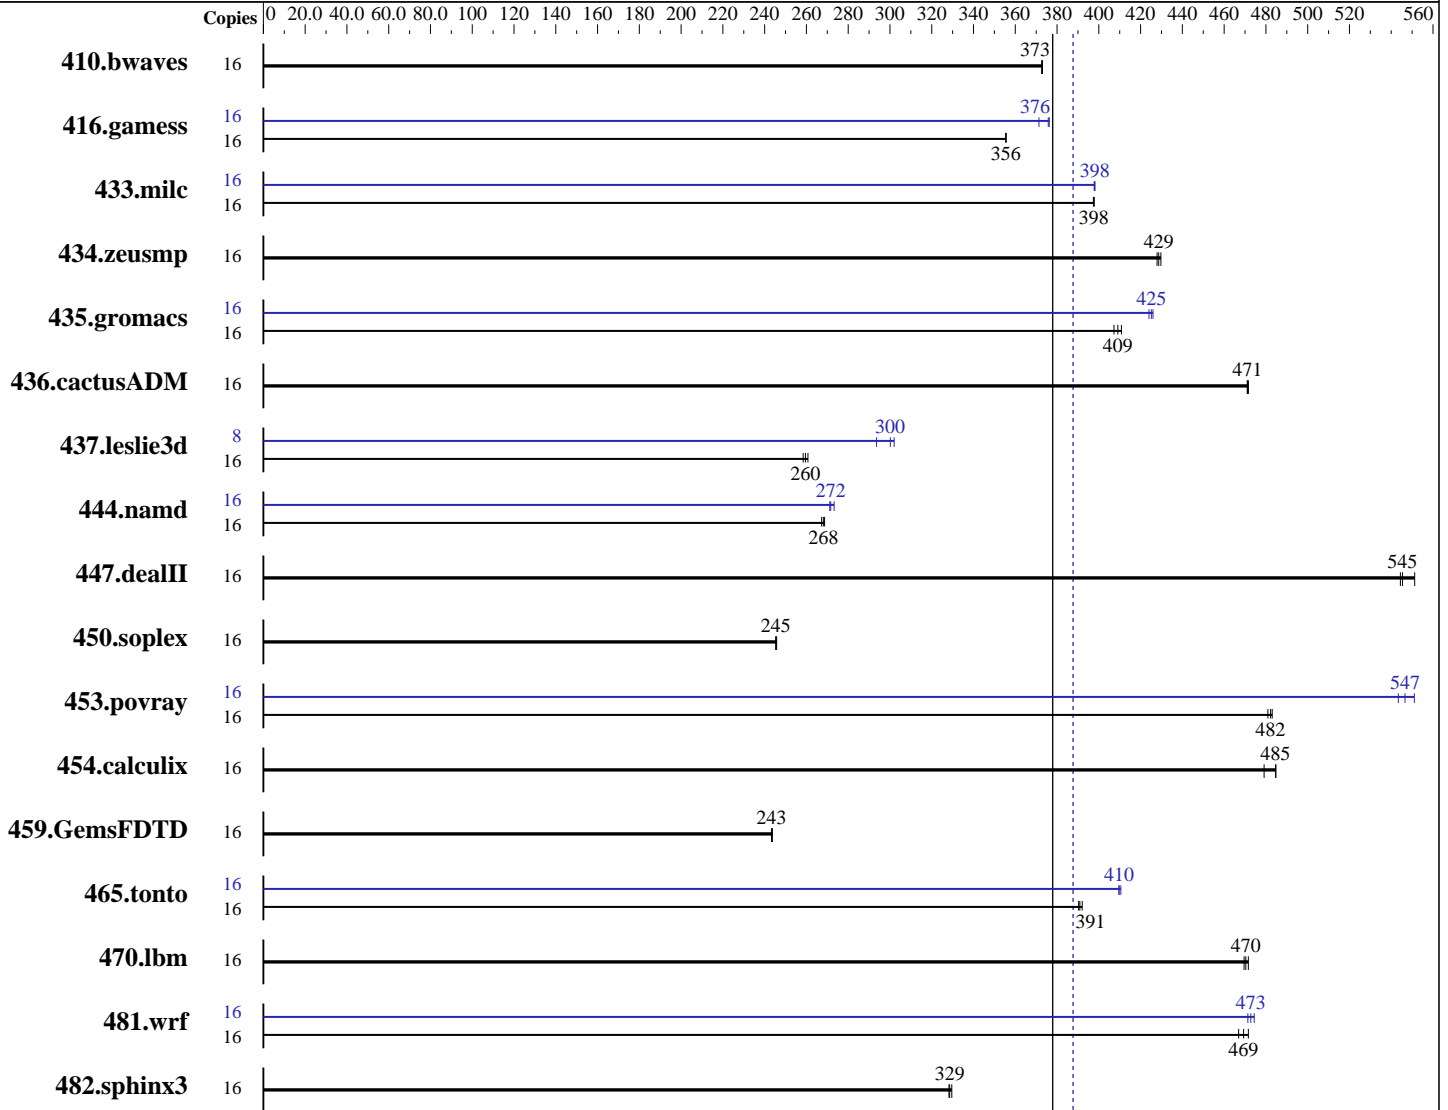

SPECfp_rate_base2006 = 378

SPECfp_rate2006 = 388

Hardware

CPU Name: Intel Xeon E5-2623 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
 3.0.76-0.11-default
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext2
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T630 (Intel Xeon E5-2623 v3, 3.00 GHz)

SPECfp_rate2006 = 388

SPECfp_rate_base2006 = 378

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jul-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

L3 Cache: 10 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)
Disk Subsystem: 1 x 300 GB 15000 RPM SAS
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	16	583	373	584	373	583	373	16	583	373	584	373	583	373		
416.gamess	16	881	355	881	356	881	356	16	833	376	834	376	844	371		
433.milc	16	370	397	369	398	369	398	16	369	398	369	398	369	398		
434.zeusmp	16	340	428	340	429	339	430	16	340	428	340	429	339	430		
435.gromacs	16	278	411	279	409	281	407	16	269	424	269	425	268	426		
436.cactusADM	16	406	471	405	472	406	471	16	406	471	405	472	406	471		
437.leslie3d	16	582	258	577	261	580	260	8	249	302	251	300	256	294		
444.namd	16	478	269	479	268	480	267	16	470	273	472	272	473	271		
447.dealII	16	332	551	336	544	336	545	16	332	551	336	544	336	545		
450.soplex	16	544	245	544	245	543	246	16	544	245	544	245	543	246		
453.povray	16	176	483	177	481	177	482	16	157	543	154	551	156	547		
454.calculix	16	272	485	275	479	272	485	16	272	485	275	479	272	485		
459.GemsFDTD	16	698	243	697	244	698	243	16	698	243	697	244	698	243		
465.tonto	16	403	390	402	392	403	391	16	383	411	384	410	384	410		
470.lbm	16	466	472	468	470	467	470	16	466	472	468	470	467	470		
481.wrf	16	379	472	381	469	383	467	16	377	474	378	473	379	471		
482.sphinx3	16	949	329	946	330	950	328	16	949	329	946	330	950	328		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
Snoop Mode set to Early Snoop
Virtualization Technology disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T630 (Intel Xeon E5-2623 v3, 3.00 GHz)

SPECfp_rate2006 = 388

SPECfp_rate_base2006 = 378

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jul-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Platform Notes (Continued)

```
Execute Disable disabled
System Profile set to Performance
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on linux Thu Jul 3 18:25:13 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2623 v3 @ 3.00GHz
 2 "physical id"s (chips)
 16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 8
  physical 0: cores 0 1 2 3
  physical 1: cores 0 1 2 3
cache size : 10240 KB
```

```
From /proc/meminfo
MemTotal:      264572124 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3
```

```
uname -a:
Linux linux 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013 (ccab990)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 3 08:56 last=S
```

```
SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext2  222G  9.8G  211G   5% /
```

```
Additional information from dmidecode:
BIOS Dell Inc. 0.3.25 06/26/2014
Memory:
16x 00AD00B300AD HMA42GR7MFR4N-TFTD 16 GB 1866 MHz
8x Not Specified Not Specified
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 388

PowerEdge T630 (Intel Xeon E5-2623 v3,
3.00 GHz)

SPECfp_rate_base2006 = 378

CPU2006 license: 55

Test date: Jul-2014

Test sponsor: Dell Inc.

Hardware Availability: Sep-2014

Tested by: Dell Inc.

Software Availability: Sep-2014

Platform Notes (Continued)

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T630 (Intel Xeon E5-2623 v3,
3.00 GHz)

SPECfp_rate2006 = 388

SPECfp_rate_base2006 = 378

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jul-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Base Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 388

PowerEdge T630 (Intel Xeon E5-2623 v3,
3.00 GHz)

SPECfp_rate_base2006 = 378

CPU2006 license: 55

Test date: Jul-2014

Test sponsor: Dell Inc.

Hardware Availability: Sep-2014

Tested by: Dell Inc.

Software Availability: Sep-2014

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T630 (Intel Xeon E5-2623 v3,
3.00 GHz)

SPECfp_rate2006 = 388

SPECfp_rate_base2006 = 378

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jul-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Sep 24 16:20:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 September 2014.