



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp®_rate2006 = 594

Sugon I620-G20 (Intel Xeon E5-2640 v3)

SPECfp_rate_base2006 = 578

CPU2006 license: 9046


Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

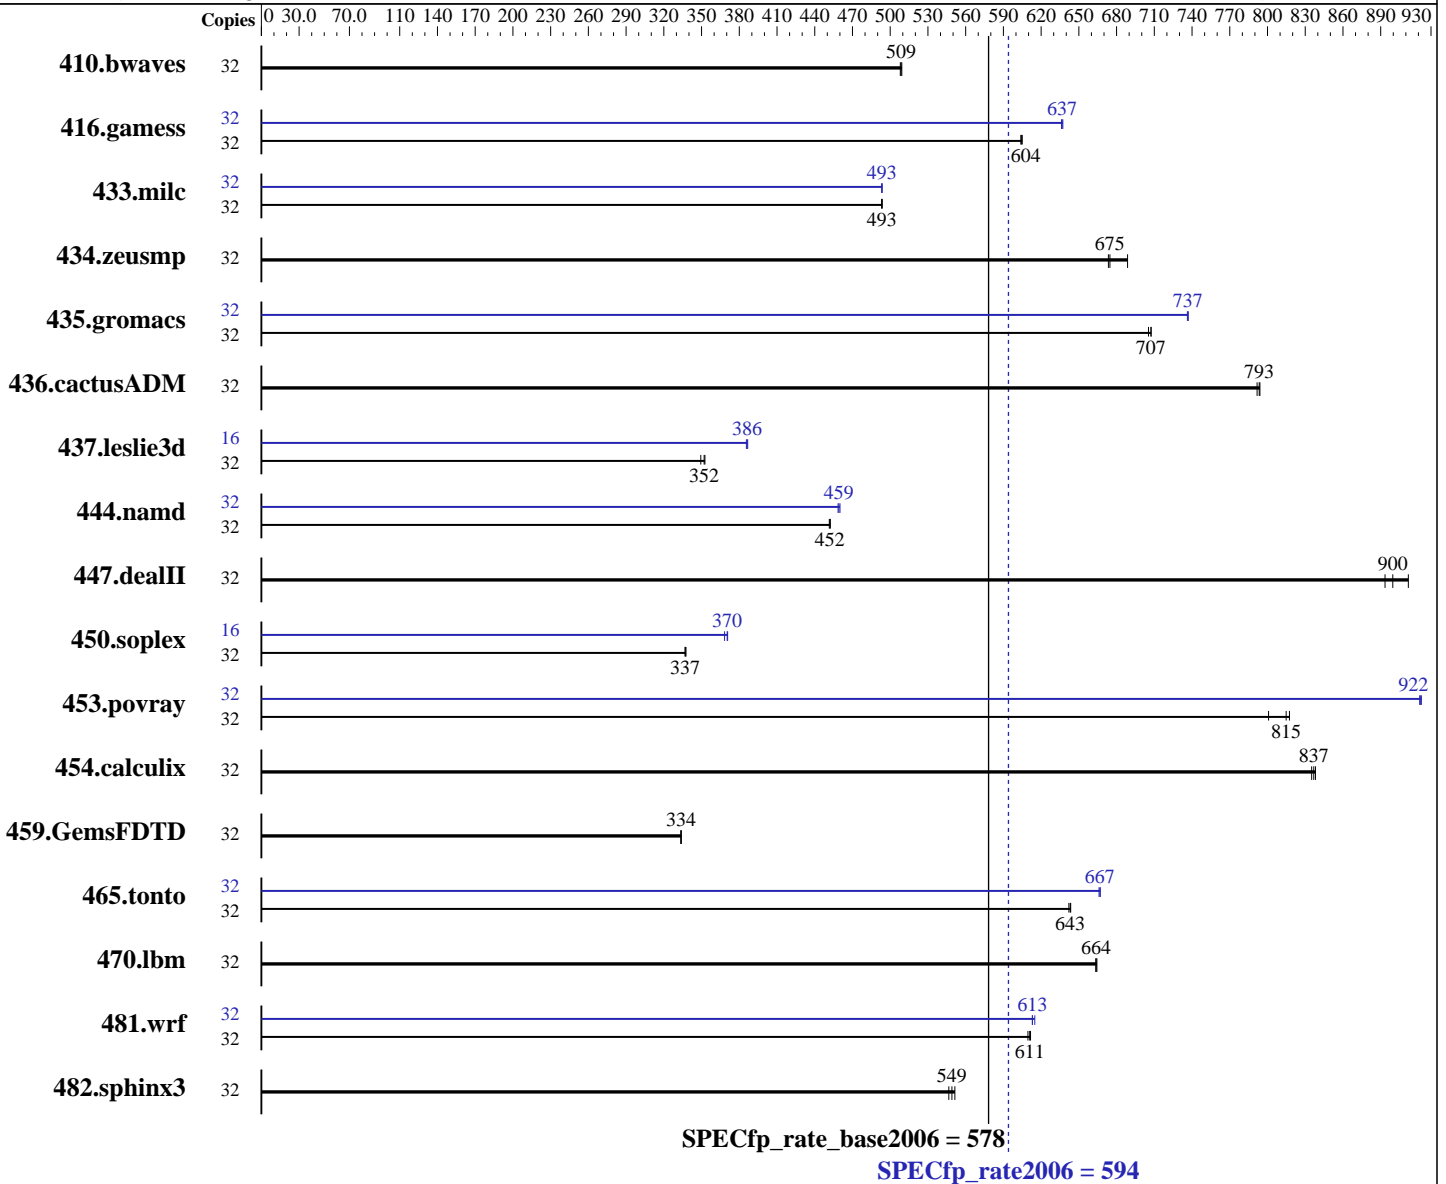

Hardware

CPU Name: Intel Xeon E5-2640 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp_rate2006 = **594**

Sugon I620-G20 (Intel Xeon E5-2640 v3)

SPECfp_rate_base2006 = **578**

CPU2006 license: 9046

Test date: Nov-2014

Test sponsor: Sugon

Hardware Availability: Sep-2014

Tested by: Sugon

Software Availability: Nov-2013

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 2.0 TB SATA 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---------------|--------|-------------|------------|-------------|------------|-------------|------------|--------|------------|------------|-------------|------------|-------------|------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 410.bwaves | 32 | 855 | 509 | 854 | 509 | 856 | 508 | 32 | 855 | 509 | 854 | 509 | 856 | 508 |
| 416.gamess | 32 | 1037 | 604 | 1036 | 605 | 1038 | 604 | 32 | 985 | 636 | 984 | 637 | 983 | 637 |
| 433.milc | 32 | 596 | 493 | 595 | 494 | 595 | 493 | 32 | 595 | 494 | 595 | 493 | 595 | 493 |
| 434.zeusmp | 32 | 432 | 673 | 432 | 675 | 423 | 689 | 32 | 432 | 673 | 432 | 675 | 423 | 689 |
| 435.gromacs | 32 | 324 | 705 | 323 | 707 | 323 | 707 | 32 | 310 | 736 | 310 | 737 | 310 | 737 |
| 436.cactusADM | 32 | 482 | 794 | 483 | 792 | 482 | 793 | 32 | 482 | 794 | 483 | 792 | 482 | 793 |
| 437.leslie3d | 32 | 853 | 353 | 854 | 352 | 861 | 349 | 16 | 389 | 386 | 390 | 386 | 389 | 387 |
| 444.namd | 32 | 567 | 452 | 568 | 452 | 568 | 452 | 32 | 558 | 460 | 559 | 459 | 560 | 459 |
| 447.dealII | 32 | 407 | 900 | 401 | 912 | 410 | 893 | 32 | 407 | 900 | 401 | 912 | 410 | 893 |
| 450.soplex | 32 | 790 | 338 | 792 | 337 | 792 | 337 | 16 | 360 | 370 | 362 | 368 | 360 | 371 |
| 453.povray | 32 | 213 | 801 | 208 | 817 | 209 | 815 | 32 | 185 | 922 | 185 | 922 | 185 | 921 |
| 454.calculix | 32 | 315 | 838 | 315 | 837 | 316 | 835 | 32 | 315 | 838 | 315 | 837 | 316 | 835 |
| 459.GemsFDTD | 32 | 1018 | 334 | 1017 | 334 | 1017 | 334 | 32 | 1018 | 334 | 1017 | 334 | 1017 | 334 |
| 465.tonto | 32 | 490 | 642 | 490 | 643 | 489 | 644 | 32 | 472 | 667 | 473 | 666 | 472 | 667 |
| 470.lbm | 32 | 663 | 663 | 662 | 664 | 662 | 664 | 32 | 663 | 663 | 662 | 664 | 662 | 664 |
| 481.wrf | 32 | 584 | 612 | 585 | 611 | 586 | 610 | 32 | 583 | 613 | 581 | 615 | 583 | 613 |
| 482.sphinx3 | 32 | 1141 | 547 | 1131 | 551 | 1136 | 549 | 32 | 1141 | 547 | 1131 | 551 | 1136 | 549 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Enforce POR set to Enable
Memory Frequency set to Auto
Early Snoop set to disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp_rate2006 = 594

Sugon I620-G20 (Intel Xeon E5-2640 v3)

SPECfp_rate_base2006 = 578

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

Platform Notes (Continued)

COD set to enable

Power Technology set to performance

Sysinfo program /home/cpu2006/config/sysinfo.rev6874

\$Rev: 6874 \$ \$Date:: 2013-11-20 #\$ 654bd3fcf53b06faef0efe54ed011998

running on localhost Mon Nov 10 19:32:40 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2640 v3 @ 2.60GHz

2 "physical id"s (chips)

32 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 8

siblings : 16

physical 0: cores 0 1 2 3 4 5 6 7

physical 1: cores 0 1 2 3 4 5 6 7

cache size : 20480 KB

From /proc/meminfo

MemTotal: 264479460 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsc_release -d

Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*

redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)

system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)

system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:

Linux localhost 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013

x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Nov 10 14:07

SPEC is set to: /home/cpu2006

Filesystem Type Size Used Avail Use% Mounted on

/dev/sda3 ext4 1.8T 13G 1.7T 1% /

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp_rate2006 = 594

Sugon I620-G20 (Intel Xeon E5-2640 v3)

SPECfp_rate_base2006 = 578

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

Platform Notes (Continued)

BIOS American Megatrends Inc. 068 08/15/2014

Memory:

16x Hynix Semiconductor HMA42GR7MFR4N-TFTD 16 GB 2 rank 2133 MHz, configured at 1866 MHz

8x NO DIMM NO DIMM

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Submitted_by: Tian Yuwan <tianyw@sugon.com>

Submitted: Wed Nov 12 00:56:20 EST 2014

Submission: cpu2006-20141112-32777.sub

Submitted_by: Tian Yuwan <tianyw@sugon.com>

Submitted: Sun Nov 23 21:50:03 EST 2014

Submission: cpu2006-20141112-32777.sub

Submitted_by: Tian Yuwan <tianyw@sugon.com>

Submitted: Wed Nov 26 05:11:52 EST 2014

Submission: cpu2006-20141112-32777.sub

Submitted_by: Tian Yuwan <tianyw@sugon.com>

Submitted: Thu Nov 27 00:57:34 EST 2014

Submission: cpu2006-20141112-32777.sub

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp_rate2006 = 594

Sugon I620-G20 (Intel Xeon E5-2640 v3)

SPECfp_rate_base2006 = 578

CPU2006 license: 9046

Test date: Nov-2014

Test sponsor: Sugon

Hardware Availability: Sep-2014

Tested by: Sugon

Software Availability: Nov-2013

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp_rate2006 = 594

Sugon I620-G20 (Intel Xeon E5-2640 v3)

SPECfp_rate_base2006 = 578

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.deall: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2)
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
 -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp_rate2006 = 594

Sugon I620-G20 (Intel Xeon E5-2640 v3)

SPECfp_rate_base2006 = 578

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp_rate2006 = 594

Sugon I620-G20 (Intel Xeon E5-2640 v3)

SPECfp_rate_base2006 = 578

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-HSW-revA.20141203.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-HSW-revA.20141203.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Dec 3 10:29:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 December 2014.