



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## IBM Corporation

### SPECfp<sup>®</sup>\_rate2006 = 4420

### IBM Power E880 (4.35 GHz, 64 core, RHEL)

### SPECfp\_rate\_base2006 = 3940

CPU2006 license: 11


Test date: Nov-2014

Test sponsor: IBM Corporation

Hardware Availability: Nov-2014

Tested by: IBM Corporation

Software Availability: Jun-2014

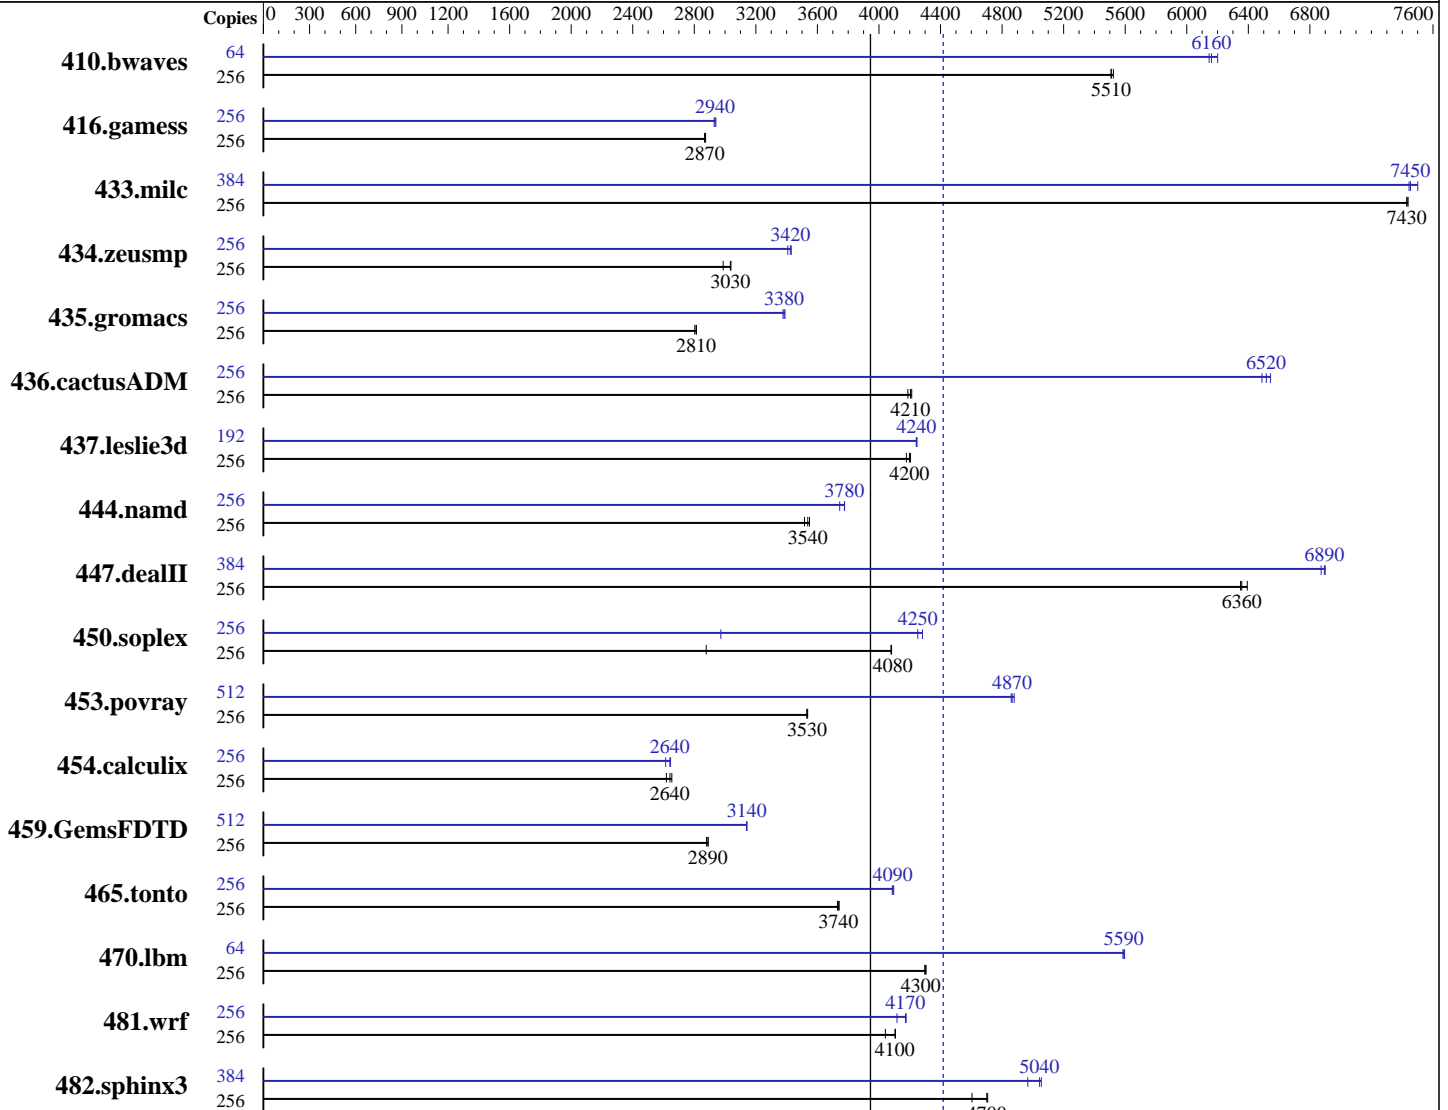

SPECfp\_rate\_base2006 = 3940

SPECfp\_rate2006 = 4420

#### Hardware

CPU Name: POWER8  
 CPU Characteristics: Intelligent Energy Optimization enabled, up to 4.53 GHz  
 CPU MHz: 4359  
 FPU: Integrated  
 CPU(s) enabled: 64 cores, 8 chips, 8 cores/chip, 8 threads/core  
 CPU(s) orderable: 4,8 Modules  
 Primary Cache: 32 KB I + 64 KB D on chip per core

Continued on next page

#### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (ppc64) kernel 3.10.0-123.el7.ppc64  
 Compiler: C/C++: Version 13.1 of IBM XL C/C++ for Linux; Fortran: Version 15.1 of IBM XL Fortran for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## IBM Corporation

SPECfp\_rate2006 = 4420

IBM Power E880 (4.35 GHz, 64 core, RHEL)

SPECfp\_rate\_base2006 = 3940

CPU2006 license: 11

Test date: Nov-2014

Test sponsor: IBM Corporation

Hardware Availability: Nov-2014

Tested by: IBM Corporation

Software Availability: Jun-2014

Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per core  
 Other Cache: 16 MB I+D off chip per CDIMM  
 Memory: 2 TB (64 x 32 GB CDIMMs) DDR3 1600 MHz  
 Disk Subsystem: 7 x 300 GB 15K RPM SAS SF2-2 Raid5  
 Other Hardware: None

Other Software: Post-Link Optimization for Linux on POWER, version 5.7.0  
 IBM Advance Toolchain 7.0-3

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	256	<b>632</b>	<b>5510</b>	630	5520	632	5510	64	142	6150	140	6200	<b>141</b>	<b>6160</b>
416.gamess	256	1748	2870	<b>1747</b>	<b>2870</b>	1744	2870	256	1711	2930	1705	2940	<b>1708</b>	<b>2940</b>
433.milc	256	<b>316</b>	<b>7430</b>	316	7430	316	7440	384	<b>473</b>	<b>7450</b>	470	7500	474	7440
434.zeusmp	256	767	3040	<b>768</b>	<b>3030</b>	780	2990	256	<b>680</b>	<b>3420</b>	679	3430	684	3410
435.gromacs	256	<b>650</b>	<b>2810</b>	652	2800	650	2810	256	539	3390	541	3380	<b>540</b>	<b>3380</b>
436.cactusADM	256	730	4190	<b>728</b>	<b>4210</b>	726	4210	256	467	6540	<b>469</b>	<b>6520</b>	471	6490
437.leslie3d	256	<b>573</b>	<b>4200</b>	576	4180	572	4210	192	425	4250	425	4240	<b>425</b>	<b>4240</b>
444.namd	256	584	3520	<b>580</b>	<b>3540</b>	579	3550	256	548	3740	<b>544</b>	<b>3780</b>	544	3780
447.dealII	256	<b>461</b>	<b>6360</b>	458	6390	461	6350	384	<b>637</b>	<b>6890</b>	637	6900	639	6870
450.soplex	256	742	2880	<b>524</b>	<b>4080</b>	523	4080	256	718	2970	<b>502</b>	<b>4250</b>	499	4280
453.povray	256	385	3540	<b>385</b>	<b>3530</b>	386	3530	512	558	4880	561	4860	<b>560</b>	<b>4870</b>
454.calculix	256	<b>799</b>	<b>2640</b>	796	2650	807	2620	256	798	2650	808	2610	<b>800</b>	<b>2640</b>
459.GemsFDTD	256	<b>940</b>	<b>2890</b>	943	2880	940	2890	512	<b>1730</b>	<b>3140</b>	1730	3140	1729	3140
465.tonto	256	<b>674</b>	<b>3740</b>	673	3740	675	3730	256	616	4090	<b>616</b>	<b>4090</b>	615	4100
470.lbm	256	818	4300	<b>818</b>	<b>4300</b>	817	4310	64	157	5590	<b>157</b>	<b>5590</b>	157	5600
481.wrf	256	708	4040	<b>697</b>	<b>4100</b>	696	4110	256	695	4120	685	4180	<b>685</b>	<b>4170</b>
482.sphinx3	256	1084	4600	<b>1061</b>	<b>4700</b>	1060	4710	384	1507	4970	1481	5060	<b>1484</b>	<b>5040</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Peak Tuning Notes

```

410.bwaves fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
416.gamess fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
433.milc fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
434.zeusmp fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
435.gromacs fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
436.cactusADM fdpr options: -O4 -m power8 -A 2 -sls -dir -vrox
437.leslie3d fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
444.namd fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
447.dealII fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
453.povray fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
454.calculix fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
459.GemsFDTD fdpr options: -O4 -m power8 -A 2 -sls -dir -vrox
465.tonto fdpr options: -O4 -m power8 -A 2 -sls -dir -vrox

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 4420

IBM Power E880 (4.35 GHz, 64 core, RHEL)

SPECfp\_rate\_base2006 = 3940

CPU2006 license: 11

Test date: Nov-2014

Test sponsor: IBM Corporation

Hardware Availability: Nov-2014

Tested by: IBM Corporation

Software Availability: Jun-2014

## Peak Tuning Notes (Continued)

470.lbm fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox  
481.wrf fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox  
482.sphinx3 fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox

## Submit Notes

The config file option 'submit' was used to assign benchmark copy to specific kernel thread using the "numactl" command (see flags file for details).

## Operating System Notes

ulimit -s (stack) set to unlimited  
  
51200 16M large pages defined with sysctl command  
Transparent huge page disabled with  
echo never > /sys/kernel/mm/transparent\_hugepage/enabled  
sysctl vm.nr\_hugepages=N and reboot to set large page pool

## General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_MORECORE = "yes"  
HUGETLB\_VERBOSE = "0"  
XLFRTLOPTS = "intrinths=1"  
This result uses the post\_setup and/or bench\_post\_setup to drop caches. SPEC has determined that although the effect may have been negligible for this run, future submissions will not be considered rule compliant if the post\_setup actions drop caches (e.g. : "echo 3 > /proc/sys/vm/drop\_caches").

## Base Compiler Invocation

C benchmarks:  
/opt/ibm/xlC/13.1.0/bin/xlc\_at -qlanglvl=extc99  
  
C++ benchmarks:  
/opt/ibm/xlC/13.1.0/bin/xlc\_at  
  
Fortran benchmarks:  
/opt/ibm/xlf/15.1.0/bin/xlf95\_at  
  
Benchmarks using both Fortran and C:  
/opt/ibm/xlC/13.1.0/bin/xlc\_at -qlanglvl=extc99  
/opt/ibm/xlf/15.1.0/bin/xlf95\_at



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 4420

IBM Power E880 (4.35 GHz, 64 core, RHEL)

SPECfp\_rate\_base2006 = 3940

CPU2006 license: 11

Test date: Nov-2014

Test sponsor: IBM Corporation

Hardware Availability: Nov-2014

Tested by: IBM Corporation

Software Availability: Jun-2014

## Base Portability Flags

410.bwaves: -qfixed  
416.gamess: -qfixed  
434.zeusmp: -qfixed  
435.gromacs: -qfixed -qextname  
436.cactusADM: -qfixed -qextname  
437.leslie3d: -qfixed  
454.calculix: -qfixed -qextname  
481.wrf: -DNOUNDERSCORE  
482.sphinx3: -qchars=signed

## Base Optimization Flags

C benchmarks:  
-qinline=40 -qipa=threads -qlargepage -O5 -qsimd=noauto -lhugetlbfs

C++ benchmarks:  
-qinline=40 -qipa=threads -qlargepage -O5 -qrtti -lhugetlbfs

Fortran benchmarks:  
-qipa=threads -qlargepage -O5 -qalias=nostd -lhugetlbfs

Benchmarks using both Fortran and C:  
-qinline=40 -qipa=threads -qlargepage -O5 -qsimd=noauto  
-qalias=nostd -lhugetlbfs

## Base Other Flags

C benchmarks:  
-qipa=noobject -qsuppress=1500-036

C++ benchmarks:  
-qipa=noobject -qsuppress=1500-036

Fortran benchmarks:  
-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg  
-qsuppress=1500-036

Benchmarks using both Fortran and C:  
-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg  
-qsuppress=1500-036



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 4420

IBM Power E880 (4.35 GHz, 64 core, RHEL)

SPECfp\_rate\_base2006 = 3940

CPU2006 license: 11

Test date: Nov-2014

Test sponsor: IBM Corporation

Hardware Availability: Nov-2014

Tested by: IBM Corporation

Software Availability: Jun-2014

## Peak Compiler Invocation

C benchmarks:

/opt/ibm/xlC/13.1.0/bin/xlC\_at -qlanglvl=extc99

C++ benchmarks:

/opt/ibm/xlC/13.1.0/bin/xlC\_at

Fortran benchmarks:

/opt/ibm/xlf/15.1.0/bin/xlf95\_at

Benchmarks using both Fortran and C:

/opt/ibm/xlC/13.1.0/bin/xlC\_at -qlanglvl=extc99

/opt/ibm/xlf/15.1.0/bin/xlf95\_at

## Peak Portability Flags

410.bwaves: -qfixed  
416.gamess: -qfixed  
434.zeusmp: -qfixed  
435.gromacs: -qfixed -qextname  
436.cactusADM: -DSPEC\_CPU\_LP64 -qfixed -qextname  
437.leslie3d: -qfixed  
454.calculix: -qfixed -qextname  
481.wrf: -DNOUNDERSCORE  
482.sphinx3: -qchars=signed

## Peak Optimization Flags

C benchmarks:

433.milc: -qinline=40 -qipa=threads -qlargepage -O5 -qsimd=noauto  
-qfdpr -lhugetlbfs -Wl,-q

470.lbm: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)  
-qlargepage -O5 -qsimd=noauto -q64 -qfdpr -lhugetlbfs  
-Wl,-q

482.sphinx3: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)  
-qlargepage -O5 -qsimd=noauto -qfdpr -lhugetlbfs -Wl,-q

C++ benchmarks:

444.namd: -qinline=40 -qipa=threads -qlargepage -O4 -qfdpr  
-lhugetlbfs -Wl,-q

447.dealIII: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)  
-qlargepage -O4 -qfdpr -qrtti -lhugetlbfs -Wl,-q

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 4420

IBM Power E880 (4.35 GHz, 64 core, RHEL)

SPECfp\_rate\_base2006 = 3940

CPU2006 license: 11

Test date: Nov-2014

Test sponsor: IBM Corporation

Hardware Availability: Nov-2014

Tested by: IBM Corporation

Software Availability: Jun-2014

## Peak Optimization Flags (Continued)

450.soplex: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)  
-qlargepage -O3 -qarch=auto -qtune=auto -qsimd  
-qnoprefetch -lhugetlbfs

453.povray: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)  
-qlargepage -O3 -qarch=auto -qtune=auto  
-qprefetch=dscr=0x93 -qfdpr -lhugetlbfs -Wl,-q

### Fortran benchmarks:

410.bwaves: -qipa=threads -qlargepage -O5 -qsimd=noauto -qfdpr  
-qsmallstack=dynlenonheap -lhugetlbfs -Wl,-q

416.gamess: -qipa=threads -qlargepage -O5 -qsimd=noauto  
-qprefetch=dscr=0x54 -qipa=partition=large -qfdpr  
-qalias=nostd -lhugetlbfs -Wl,-q

434.zeusmp: -qipa=threads -qlargepage -O4 -qsimd=noauto -q64 -qfdpr  
-qxlf90=nosignedzero -lhugetlbfs -Wl,-q

437.leslie3d: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -qlargepage  
-O5 -q64 -qfdpr -lhugetlbfs -Wl,-q  
-B/opt/at7.0/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-align

459.GemsFDTD: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -qlargepage  
-O5 -q64 -qipa=partition=large -qfdpr -lhugetlbfs -Wl,-q

465.tonto: Same as 459.GemsFDTD

### Benchmarks using both Fortran and C:

435.gromacs: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)  
-qlargepage -O4 -qipa=partition=large -qfdpr -lhugetlbfs  
-Wl,-q

436.cactusADM: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)  
-qlargepage -O4 -qarch=pwr7 -qtune=pwr7  
-qipa=partition=large -q64 -qfdpr -lhugetlbfs -Wl,-q

454.calculix: -qinline=40 -qipa=threads -O5 -qsimd=noauto -qfdpr  
-lhugetlbfs -Wl,-q

481.wrf: -qinline=40 -qipa=threads -qlargepage -O5  
-qipa=partition=large -qfdpr -lhugetlbfs -Wl,-q



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 4420

IBM Power E880 (4.35 GHz, 64 core, RHEL)

SPECfp\_rate\_base2006 = 3940

CPU2006 license: 11

Test date: Nov-2014

Test sponsor: IBM Corporation

Hardware Availability: Nov-2014

Tested by: IBM Corporation

Software Availability: Jun-2014

## Peak Other Flags

C benchmarks (except as noted below):

-qsuppress=1586-476(pass 2) -qipa=noobject -qsuppress=1500-036

433.milc: -qipa=noobject -qsuppress=1500-036

C++ benchmarks (except as noted below):

-qsuppress=1586-476(pass 2) -qipa=noobject -qsuppress=1500-036

444.namd: -qipa=noobject -qsuppress=1500-036

Fortran benchmarks (except as noted below):

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg  
-qsuppress=1500-036

437.leslie3d: -qsuppress=1586-476(pass 2) -qipa=noobject  
-qsuppress=1500-010 -qsuppress=cmpmsg -qsuppress=1500-036

459.GemsFDTD: -qsuppress=1586-476(pass 2) -qipa=noobject  
-qsuppress=1500-010 -qsuppress=cmpmsg -qsuppress=1500-036

465.tonto: -qsuppress=1586-476(pass 2) -qipa=noobject  
-qsuppress=1500-010 -qsuppress=cmpmsg -qsuppress=1500-036

Benchmarks using both Fortran and C (except as noted below):

-qsuppress=1586-476(pass 2) -qipa=noobject -qsuppress=1500-010  
-qsuppress=cmpmsg -qsuppress=1500-036

454.calculix: -qsuppress=1500-010 -qsuppress=cmpmsg -qsuppress=1500-036

481.wrf: -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg  
-qsuppress=1500-036

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-XL.V13La.html>

<http://www.spec.org/cpu2006/flags/IBM-Linux-V7.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-XL.V13La.xml>

<http://www.spec.org/cpu2006/flags/IBM-Linux-V7.xml>



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 4420

IBM Power E880 (4.35 GHz, 64 core, RHEL)

SPECfp\_rate\_base2006 = 3940

CPU2006 license: 11

Test date: Nov-2014

Test sponsor: IBM Corporation

Hardware Availability: Nov-2014

Tested by: IBM Corporation

Software Availability: Jun-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Dec 20 18:15:48 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 December 2014.