



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

**SPECfp®\_rate2006 = 198**

Huawei RH2288 V2 (Intel Xeon E5-2603 v2)

**SPECfp\_rate\_base2006 = 195**

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

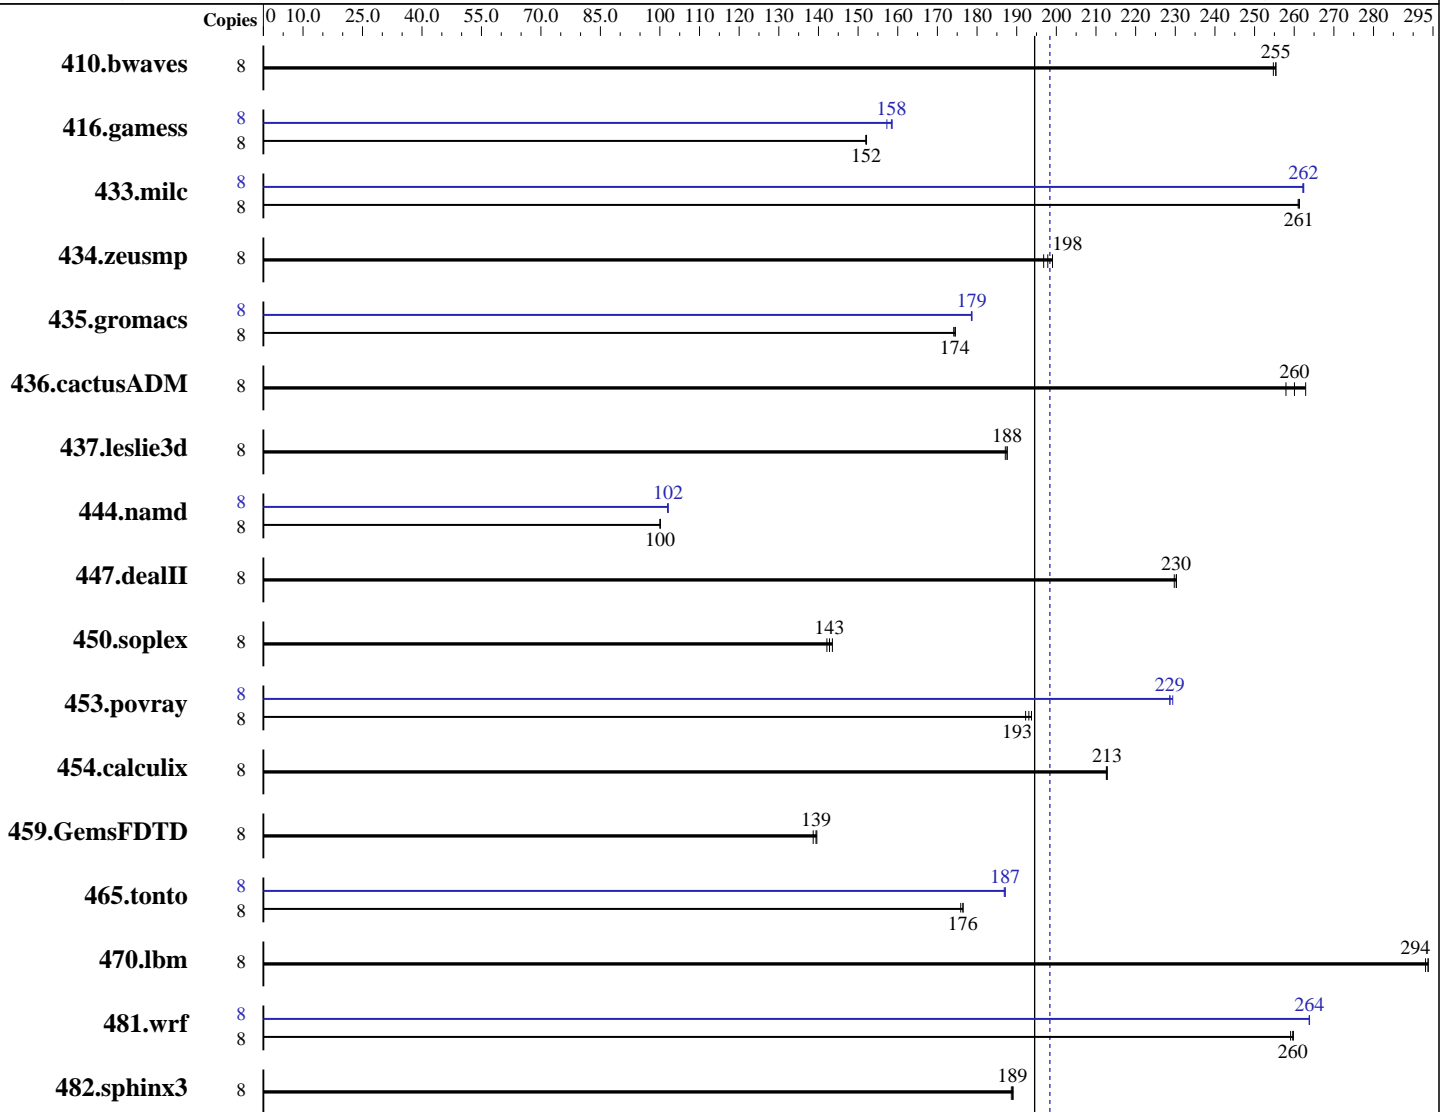

SPECfp\_rate\_base2006 = 195

**SPECfp\_rate2006 = 198**

### Hardware

CPU Name: Intel Xeon E5-2603 v2  
 CPU Characteristics:  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECfp\_rate2006 = **198**

Huawei RH2288 V2 (Intel Xeon E5-2603 v2)

SPECfp\_rate\_base2006 = **195**

CPU2006 license: 3175

Test date: Oct-2014

Test sponsor: Huawei

Hardware Availability: Sep-2013

Tested by: Huawei

Software Availability: Nov-2013

L3 Cache: 10 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	8	426	255	427	255	<b>426</b>	<b>255</b>	8	426	255	427	255	<b>426</b>	<b>255</b>		
416.gamess	8	1031	152	1030	152	<b>1030</b>	<b>152</b>	8	<b>989</b>	<b>158</b>	996	157	988	159		
433.milc	8	281	261	281	261	<b>281</b>	<b>261</b>	8	280	262	280	262	<b>280</b>	<b>262</b>		
434.zeusmp	8	<b>368</b>	<b>198</b>	370	197	366	199	8	<b>368</b>	<b>198</b>	370	197	366	199		
435.gromacs	8	327	175	328	174	<b>327</b>	<b>174</b>	8	<b>320</b>	<b>179</b>	320	179	320	179		
436.cactusADM	8	<b>368</b>	<b>260</b>	371	258	364	263	8	<b>368</b>	<b>260</b>	371	258	364	263		
437.leslie3d	8	401	188	<b>401</b>	<b>188</b>	402	187	8	401	188	<b>401</b>	<b>188</b>	402	187		
444.namd	8	641	100	<b>641</b>	<b>100</b>	641	100	8	<b>629</b>	<b>102</b>	629	102	628	102		
447.dealII	8	398	230	397	230	<b>397</b>	<b>230</b>	8	398	230	397	230	<b>397</b>	<b>230</b>		
450.soplex	8	<b>467</b>	<b>143</b>	465	144	469	142	8	<b>467</b>	<b>143</b>	465	144	469	142		
453.povray	8	221	192	<b>220</b>	<b>193</b>	220	194	8	186	229	<b>186</b>	<b>229</b>	186	229		
454.calculix	8	310	213	<b>310</b>	<b>213</b>	310	213	8	310	213	<b>310</b>	<b>213</b>	310	213		
459.GemsFDTD	8	612	139	<b>609</b>	<b>139</b>	608	140	8	612	139	<b>609</b>	<b>139</b>	608	140		
465.tonto	8	<b>446</b>	<b>176</b>	446	176	448	176	8	421	187	<b>421</b>	<b>187</b>	421	187		
470.lbm	8	374	294	<b>374</b>	<b>294</b>	375	293	8	374	294	<b>374</b>	<b>294</b>	375	293		
481.wrf	8	<b>344</b>	<b>260</b>	345	259	344	260	8	<b>339</b>	<b>264</b>	339	264	339	264		
482.sphinx3	8	<b>825</b>	<b>189</b>	825	189	827	189	8	<b>825</b>	<b>189</b>	825	189	827	189		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 198

Huawei RH2288 V2 (Intel Xeon E5-2603 v2)

SPECfp\_rate\_base2006 = 195

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

## Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Custom

Baseboard Management Controller used to adjust the fan speed to 100%

Sysinfo program /spec14/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191

running on speccputest Fri Oct 10 13:49:27 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2603 v2 @ 1.80GHz

2 "physical id"s (chips)

8 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 4

siblings : 4

physical 0: cores 0 1 2 3

physical 1: cores 0 1 2 3

cache size : 10240 KB

From /proc/meminfo

MemTotal: 264478184 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d

Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/\*release\* /etc/\*version\*

redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)

system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:6server:ga:server

uname -a:

Linux speccputest 2.6.32-431.el6.x86\_64 #1 SMP Sun Nov 10 22:19:54 EST 2013

x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Oct 10 02:39

SPEC is set to: /spec14

Filesystem Type Size Used Avail Use% Mounted on

/dev/sda2 ext4 451G 56G 373G 13% /

Additional information from dmidecode:

BIOS Insyde Corp. RMIBV379 03/19/2014

Memory:

16x Hynix HMT42GR7MFR4C-PB 16 GB 1333 MHz 2 rank

8x NO DIMM NO DIMM

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 198

Huawei RH2288 V2 (Intel Xeon E5-2603 v2)

SPECfp\_rate\_base2006 = 195

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Oct-2014  
Hardware Availability: Sep-2013  
Software Availability: Nov-2013

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/spec14/libs/32:/spec14/libs/64:/spec14/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 198

Huawei RH2288 V2 (Intel Xeon E5-2603 v2)

SPECfp\_rate\_base2006 = 195

CPU2006 license: 3175

Test date: Oct-2014

Test sponsor: Huawei

Hardware Availability: Sep-2013

Tested by: Huawei

Software Availability: Nov-2013

## Base Portability Flags (Continued)

465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 198

Huawei RH2288 V2 (Intel Xeon E5-2603 v2)

SPECfp\_rate\_base2006 = 195

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

## Peak Optimization Flags

### C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

### C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

### Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 198

Huawei RH2288 V2 (Intel Xeon E5-2603 v2)

SPECfp\_rate\_base2006 = 195

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

## Peak Optimization Flags (Continued)

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Dec 16 13:09:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 16 December 2014.