



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint®2006 = 48.8

HA8000-bd (Intel Xeon E3-1240L v3)

SPECint_base2006 = 47.4

CPU2006 license: 35


Test sponsor: HITACHI

Tested by: HITACHI

Test date: Sep-2014

Hardware Availability: Oct-2014

Software Availability: Feb-2013

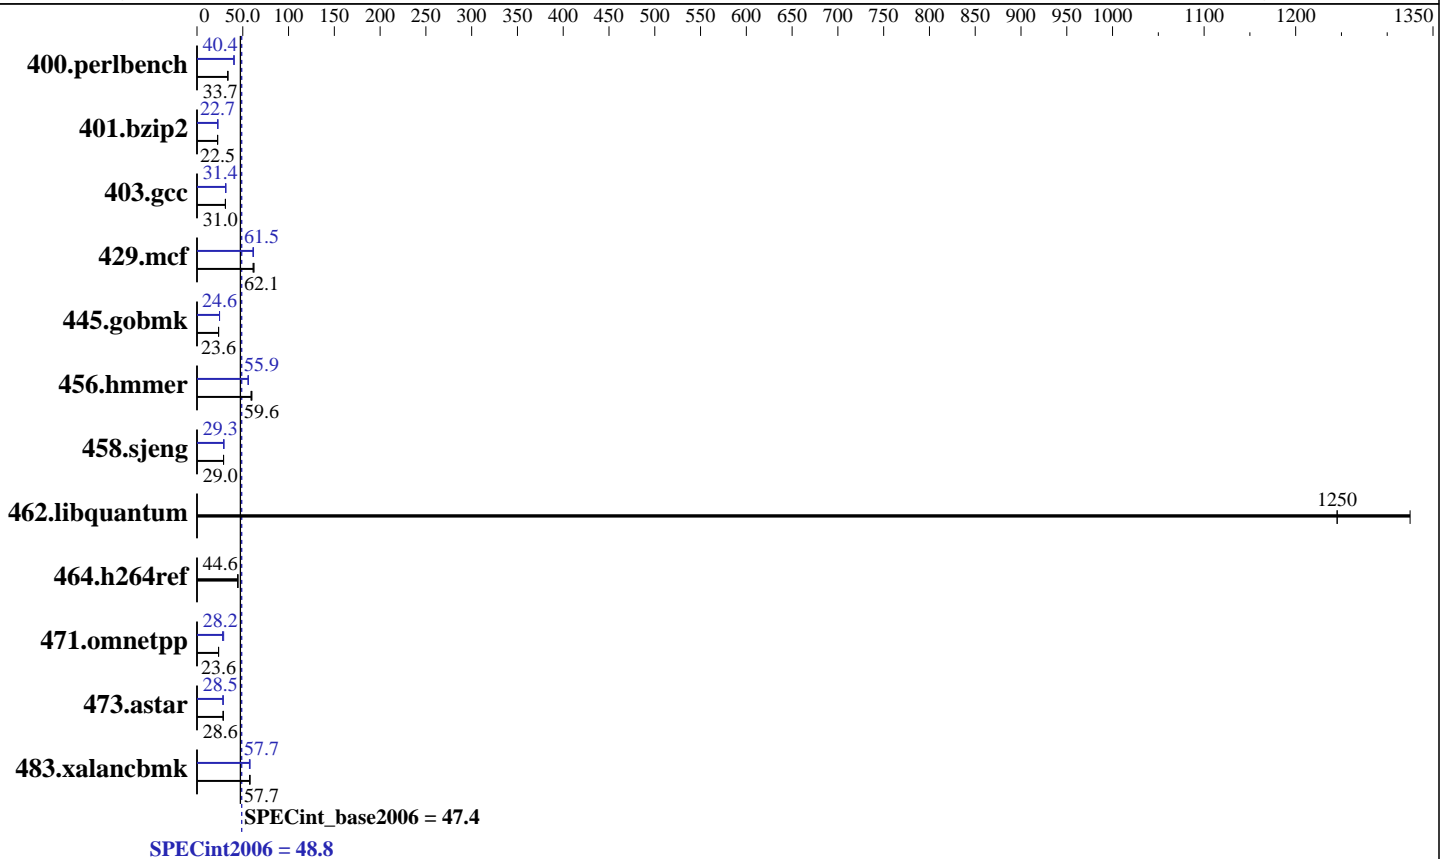

Hardware

CPU Name: Intel Xeon E3-1240L v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (4 x 8 GB 2Rx8 PC3-12800E-11, ECC)
 Disk Subsystem: 1 x 1000 GB SATA, 7200RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 2.6.32-358.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint2006 = **48.8**

HA8000-bd (Intel Xeon E3-1240L v3)

SPECint_base2006 = **47.4**

CPU2006 license: 35
Test sponsor: HITACHI
Tested by: HITACHI

Test date: Sep-2014
Hardware Availability: Oct-2014
Software Availability: Feb-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	291	33.6	290	33.7	290	33.7	242	40.4	242	40.4	242	40.4
401.bzip2	428	22.5	429	22.5	430	22.5	425	22.7	425	22.7	425	22.7
403.gcc	259	31.0	259	31.1	259	31.0	256	31.4	256	31.5	258	31.2
429.mcf	147	62.1	147	62.1	149	61.2	149	61.1	148	61.5	148	61.7
445.gobmk	446	23.5	445	23.6	445	23.6	426	24.6	426	24.6	426	24.6
456.hammer	156	60.0	158	59.0	157	59.6	167	56.0	167	55.9	167	55.9
458.sjeng	417	29.0	417	29.0	417	29.0	414	29.2	413	29.3	413	29.3
462.libquantum	15.6	1320	16.6	1250	16.6	1250	15.6	1320	16.6	1250	16.6	1250
464.h264ref	497	44.5	496	44.6	496	44.6	497	44.5	496	44.6	496	44.6
471.omnetpp	265	23.6	266	23.5	265	23.6	222	28.1	222	28.2	215	29.1
473.astar	246	28.6	244	28.8	246	28.6	246	28.5	245	28.6	248	28.3
483.xalancbmk	119	57.9	119	57.7	120	57.5	121	57.3	119	57.8	120	57.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /home/cpu2006/cpu2006/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Wed Sep 10 03:49:24 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1240L v3 @ 2.00GHz
 1 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 4
siblings : 8
physical 0: cores 0 1 2 3
cache size : 8192 KB
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint2006 = 48.8

HA8000-bd (Intel Xeon E3-1240L v3)

SPECint_base2006 = 47.4

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Sep-2014

Hardware Availability: Oct-2014

Software Availability: Feb-2013

Platform Notes (Continued)

From /proc/meminfo

MemTotal: 32958232 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb_release -d

Red Hat Enterprise Linux Server release 6.4 (Santiago)

From /etc/*release* /etc/*version*

redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)

system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)

system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:

Linux localhost.localdomain 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Sep 8 20:01

SPEC is set to: /home/cpu2006/cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/VolGroup-lv_home	ext4	172G	21G	144G	13%	/home

Additional information from dmidecode:

BIOS American Megatrends Inc. P2_03 09/04/2014

Memory:

4x 8 GB

4x 1323 SMD3L-N8G28HA-16K 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/home/cpu2006/cpu2006/libs/32:/home/cpu2006/cpu2006/libs/64:/home/cpu2006/cpu2006/sh"

OMP_NUM_THREADS = "4"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB

memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint2006 = 48.8

HA8000-bd (Intel Xeon E3-1240L v3)

SPECint_base2006 = 47.4

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Sep-2014

Hardware Availability: Oct-2014

Software Availability: Feb-2013

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 471.omnetpp: -DSPEC_CPU_LP64
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint2006 = 48.8

HA8000-bd (Intel Xeon E3-1240L v3)

SPECint_base2006 = 47.4

CPU2006 license: 35

Test date: Sep-2014

Test sponsor: HITACHI

Hardware Availability: Oct-2014

Tested by: HITACHI

Software Availability: Feb-2013

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
 401.bzip2: `-DSPEC_CPU_LP64`
 403.gcc: `-DSPEC_CPU_LP64`
 429.mcf: `-DSPEC_CPU_LP64`
 456.hmmer: `-DSPEC_CPU_LP64`
 458.sjeng: `-DSPEC_CPU_LP64`
 462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
 464.h264ref: `-DSPEC_CPU_LP64`
 473.astar: `-DSPEC_CPU_LP64`
 483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias`

401.bzip2: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias`

403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc -opt-malloc-options=3 -auto-ilp32`

429.mcf: `-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32`

445.gobmk: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias`

456.hmmer: `-xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32 -ansi-alias`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint2006 = 48.8

HA8000-bd (Intel Xeon E3-1240L v3)

SPECint_base2006 = 47.4

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Sep-2014

Hardware Availability: Oct-2014

Software Availability: Feb-2013

Peak Optimization Flags (Continued)

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Dec 16 13:09:35 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 December 2014.