



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint®2006 = **68.1**

ASUS TS700-E8(Z10PE-D16WS) Server System (Intel Xeon E5-2699 v3)

SPECint_base2006 = **64.6**

CPU2006 license: 9016


Test date: Feb-2015

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Sep-2014

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2013

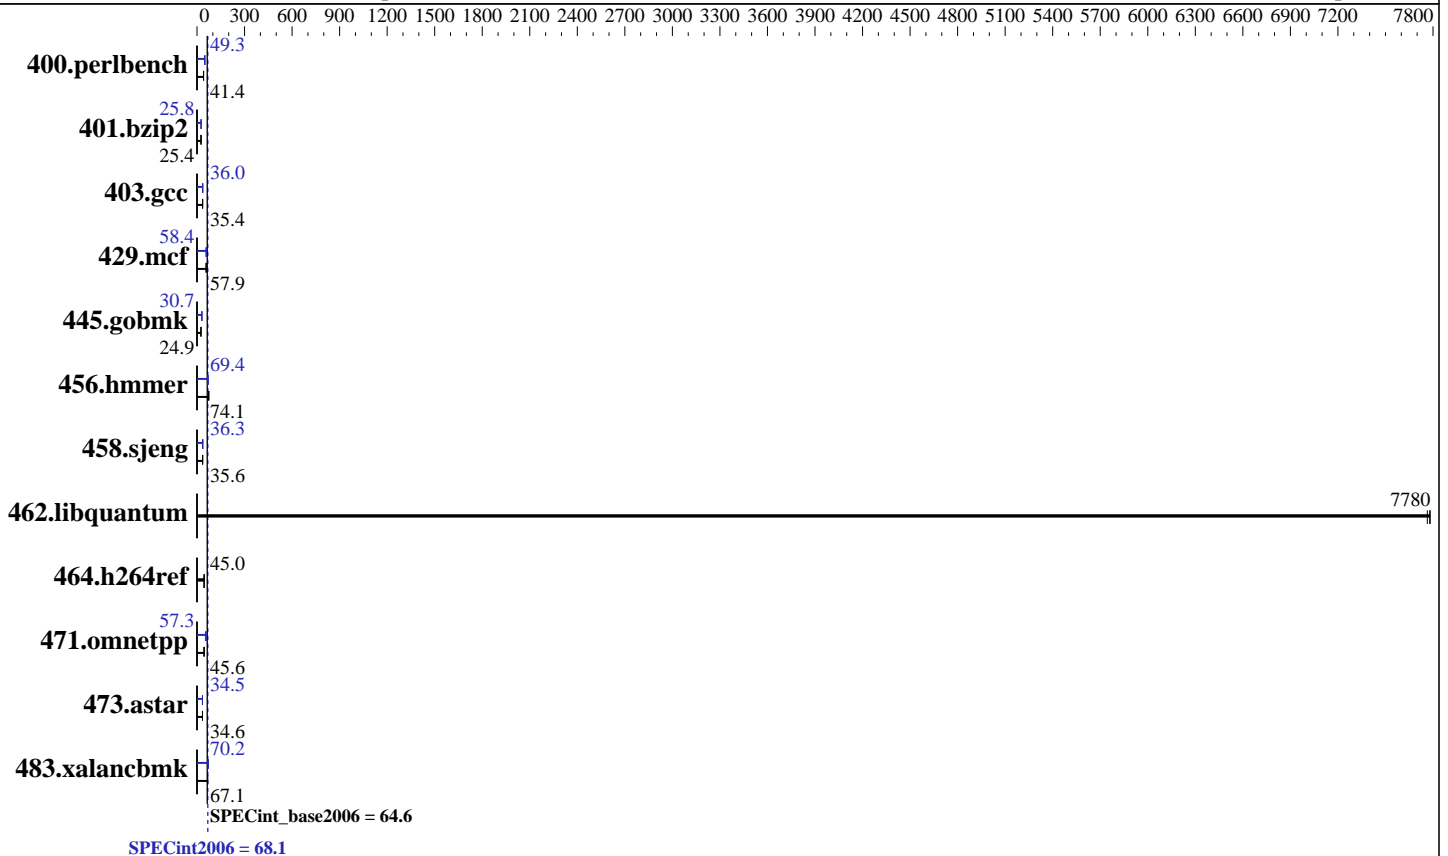

Hardware

CPU Name: Intel Xeon E5-2699 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 36 cores, 2 chips, 18 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 45 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: HITACHI HDP725050GLA380 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS TS700-E8(Z10PE-D16WS) Server System (Intel Xeon E5-2699 v3)

SPECint2006 = **68.1**

SPECint_base2006 = **64.6**

CPU2006 license: 9016

Test sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	236	41.4	237	41.3	236	41.4	<u>198</u>	<u>49.3</u>	199	49.2	198	49.3
401.bzip2	380	25.4	380	25.4	380	25.4	374	25.8	<u>374</u>	<u>25.8</u>	374	25.8
403.gcc	<u>228</u>	35.4	227	35.5	228	35.3	224	36.0	<u>224</u>	36.0	224	36.0
429.mcf	157	58.3	158	57.9	158	57.8	<u>156</u>	58.4	158	57.6	156	58.6
445.gobmk	421	24.9	<u>421</u>	24.9	421	24.9	342	30.7	342	30.7	<u>342</u>	30.7
456.hammer	128	72.8	125	74.7	<u>126</u>	74.1	135	69.3	<u>135</u>	69.4	134	69.6
458.sjeng	339	35.6	340	35.6	341	35.4	334	36.3	334	36.2	334	36.3
462.libquantum	2.66	7780	2.66	7780	2.67	7760	<u>2.66</u>	<u>7780</u>	2.66	7780	2.67	7760
464.h264ref	491	45.0	493	44.9	491	45.1	<u>491</u>	45.0	493	44.9	491	45.1
471.omnetpp	<u>137</u>	45.6	136	45.9	144	43.4	117	53.3	<u>109</u>	<u>57.3</u>	109	57.6
473.astar	<u>203</u>	34.6	203	34.5	202	34.7	201	34.9	<u>204</u>	34.5	204	34.5
483.xalancbmk	103	66.8	103	67.1	102	67.3	98.1	70.3	98.5	70.0	<u>98.2</u>	70.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:

Snoop Mode = Home Snoop

OC Tune Level = Level 2

Energy Performance BIAS setting = Performance

Link Frequency Select = 9.6GT/s

Enforce POR = Disabled

Memory Frequency = 2133

FAN = Full Speed

Sysinfo program /cpu2006/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191

running on localhost.localdomain Wed Feb 4 09:32:13 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2699 v3 @ 2.30GHz

2 "physical id"s (chips)

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint2006 = 68.1

ASUS TS700-E8(Z10PE-D16WS) Server System (Intel Xeon E5-2699 v3)

SPECint_base2006 = 64.6

CPU2006 license: 9016

Test date: Feb-2015

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Sep-2014

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2013

Platform Notes (Continued)

72 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 18
siblings  : 36
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 46080 KB
```

From /proc/meminfo

```
MemTotal:      264630672 kB
HugePages_Total: 0
Hugepagesize:   2048 kB
```

/usr/bin/lsb_release -d

```
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

From /etc/*release* /etc/*version*

```
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54
EST 2013 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Feb 3 21:36

SPEC is set to: /cpu2006

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal        ext4  459G  188G  248G  44% /
```

Additional information from dmidecode:

```
BIOS American Megatrends Inc. 0902 01/28/2015
Memory:
16x 16 GB
16x Micron 36ASF2G72PZ-2G1A2 16 GB 2133 MHz 2 rank
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"
OMP_NUM_THREADS = "36"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4
Transparent Huge Pages enabled with:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint2006 = 68.1

ASUS TS700-E8(Z10PE-D16WS) Server System (Intel Xeon E5-2699 v3)

SPECint_base2006 = 64.6

CPU2006 license: 9016

Test date: Feb-2015

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Sep-2014

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2013

General Notes (Continued)

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint2006 = 68.1

ASUS TS700-E8(Z10PE-D16WS) Server System (Intel Xeon E5-2699 v3)

SPECint_base2006 = 64.6

CPU2006 license: 9016

Test date: Feb-2015

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Sep-2014

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2013

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-prefetch -ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
 -opt-prefetch -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
 -opt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
 -opt-prefetch -auto-p32

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
 -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint2006 = 68.1

ASUS TS700-E8(Z10PE-D16WS) Server System (Intel Xeon E5-2699 v3)

SPECint_base2006 = 64.6

CPU2006 license: 9016

Test date: Feb-2015

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Sep-2014

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

456.hmmr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-ansi-alias

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmarheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-auto-p32 -Wl,-z,muldefs -L/sh -lsmarheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-ansi-alias -Wl,-z,muldefs -L/sh -lsmarheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>

<http://www.spec.org/cpu2006/flags/ASUSTekPlatformWS-Settings-V1.2-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>

<http://www.spec.org/cpu2006/flags/ASUSTekPlatformWS-Settings-V1.2-revA.xml>



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS TS700-E8(Z10PE-D16WS) Server System (Intel Xeon E5-2699 v3)

SPECint2006 = 68.1

SPECint_base2006 = 64.6

CPU2006 license: 9016

Test sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2013

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Feb 25 11:31:15 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 February 2015.